


PXP4040/C/A/3M00 Datasheet

Product Name // Fully Overmoulded USB Cable
PXP4040/C/A Series USB Standard A Plug To Sealed C-Type Plug 3m Cable

 [View Product Page](#)

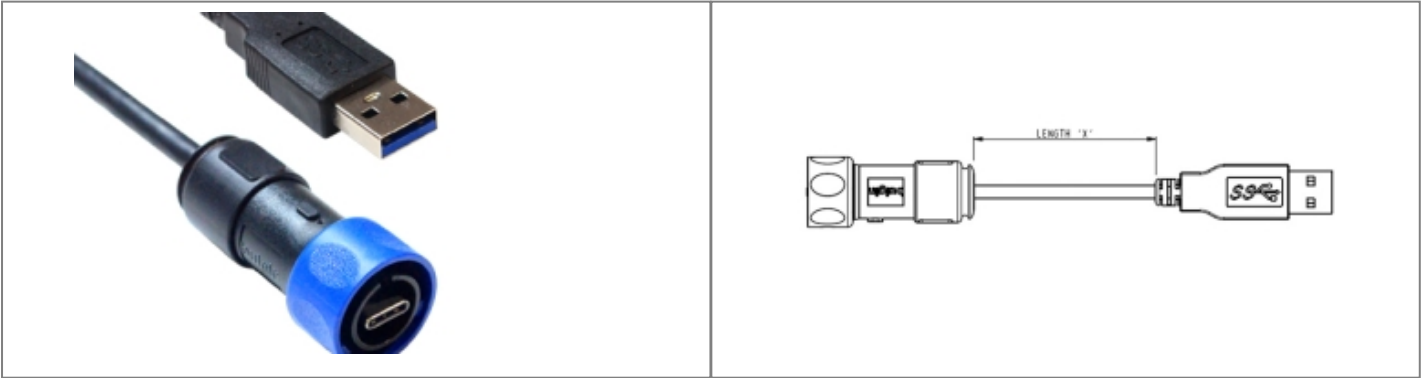

// Product Description:

- Pre-Wired C-Type USB V3.2 Gen 1 Cable
- Standard USB Type A plug to Sealed C-Type USB plug
- Sealed to IP66, IP67, IP68, IP69K when mated with compatible connector
- 3m cable length
- PXP4081 Sealing Cap available separately to maintain IP rating of unmated connectors
- Mate with PXP4043/C Rear Panel Mount Connector

// General Information:

Product Display Title:	Pre-Wired C-Type USB V3.2 Gen 1 Cable
Product Family:	Circular Data Connectors
Product Series:	4000 Series - C-Type USB Buccaneer
Body Material:	Polycarbonate/Polybutylene Terephthalate (PC/PBT)
Contact Type:	Plug Contact
Coupling Type:	Bayonet Lock
Flamability Rating:	UL94V-0
Function:	Flex to Standard Connector Double Ended Cable
Ip Rating:	IP67, IP68, IP69K
Max Operating Temperature:	+70°C
Min Operating Temperature:	-40°C
Number Of Contacts:	24 Contacts

// Product PDF Links

 [C-Type Technical Product Datasheet](#)

// Product 3D CAD Model Links

 [PXP4040/C/A/3M003D CAD Model](#)



Have a question or project enquiry
you'd like to talk to us about?



[Click Here To Contact Us](#)