

# FLKM 14-PA-ET200SP - Front adapter



1166173

<https://www.phoenixcontact.com/us/products/1166173>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



VARIOFACE front adapter for Siemens SIMATIC® ET200SP, with a 14-pos. FLK/IDC male strip, max. 8 channels can be connected

## Commercial data

Item number	1166173
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	C421
Product key	DK231R
GTIN	4063151180829
Weight per piece (including packing)	27.7 g
Weight per piece (excluding packing)	35 g
Customs tariff number	85366990
Country of origin	DE

1166173

<https://www.phoenixcontact.com/us/products/1166173>

## Technical data

### Product properties

Product type	Front adapter
Product family	VARIOFACE

#### Insulation characteristics: Air clearances and creepage distances

Insulation	Functional insulation
Overvoltage category	II
Pollution degree	2

### Electrical properties

Operating voltage (DC)	≤ 60 V DC
Nominal operating mode	100% operating factor
Current (per branch)	≤ 1 A
Current (Voltage supply via IDC/FLK)	≤ 3 A
Current (Voltage supply via Push-in connection)	≤ 8 A

#### Air clearances and creepage distances

Rated insulation voltage	63 V
Rated surge voltage	0.6 kV (1.2/50 μs)

#### Supported controller SIEMENS ET 200SP

Suitable base unit	6ES7193-6BP00-0BA0
	6ES7193-6BP00-2BA0
	6ES7193-6BP00-0DA0
	6ES7193-6BP00-2DA0
Suitable I/O module	6ES7131-6BF01-0BA0 (Base Units A0/A1)
	6ES7131-6BF01-2BA0 (Base Units A0/A1)
	6ES7131-6BF01-0AA0 (Base Units A0/A1)
	6ES7131-6BF01-2AA0 (Base Units A0/A1)
	6ES7131-6BF60-0AA0 (Base Units A0/A1)
	6ES7131-6BF00-0CA0 (Base Units A0/A1)
	6ES7131-6BF00-0DA0 (Base Units A0/A1)
	6ES7132-6BF01-0BA0 (Base Units A0/A1)
	6ES7132-6BF01-2BA0 (Base Units A0/A1)
	6ES7132-6BF01-0AA0 (Base Units A0/A1)
	6ES7132-6BF01-2AA0 (Base Units A0/A1)
	6ES7132-6BF61-0AA0 (Base Units A0/A1)
	6ES7132-6BF01-0CA0 (Base Units A0/A1)

### Connection data

#### Connection 1 (control level)

Connection method	Plug-in connection
-------------------	--------------------

# FLKM 14-PA-ET200SP - Front adapter



1166173

<https://www.phoenixcontact.com/us/products/1166173>

Number of connections	1
Number of positions	18

## Connection 2 (field level)

Connection in acc. with standard	IEC 60603-13
Connection method	IDC/FLK pin strip
Number of connections	1
Number of positions	14
Insertion/withdrawal cycles	> 50
Pitch	2.54 mm

## Connection 3 (supply)

Connection method	Push-in spring connection
Stripping length	9 mm
Number of connections	1
Number of positions	2
Conductor cross-section rigid	0.14 mm <sup>2</sup> ... 1.5 mm <sup>2</sup>
Conductor cross-section flexible	0.14 mm <sup>2</sup> ... 1.5 mm <sup>2</sup>
	0.25 mm <sup>2</sup> ... 1.5 mm <sup>2</sup> (Ferrule without plastic sleeve)
	0.25 mm <sup>2</sup> ... 0.75 mm <sup>2</sup> (Ferrule with plastic sleeve)
Conductor cross-section AWG	26 ... 16
Pitch	3.81 mm

## Dimensions

### Item dimensions

Width	14.9 mm
Height	52.95 mm
Depth	48.99 mm

## Environmental and real-life conditions

### Ambient conditions

Degree of protection (Module)	IP00
Degree of protection (Installation location)	≥ IP54
Ambient temperature (operation)	-20 °C ... 60 °C
Ambient temperature (storage/transport)	-20 °C ... 70 °C
Altitude	≤ 2000 m

## Approvals

### UL, USA/Canada

Identification	UL 508 Recognized
----------------	-------------------

## Standards and regulations

### Air clearances and creepage distances

# FLKM 14-PA-ET200SP - Front adapter



1166173

<https://www.phoenixcontact.com/us/products/1166173>

Standards/regulations	EN IEC 60664-1
-----------------------	----------------

## Mounting


Mounting type	Plug-in mounting
Mounting position	any

## Notes

Notes on operation	For proper use, the specifications of the installation directive (see Downloads) must be observed. For applications or use with third-party products, the specifications, and the safety and warning instructions of the respective third-party manufacturer must also be met.
--------------------	--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

Drawings

Circuit diagram

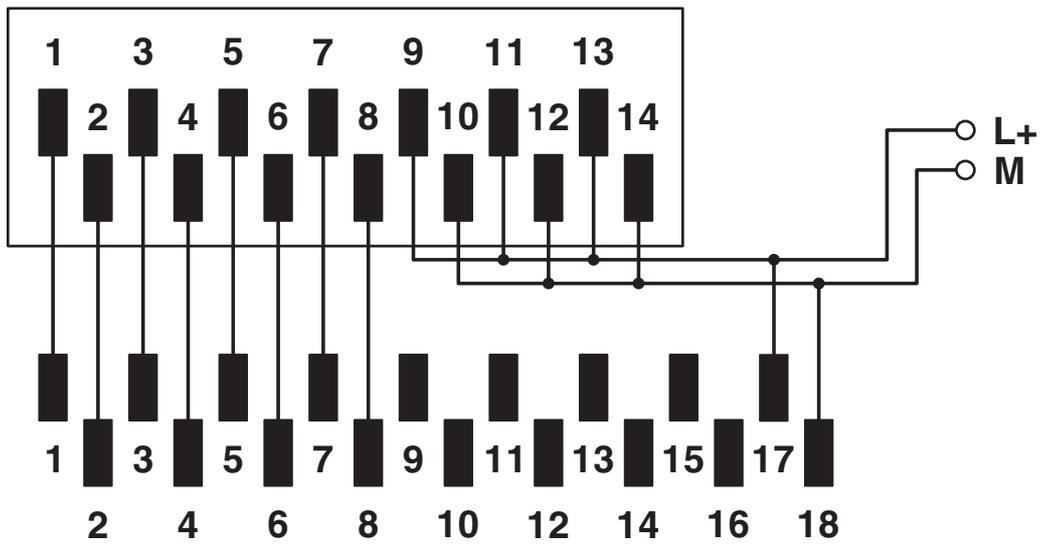

# FLKM 14-PA-ET200SP - Front adapter



1166173

<https://www.phoenixcontact.com/us/products/1166173>

## Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/1166173>



**UL Listed**

Approval ID: E238705



**cUL Listed**

Approval ID: E238705

# FLKM 14-PA-ET200SP - Front adapter



1166173

<https://www.phoenixcontact.com/us/products/1166173>

## Classifications

### ECLASS

ECLASS-13.0	27242292
ECLASS-15.0	27242292

### ETIM

ETIM 9.0	EC002584
----------	----------

### UNSPSC

UNSPSC 21.0	32151600
-------------	----------

# FLKM 14-PA-ET200SP - Front adapter



1166173

<https://www.phoenixcontact.com/us/products/1166173>

## Environmental product compliance

### EU RoHS

Fulfills EU RoHS substance requirements	Yes, No exemptions
-----------------------------------------	--------------------

### China RoHS

Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits

### EU REACH SVHC

REACH candidate substance (CAS No.)	No substance above 0.1 wt%
-------------------------------------	----------------------------

Phoenix Contact 2025 © - all rights reserved  
<https://www.phoenixcontact.com>

Phoenix Contact USA  
586 Fulling Mill Road  
Middletown, PA 17057, United States  
(+717) 944-1300  
[info@phoenixcon.com](mailto:info@phoenixcon.com)