
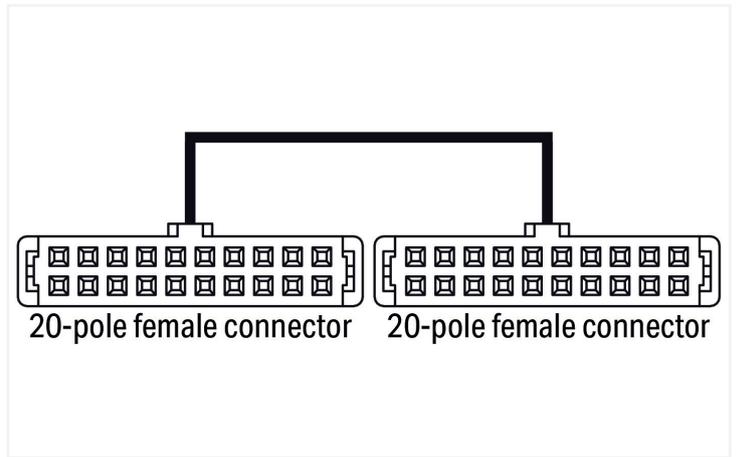


Data Sheet | Item Number: 706-3057/300-200

System cable; for Schneider TSX; 16 digital inputs or outputs; Length: 2 m; Conductor cross-section: 0.14 mm²

<https://www.wago.com/706-3057/300-200>

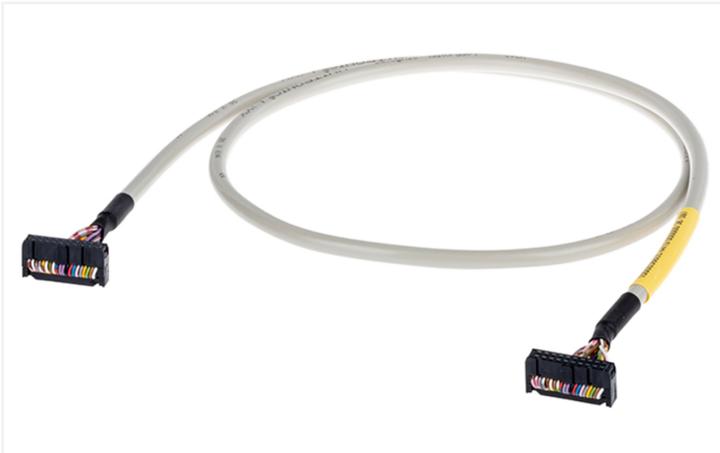

Color coding acc. to DIN VDE 47100	Interface connector		PLC connector	
	Pin number	Wiring	Pin number	Signal
White	1	0.0	1	IN/OUT1
Brown	2	0.1	2	IN/OUT2
Green	3	0.2	3	IN/OUT3
Yellow	4	0.3	4	IN/OUT4
Grey	5	0.4	5	IN/OUT5
Pink	6	0.5	6	IN/OUT6
Blue	7	0.6	7	IN/OUT7
Red	8	0.7	8	IN/OUT8
Black	9	1.0	9	IN/OUT9
Violet	10	1.1	10	IN/OUT10
Grey-Pink	11	1.2	11	IN/OUT11
Red-Blue	12	1.3	12	IN/OUT12
White-Green	13	1.4	13	IN/OUT13
Brown-Green	14	1.5	14	IN/OUT14
White-Yellow	15	1.6	15	IN/OUT15
Yellow-Brown	16	1.7	16	IN/OUT16
White-Grey	17	+24V	17	Alim+
Grey-Brown	18	0V	18	Alim-
White-Pink	19	+24V	19	Alim+
Pink-Brown	20	0V	20	Alim-

Short description:

WAGO's Interface Cables provide fast and easy connection of WAGO I/O Modules equipped with a 20-pole pluggable connector (750-1400, -1402, -1500, -1501, -1502) to the appropriate interface or relay modules (16-channel) featuring a 20-pole pluggable connector. The cables are available in 1-, 2- and 3-meter lengths; each has one 20-pole pluggable connector at both ends.

Notes

Note	When using more than 10 wires, the maximum current per wire must be reduced to 0.7 A.
------	---

Electrical data

Inputs/outputs	16 digital inputs or outputs
Operating voltage	≤ 35 VAC/VDC
Current per wire (max.)	1 A

Compatibility

Schneider

Schneider Modicon Quantum	140 DDI 364 00 140 DDO 364 00
Schneider TSX	TSX DEY 16FK TSX DEY 32D2K TSX DEY 64D2K TSX DEZ 12D2K TSX DMY 28FK TSX DMY 28RFK TSX DMZ 28DTK TSX DMZ 64DTK TSX DSY 32T2K TSX DSY 64T2K

WAGO

WAGO I/O System 750	750-1400 750-1500 750-1502
---------------------	----------------------------------

Connection data

Cable type	LiYY
Color code	per DIN VDE 47100

Connection 1

Pluggable connector	Pluggable connector per DIN 41651; female connector
Pole number 1	20
Connection type	System
Wire cross-section	0.14 mm ²

Connection 2

Connector	Pluggable connector per DIN 41651; female connector
Pole number	20
Connection type	System

Physical data

Cable length	2 m
--------------	-----

Material data

Fire load	0 MJ
Weight	161 g

Environmental requirements	
Ambient temperature (operation)	-20 ... +50 °C

Commercial data	
Product Group	30 (WAGO France)
PU (SPU)	1 pcs
Packaging type	not specified
Country of origin	FR
GTIN	4045454873776
Customs tariff number	85444290900

Product Classification	
UNSPSC	26121629
eCl@ss 10.0	27-06-03-11
eCl@ss 9.0	27-06-03-11
ETIM 9.0	EC000237
ETIM 8.0	EC000237
ECCN	NO US CLASSIFICATION

Environmental Product Compliance	
RoHS Compliance Status	Compliant, No Exemption

Downloads

Environmental Product Compliance

Compliance Search	
Environmental Product Compliance 706-3057/300-200	↓

Documentation

Bid Text			
706-3057/300-200	19.02.2019	xml 3.41 KB	↓
706-3057/300-200	26.11.2018	docx 14.76 KB	↓

CAD/CAE-Data

CAE data	
WSCAD Universe 706-3057/300-200	↓

1 Compatible Products

1.1 Optional Accessories

1.1.1 Interface module

1.1.1.1 Interface module



Item No.: 704-2004

Interface module for system wiring; Pluggable connector per DIN 41651; Male connector; 20-pole; 16-channel digital input or output; 1-wire connection; in mounting carrier



Item No.: 704-2024

Interface module for system wiring; Pluggable connector per DIN 41651; Male connector; 20-pole; 16-channel digital input or output; 2-wire connection; in mounting carrier



Item No.: 704-2044

Interface module for system wiring; Pluggable connector per DIN 41651; Male connector; 20-pole; 16-channel digital input or output; 2-wire connection; in mounting carrier



Item No.: 704-2054

Interface module for system wiring; Pluggable connector per DIN 41651; Male connector; 20-pole; 16-channel digital input or output; 3-wire connection; in mounting carrier



Item No.: 704-5004

Interface module for system wiring; Pluggable connector per DIN 41651; Male connector; 20-pole; 16-channel relay output; 1 changeover contact; Double-deck PCB terminal blocks; in mounting carrier; 2,50 mm²



Item No.: 704-5014

Interface module for system wiring; Pluggable connector per DIN 41651; Male connector; 20-pole; 16-channel relay output; 1 changeover contact; Double-deck PCB terminal blocks; without relay; in mounting carrier; 2,50 mm²



Item No.: 704-5034

Interface module for system wiring; Pluggable connector per DIN 41651; Male connector; 20-pole; 16-channel relay output; 1 changeover contact; PCB terminal blocks; with output fuse; in mounting carrier; 2,50 mm²



Item No.: 704-5024

Interface module for system wiring; Pluggable connector per DIN 41651; Male connector; 20-pole; 16-channel relay output; 1 changeover contact; Triple-deck PCB terminal blocks; in mounting carrier; 2,50 mm²



Item No.: 704-5044

Interface module for system wiring; Pluggable connector per DIN 41651; Male connector; 20-pole; 16-channel relay output; 1 changeover contact; Triple-deck PCB terminal blocks; with manual operation; in mounting carrier; 2,50 mm²



Item No.: 704-5054

Interface module for system wiring; Pluggable connector per DIN 41651; Male connector; 20-pole; 16-channel relay output; 1 make contact; with disconnect terminal block and fuse; in mounting carrier; 2,50 mm²



Item No.: 704-5074

Interface module for system wiring; Pluggable connector per DIN 41651; Male connector; 20-pole; 16-channel relay output; 1 make contact; with disconnect terminal block and fuse; in mounting carrier; 2,50 mm²



Item No.: 704-5064

Interface module for system wiring; Pluggable connector per DIN 41651; Male connector; 20-pole; 16-channel relay output; 2 changeover contacts; Double-deck PCB terminal blocks; in mounting carrier; 2,50 mm²



Item No.: 289-614

Interface module; Pluggable connector per DIN 41651; 20-pole; Triple-deck PCB terminal blocks; in mounting carrier; 2,50 mm²