

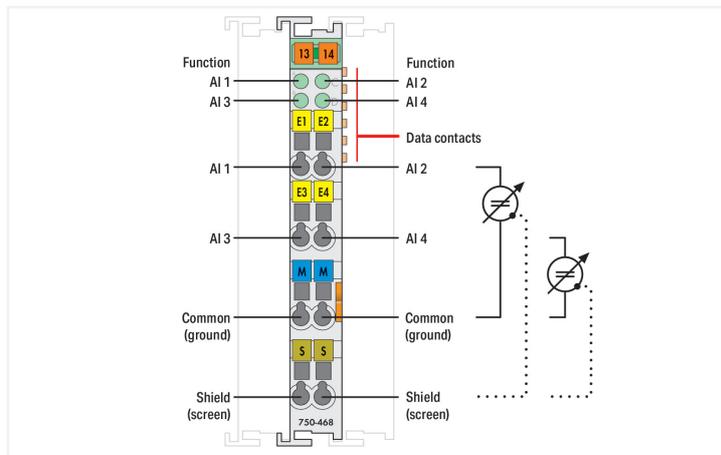


**Data Sheet | Item Number: 750-468**  
**4-channel analog input; 0 ... 10 VDC; Single-ended**

<https://www.wago.com/750-468>

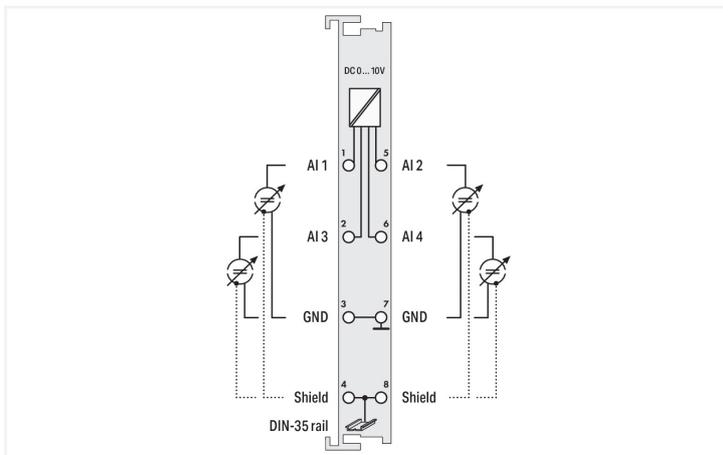

Color: ■ light gray

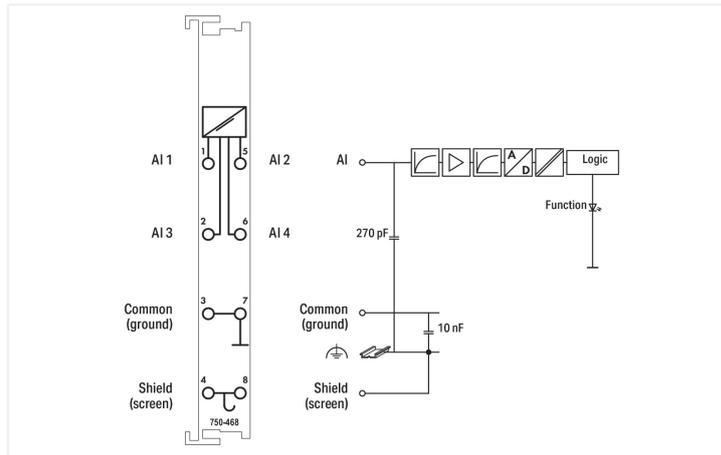

This analog input module processes standard 0–10 V signals.  
 The input signal is electrically isolated and is transmitted with a resolution of 12 bits.  
 The internal system supply powers the module.  
 The input channels of the module have a common ground potential.  
 The shield directly connects to the DIN-rail.

| Technical data   |  |
|--|--|
| Number of analog inputs  | 4  |
| Total number of channels (module)                              | 4  |
| Signal type  | Voltage  |
| Signal type (voltage)  | 0 ... 10 VDC   |
| Sensor connection  | 4 x (2-wire)   |
| Input voltage (max.)   | 35 V   |
| Signal characteristics   | Single-ended   |
| Resolution [bit]   | 12 bits  |
| Data width   | 4 x 16-bit data; 4 x 8-bit control/status (optional) |
| Internal resistance  | 133 kΩ   |
| Conversion time (typ.)   | 4 ms   |
| Measurement error (reference temperature)                      | 25 °C  |
| Measurement error, deviation (max.) from the upper-range value | 0.2 %  |
| Temperature error (max.) of the upper-range value              | 0.01 %/K   |
| Supply voltage (system)  | 5 VDC; via data contacts                             |
| Current consumption (5 V system supply)                        | 60 mA  |
| Isolation  | 500 V system/field                                   |
| Indicators   | LED (A-D) green: Function AI 1 ... AI 4              |

### Connection data

|                                       |  |
|---------------------------------------|--|
| Connection technology: inputs/outputs | 8 x CAGE CLAMP®                              |
| Connectable conductor materials       | Copper                                       |
| Connection type 1                     | Inputs/outputs                               |
| Solid conductor                       | 0.08 ... 2.5 mm <sup>2</sup> / 28 ... 14 AWG |
| Fine-stranded conductor               | 0.08 ... 2.5 mm <sup>2</sup> / 28 ... 14 AWG |
| Strip length                          | 8 ... 9 mm / 0.31 ... 0.35 inches            |

### Physical data

|                                   |                        |
|-----------------------------------|------------------------|
| Width                             | 12 mm / 0.472 inches   |
| Height                            | 100 mm / 3.937 inches  |
| Depth                             | 69.8 mm / 2.748 inches |
| Depth from upper-edge of DIN-rail | 62.6 mm / 2.465 inches |

### Mechanical data

|               |             |
|---------------|-------------|
| Mounting type | DIN-35 rail |
|---------------|-------------|

### Material data

|                    |                              |
|--------------------|------------------------------|
| Color              | light gray                   |
| Housing material   | Polycarbonate; polyamide 6.6 |
| Fire load          | 1.034 MJ                     |
| Weight             | 50 g                         |
| Conformity marking | CE                           |

### Environmental requirements

|  |  |
|--|--|
| Ambient temperature (operation)  | 0 ... +55 °C   |
| Ambient temperature (storage)  | -40 ... +85 °C   |
| Protection type  | IP20   |
| Pollution degree   | 2 per IEC 61131-2  |
| Operating altitude   | 0 ... 2000 m / 0 ... 6562 ft   |
| Mounting position  | Horizontal left, horizontal right, horizontal top, horizontal bottom, vertical top and vertical bottom |
| Relative humidity (without condensation)   | 95 %   |
| Vibration resistance   | 4g per IEC 60068-2-6   |
| Shock resistance   | 15g per IEC 60068-2-27   |
| EMC immunity to interference   | per EN 61000-6-2, marine applications  |
| EMC emission of interference   | per EN 61000-6-4, marine applications  |
| Exposure to pollutants   | per IEC 60068-2-42 and IEC 60068-2-43  |
| Permissible H <sub>2</sub> S contaminant concentration at a relative humidity 75 % | 10 ppm   |
| Permissible SO <sub>2</sub> contaminant concentration at a relative humidity 75 %  | 25 ppm   |

### Commercial data

|                       |                 |
|-----------------------|-----------------|
| Product Group         | 15 (I/O System) |
| PU (SPU)              | 1 pcs           |
| Packaging type        | Box             |
| Country of origin     | DE              |
| GTIN                  | 4045454393045   |
| Customs tariff number | 85389099990     |

| Product classification |          |
|------------------------|----------|
| UNSPSC                 | 32101505 |

| Environmental Product Compliance          |   |
|---|---|
| CAS-No.                                   | 1303-86-2<br>1317-36-8<br>7439-92-1       |
| REACH Candidate List Substance            | Diboron trioxide<br>Lead<br>Lead monoxide |
| RoHS Compliance Status                    | Compliant,With Exemption                  |
| RoHS Exemption                            | 7(c)-I                                    |
| SCIP notification number (Austria)        | e7aaa117-459b-48ed-bd1a-78103a4ec90a      |
| SCIP notification number (Belgium)        | b4732560-be27-4add-89d4-8b01d1fdb94c      |
| SCIP notification number (Bulgaria)       | efe21bae-c6ad-4050-81f7-475b71dbf5ff      |
| SCIP notification number (Czech Republic) | f14cf9e6-b783-4f29-a97f-92d282fe78ab      |
| SCIP notification number (Denmark)        | 9c80272a-db42-4714-8001-27faf7d4d90d      |
| SCIP notification number (Finland)        | 0d1c5795-bd99-459c-a950-f0b070ce6791      |
| SCIP notification number (France)         | 8edc96c5-494e-4c31-97d9-55b83aabc821      |
| SCIP notification number (Germany)        | d9769575-7478-49a9-a28e-6982263b9bb3      |
| SCIP notification number (Hungary)        | 217c8a89-0ea5-4753-a9a8-e036097e7930      |
| SCIP notification number (Italy)          | 1a75ba07-7fb0-48e4-9506-5d2cd19256fb      |
| SCIP notification number (Netherlands)    | f3e22162-0f82-4825-9bac-f8a142d0197a      |
| SCIP notification number (Poland)         | fe298e29-5678-409d-9e66-6d98f0678173      |
| SCIP notification number (Romania)        | 1cc45ef0-08e7-42db-a2a7-cbbac36adbcb      |
| SCIP notification number (Sweden)         | a52093aa-c42a-4010-aac9-a72c19749866      |

**Approvals / Certificates**

| General approvals   |                        |                     | Declarations of conformity and manufacturer's declarations |          |                  |
|---|------------------------|---------------------|--|----------|------------------|
|   |                        |                     |  |          |                  |
| Approval  | Standard               | Certificate Name    | Approval   | Standard | Certificate Name |
| EAC<br>GZO Almaty Standart  | TP TC 020/2011         | EAC CoC 03083       | EU-Declaration of Confor-<br>mity<br>WAGO GmbH & Co. KG    | -        | -                |
| KC<br>National Radio Research<br>Agency                           | Article 58-2, Clause 3 | MSIP-REM-W43-AIM750 | UK-Declaration of Confor-<br>mity<br>WAGO GmbH & Co. KG    | -        | -                |
| UL<br>Underwriters Laboratories<br>Inc. (ORDINARY LOCATI-<br>ONS) | UL 508                 | E175199             |  |          |                  |

| Approvals for marine applications                               |          |                  |
|---|----------|------------------|
|   |          |                  |
| Approval  | Standard | Certificate Name |
| ABS<br>American Bureau of Ship-<br>ping                         | -        | 22-2219060       |
| BSH<br>Bundesamt fuer See-<br>schifffahrt und Hydrogra-<br>phie | -        | 1104             |

| Approvals for marine applications      |                      |                   |
|--|----------------------|-------------------|
| BV<br>Bureau Veritas S.A.              | -                    | 13453/E0 BV       |
| DNV<br>DNV GL SE                       | DNV-CG-0339,Aug.2021 | TAA0000194        |
| KR<br>Korean Register of Ship-<br>ping | -                    | KR HMB05880-AC001 |
| LR<br>Lloyds Register EMEA             | -                    | LR22180952TA      |
| PRS<br>Polski Rejestr Statków          | -                    | TE/1101/880590/23 |
| RINA<br>RINA Germany GmbH              | -                    | ELE343521XG001    |

Approvals for hazardous areas



| Approval   | Standard    | Certificate Name                           |
|--|-------------|--|
| ATEX<br>TUEV Nord Cert GmbH                                | EN 60079-0  | TUEV14ATEX148929X (II 3 G Ex ec IIC T4 Gc) |
| CCCEX<br>CQST/CNEX   | CNCA-C23-01 | 2020312310000213 (Ex ec IIC T4 Gc)         |
| IECEX<br>TUEV Nord Cert GmbH                               | IEC 60079-0 | IECEX TUN 14.0035 X (Ex ec IIC T4 Gc)      |
| INMETRO<br>TÜV Rheinland do Brasil Ltda.                   | IEC 60079-0 | TÜV 12.1297 X                              |
| UKEx<br>WAGO GmbH & Co. KG                                 | EN 60079-0  | UKCA_WA<br>GO22UKEX003X_ec                 |
| UL<br>Underwriters Laboratories Inc. (HAZARDOUS LOCATIONS) | UL 121201   | E198726                                    |

Downloads

Environmental Product Compliance

| Compliance Search  |
|--|
| Environmental Product Compliance 750-468 <a href="#">↓</a> |

Documentation

| Manual  |         |                   |                   |
|---|---------|-------------------|-------------------|
| Product Manual 4-channel, 0-10VDC, single-ended | V 1.3.0 | pdf<br>1985.37 KB | <a href="#">↓</a> |
| System Manual Series 750/753                    |         |                   | <a href="#">↓</a> |

| System Description                                      |  |                  |                   |
|---|--|------------------|-------------------|
| 750/753 Series I/O-System – General Product Information |  | pdf<br>953.35 KB | <a href="#">↓</a> |
| Overview on WAGO-I/O-SYSTEM 750 approvals               |  | pdf<br>770.48 KB | <a href="#">↓</a> |

| Bid Text                |            |                 |                   |
|-------------------------|------------|-----------------|-------------------|
| 750-468                 | 19.02.2019 | xml<br>4.24 KB  | <a href="#">↓</a> |
| 750-468                 | 19.10.2017 | doc<br>27.50 KB | <a href="#">↓</a> |
| ausschreiben.de 750-468 |            |                 | <a href="#">↓</a> |

| Instruction Leaflet             |            |                  |                   |
|---------------------------------|------------|------------------|-------------------|
| CCC Ex (Additional information) | 26.04.2023 | pdf<br>159.76 KB | <a href="#">↓</a> |

## CAD/CAE-Data

| CAD data             |  | CAE data                  |  |
|----------------------|--|---------------------------|--|
| 2D/3D Models 750-468 |  | EPLAN Data Portal 750-468 |  |
|                      |  | WSCAD Universe 750-468    |  |
|                      |  | ZUKEN Portal 750-468      |  |

## Device Files

| Device Driver                                      |                       |                   |  |
|--|-----------------------|-------------------|--|
| WAGO USB Service Kabel Treiber / Serie 750 und 857 | 6.5.3.0<br>10.09.2014 | zip<br>4721.96 KB |  |

## 1 Compatible Products

### 1.1 Optional Accessories

#### 1.1.1 DIN-rail

##### 1.1.1.1 Mounting accessories



**Item No.: 210-196**  
Aluminum carrier rail; 35 x 8.2 mm; 1.6 mm thick; 2 m long; unslotted; similar to EN 60715; silver-colored



**Item No.: 210-198**  
Copper carrier rail; 35 x 15 mm; 2.3 mm thick; 2 m long; unslotted; according to EN 60715; copper-colored



**Item No.: 210-508**  
Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; slotted; galvanized; similar to EN 60715; silver-colored



**Item No.: 210-197**  
Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; slotted; similar to EN 60715; silver-colored



**Item No.: 210-506**  
Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; unslotted; galvanized; similar to EN 60715; silver-colored



**Item No.: 210-114**  
Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; unslotted; similar to EN 60715; silver-colored



**Item No.: 210-118**  
Steel carrier rail; 35 x 15 mm; 2.3 mm thick; 2 m long; unslotted; according to EN 60715; silver-colored



**Item No.: 210-115**  
Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; slotted; according to EN 60715; "Hole width 18 mm; silver-colored



**Item No.: 210-112**  
Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; slotted; according to EN 60715; "Hole width 25 mm; silver-colored



**Item No.: 210-504**  
Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; slotted; galvanized; according to EN 60715; silver-colored



**Item No.: 210-113**  
Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; unslotted; according to EN 60715; silver-colored



**Item No.: 210-505**  
Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; unslotted; galvanized; according to EN 60715; silver-colored

### 1.1.2 Marking

#### 1.1.2.1 Group marker carrier



**Item No.: 750-106**  
Group marker carrier

1.1.2.2 Marker

|   |  |   |  |
|---|--|---|--|
|  <p><b>Item No.: 750-100</b><br/>Marker card; as a DIN A4 sheet; plain</p>   | <p><b>Item No.: 2009-145/000-006</b><br/>Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; blue</p>  | <p><b>Item No.: 2009-145/000-007</b><br/>Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; gray</p>   | <p><b>Item No.: 2009-145/000-023</b><br/>Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; green</p>   |
| <p><b>Item No.: 2009-145/000-012</b><br/>Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; orange</p>   | <p><b>Item No.: 2009-145/000-005</b><br/>Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; red</p>   | <p><b>Item No.: 2009-145/000-024</b><br/>Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; violet</p>   | <p><b>Item No.: 2009-145</b><br/>Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; white</p>   |
| <p><b>Item No.: 2009-145/000-002</b><br/>Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; yellow</p>   |  <p><b>Item No.: 248-501/000-006</b><br/>Mini-WSB marking card; as card; not stretchable; plain; snap-on type; blue</p>   |  <p><b>Item No.: 248-501/000-007</b><br/>Mini-WSB marking card; as card; not stretchable; plain; snap-on type; gray</p> |  <p><b>Item No.: 248-501/000-023</b><br/>Mini-WSB marking card; as card; not stretchable; plain; snap-on type; green</p>  |
|  <p><b>Item No.: 248-501/000-017</b><br/>Mini-WSB marking card; as card; not stretchable; plain; snap-on type; light green</p> |  <p><b>Item No.: 248-501/000-012</b><br/>Mini-WSB marking card; as card; not stretchable; plain; snap-on type; orange</p> |  <p><b>Item No.: 248-501/000-005</b><br/>Mini-WSB marking card; as card; not stretchable; plain; snap-on type; red</p>  |  <p><b>Item No.: 248-501/000-024</b><br/>Mini-WSB marking card; as card; not stretchable; plain; snap-on type; violet</p> |
|  <p><b>Item No.: 248-501</b><br/>Mini-WSB marking card; as card; not stretchable; plain; snap-on type; white</p>               |  <p><b>Item No.: 248-501/000-002</b><br/>Mini-WSB marking card; as card; not stretchable; plain; snap-on type; yellow</p> |   |  |

1.1.2.3 Marker carrier

|  |
|--|
|  <p><b>Item No.: 750-103</b><br/>Group marker carrier</p> |
|--|

1.1.3 Shield termination

1.1.3.1 Shield clamping saddles

|   |  |   |   |
|---|--|---|---|
|  <p><b>Item No.: 790-108</b><br/>Shield clamping saddle; 11 mm wide; diameter of compatible conductor; 3 ... 8 mm</p>  |  <p><b>Item No.: 790-208</b><br/>Shield clamping saddle; 12.4 mm wide; 3 ... 8 mm</p> |  <p><b>Item No.: 790-116</b><br/>Shield clamping saddle; 19 mm wide; diameter of compatible conductor; 7 ... 16 mm</p> |  <p><b>Item No.: 790-216</b><br/>Shield clamping saddle; 21.8 mm wide; 6 ... 16 mm</p> |
|  <p><b>Item No.: 790-124</b><br/>Shield clamping saddle; 27 mm wide; diameter of compatible conductor; 6 ... 24 mm</p> |  <p><b>Item No.: 790-220</b><br/>Shield clamping saddle; 30 mm wide; 6 ... 20 mm</p>  |  <p><b>Item No.: 790-140</b><br/>Shield clamping saddle; diameter of compatible conductor</p>                          |   |

## 1.1.4 System enclosure

## 1.1.4.1 System enclosure

**Item No.: 850-825**

IP65 enclosure; Aluminium (RAL 7032);  
WxHxD (160x100x160 mm); 9 x M12, 4 x  
M20

**Item No.: 850-826**

IP65 enclosure; Aluminium (RAL 7032);  
WxHxD (240x100x160 mm); 4 x M20, 4 x  
M16, 14 x M12 cable grip

**Item No.: 850-827**

IP65 enclosure; Aluminium (RAL 7032);  
WxHxD (320x100x160 mm); 4 x M20, 8 x  
M16, 17 x M12 cable grip

**Item No.: 850-828**

IP65 enclosure; Aluminium (RAL 7032);  
WxHxD (480x100x160 mm); 4 x M20, 10 x  
M16, 35 x M12 cable grip

**Item No.: 850-826/002-000**

IP65 enclosure; Aluminium (RAL 7035);  
WxHxD (240x100x160 mm); 4 x M20, 4 x  
M16, 14 x M12 cable grip

**Item No.: 850-827/002-000**

IP65 enclosure; Aluminium (RAL 7035);  
WxHxD (320x100x160 mm); 4 x M20, 8 x  
M16, 17 x M12 cable grip

**Item No.: 850-828/002-000**

IP65 enclosure; Aluminium (RAL 7035);  
WxHxD (480x100x160 mm); 4 x M20, 10 x  
M16, 35 x M12 cable grip

**Item No.: 850-834**

IP65 enclosure; Polyester (RAL 7032); Wx-  
HxD (164x100x164 mm); 9 x M12, 4 x M20

**Item No.: 850-835**

IP65 enclosure; Polyester (RAL 7032); Wx-  
HxD (244x100x164 mm); 4 x M20, 4 x  
M16, 14 x M12 cable grip

**Item No.: 850-836**

IP65 enclosure; Polyester (RAL 7032);  
WxHxD (324x100x164 mm); 4 x M20, 8 x  
M16, 17 x M12 cable grip

**Item No.: 850-814/002-000**

IP65 enclosure; Sheet steel (RAL 7035);  
WxHxD (200x120x200 mm); without flan-  
ge plate

**Item No.: 850-815/002-000**

IP65 enclosure; Sheet steel (RAL 7035);  
WxHxD (300x120x200 mm); without flan-  
ge plate

**Item No.: 850-816/002-000**

IP65 enclosure; Sheet steel (RAL 7035);  
WxHxD (400x120x200 mm); without flan-  
ge plate

**Item No.: 850-817/002-000**

IP65 enclosure; Sheet steel (RAL 7035);  
WxHxD (600x120x200 mm); without flan-  
ge plate