



SERIES: CP120 | **DESCRIPTION:** PELTIER MODULE

FEATURES

- arcTEC™ structure
- enhanced reliability for high thermal cycling
- superior thermal performance
- silicon sealed
- wide ΔT max
- precise temperature control
- solid state construction



MODEL

| | input voltage ¹ | input current ² | internal resistance ³ | output Qmax ⁴ | | output ΔT max ⁵ | |
|-------------|----------------------------|----------------------------|----------------------------------|--------------------------|--------------------------|------------------------------------|---------------------------|
| | max [Vdc] | max [A] | typ [$\Omega \pm 10\%$] | T _n =27°C [W] | T _n =50°C [W] | T _h =27°C [°C] | T _h =50°C [°C] |
| CP124159365 | 17 | 12 | 1.1 | 121 | 135 | 68 | 75 |


- Notes:
1. Maximum voltage at ΔT max and T_n=27°C
 2. Maximum current to achieve ΔT max
 3. Measured by AC 4-terminal method at 25°C
 4. Maximum heat absorbed at cold side occurs at I_{max}, V_{max}, and $\Delta T=0^\circ\text{C}$
 5. Maximum temperature difference occurs at I_{max}, V_{max}, and Q=0W (ΔT max measured in a vacuum at 1.3 Pa)

SPECIFICATIONS



| parameter | conditions/description | min | typ | max | units |
|----------------------------|-----------------------------------------|-----|-----|-----|-------|
| solder melting temperature | connection between thermoelectric pairs | 235 | | | °C |
| assembly compression | | | | 1 | MPa |
| RoHS | yes | | | | |

MECHANICAL DRAWING

units: mm

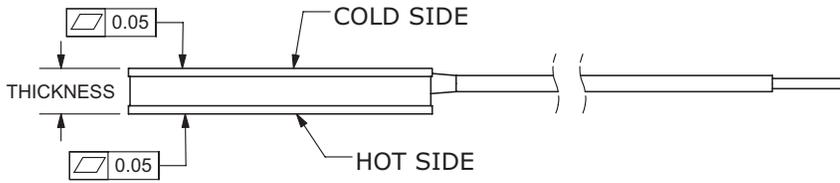


| | MATERIAL | PLATING |
|---------------|-----------------------------------------------------------|---------|
| ceramic plate | 96% Al_2O_3 | |
| wire leads | 18 AWG | tin |
| sealer | silicon rubber 703 RTV [between cold and hot side plates] | |
| joint cover | silicon rubber 703 RTV | |
| marking | P/N & S/N printed on cold side surface | |

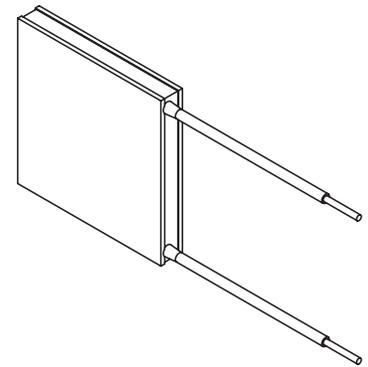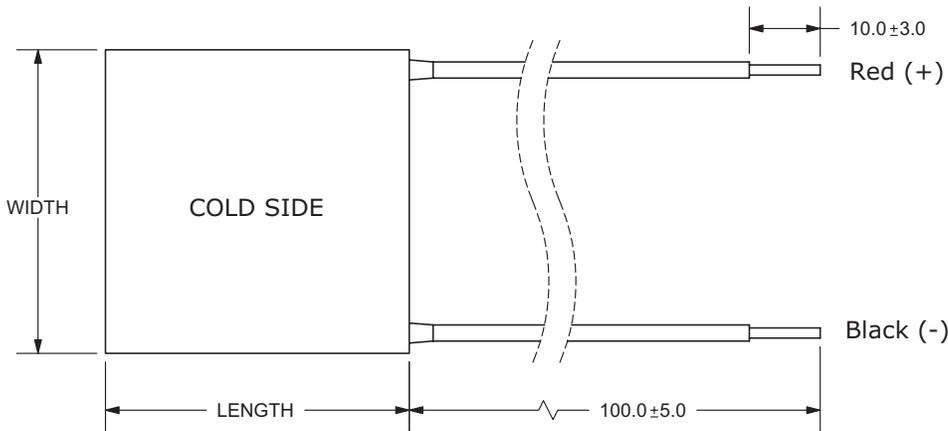


| MODEL NO. | LENGTH (mm) | WIDTH (mm) | THICKNESS (mm) |
|-------------|-------------|------------|----------------|
| CP124159365 | 41.5 ±0.3 | 59 ±0.3 | 3.65 ±0.1 |

CP124159365 PERFORMANCE (Th=27°C)

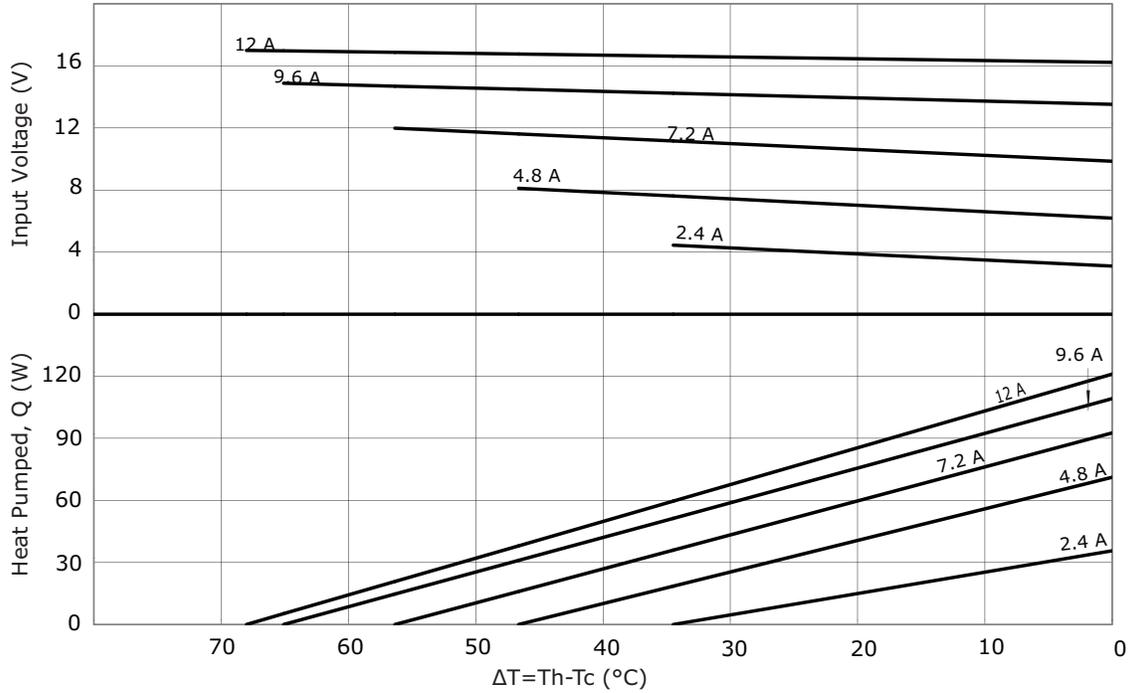

CP124159365 PERFORMANCE (Th=50°C)

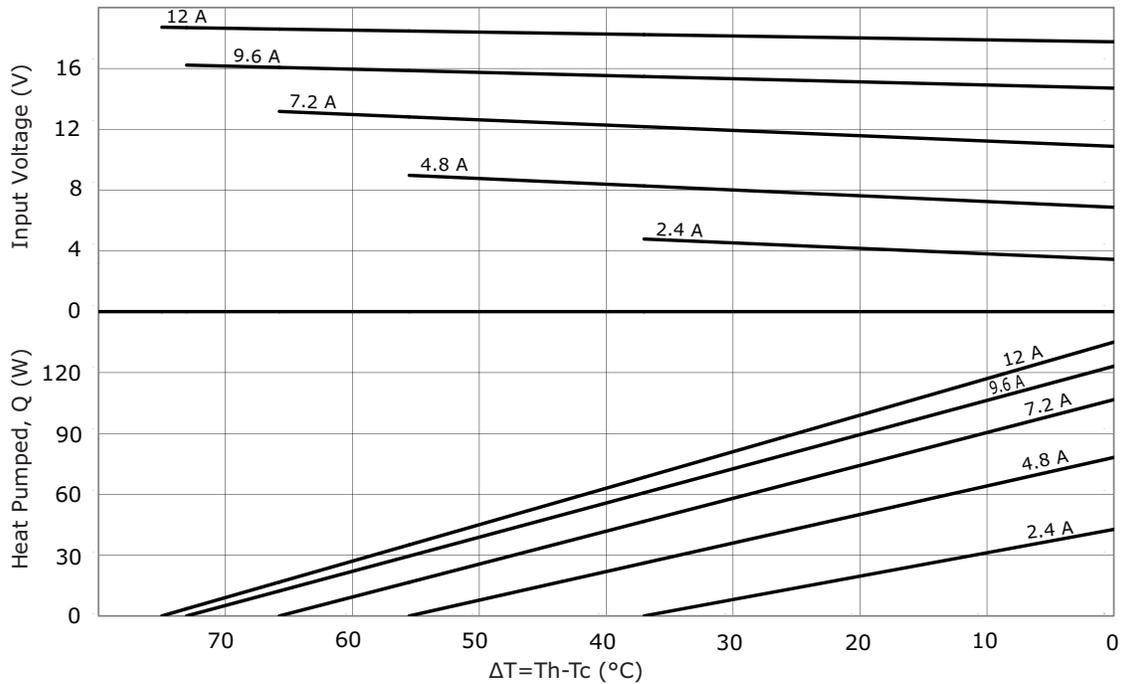

REVISION HISTORY

| rev. | description | date |
|------|-----------------------------------|------------|
| 1.0 | initial release | 10/22/2019 |
| 1.01 | logo, datasheet style update | 08/05/2022 |
| 1.02 | CUI Devices rebranded to Same Sky | 09/12/2024 |
| 1.03 | updated datasheet | 06/16/2025 |

The revision history provided is for informational purposes only and is believed to be accurate.



Same Sky offers a one (1) year limited warranty. Complete warranty information is listed on our website.

Same Sky reserves the right to make changes to the product at any time without notice. Information provided by Same Sky is believed to be accurate and reliable. However, no responsibility is assumed by Same Sky for its use, nor for any infringements of patents or other rights of third parties which may result from its use.

Same Sky products are not authorized or warranted for use as critical components in equipment that requires an extremely high level of reliability. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

[sameskydevices.com](https://www.sameskydevices.com)