

## High Flow Fume Extractor, 3 Filter Stages, Low Noise (<55dB), 2 Suction Hoses

### Description


High Flow Fume Extractor, 3 Filter Stages, Low Noise (<55dB), 2 suction hoses. Can be used with just 1 or 2 of the included suction hoses. Comes with suction port cover to block unused suction port when used with only 1 suction hose.

### Specifications

Voltage: 100-120 VAC  
 Frequency: 60Hz  
 Rated Output Power: 0.32 KW  
 Fuse: T3.15A  
 Air Flow: 350 Cubic Meters Per Hour (206 CFM (Cubic Feet Per Minute))  
 Noise Level: <55dB  
 Hose Length: 2 fume extraction hoses, 7 feet (2134mm) long each  
 Hose Interior Diameter (ID): 2.95 inches (75mm)  
 Hose Exterior Diameter (OD): 3.25 inches (82.6mm)  
 Hose Wall Thickness: 0.15 inches (3.8mm)  
 Case Dimensions (LxWxH): 31 x 31 x 46 cm (12-1/4" x 12-1/4" x 18-1/8")  
 Weight: 20 kg (44 lbs)

### Parts Included

CQ-FE-2	Pre-Filter	Carbon Filter
Two Suction Hoses	HEPA Filter	Power Cord

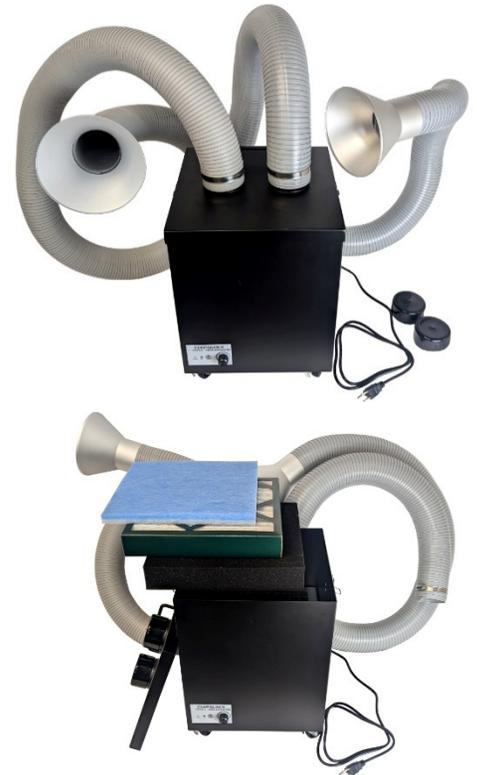

### Orderable Part Numbers

Part Number	Description
CQ-FE-2	High Flow Fume Extractor, 3 Filter Stages, Low Noise (<55dB), 2 Suction Hoses
CQ-FE-2-P3	Pre-Filters (3 Pack) for High Flow Fume Extractor
CQ-FE-2-PHC	Replacement Filter Set (3 Filter Stages) for High Flow Fume Extractor

### Product Images of Orderable Part Numbers:



CQ-FE-2



CQ-FE-2-P3



CQ-FE-2-PHC