


110 ± 10MM



6.65 ± 0.2mm

④⑤⑥⑦⑧

①


⑧③②



P2

**ELECTRICAL TEST:**

- 1.100% OPEN & SHORT & MIS WIRE TEST
  - 2.CONTACT RESISTANCE:2 OHM(MAX)
  - 3.INSULATION RESISTANCE:10M OHM(MIN)
  - 4.HI-POT TEST:DC 300V/10ms
- Supported Maximum Resolution 4K/30HZ  
Supported PD100W

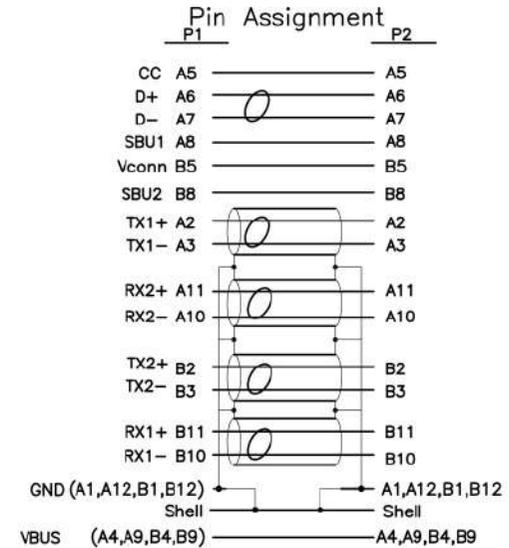

NO	DESCRIPTION	Q'TY	UNIT
8	45P PVC Color:White	10	g
7	Transparent PE	2	g
6	USB3.1 TYPE C Tinplate Shell Nickel Plated	1	pcs
5	USB3.1 TYPE C ABS Shell Color:White	1	pcs
4	USB3.1 C Type Connector With PCB Shell Nickel Plated	1	pcs
3	UTC-CUFH05 ABS Shell Color:White	1	pcs
2	UTC-CUFH05 With PCB	1	pcs
1	USB3.1 [34AWG(7/0.06TC)+EAM]*4P+34AWG(7/0.06TC)*2C+28AWG(7/0.127TC)*2C+34AWG(7/0.06TC)*4C+AB(16/9/0.06 75%TC)OD3.9MM Color:White	0.16	m

TOLERANCE	INCHES		M/M	
	.X	.015	.30	
	.XX	.010	.10	
	.XXX	.005	.05	

**CompuCableUSA**

TITLE: USB 3.1 Type-C to USB 3.0+HDMI(4Kx2K @30HZ)+Type-C 3.1(data+power) Adapt~34AWG

DRAWN BY	Hong	Part#	UC3-CMFA1
CHECK BY		SCALE	NONE
APPD BY		UNIT	MM
		DATE	2023.07.31
		DRAWING NO.:	REV. AO
			1/1