

PSI-MOS-RS422/FO1300 E - FO converters



2708575

<https://www.phoenixcontact.com/us/products/2708575>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Fiber optic converter with integrated optical diagnostics, alarm contact, for RS-422/RS-485 4 wire/ INTERBUS up to 2 Mbps, termination device with one fiber optic interface (SC duplex), 1300 nm, for fiberglass cable

Your advantages

- Connections can be plugged in via a COMBICON screw terminal block
- Supply voltage routed through via DIN rail connectors
- Redundant power supply possible by means of optional system power supply unit
- High-quality electrical isolation between all interfaces (INTERBUS // FO ports // supply // DIN rail connector)
- Approved for use in zone 2
- Floating switch contact for advance warning of critical FO paths
- Integrated optical diagnostics for continuous monitoring of FO paths
- Automatic data rate detection for all data rates up to 2 Mbps
- Shipbuilding approval in accordance with DNV GL

Commercial data

| | |
|--------------------------------------|---------------|
| Item number | 2708575 |
| Packing unit | 1 pc |
| Minimum order quantity | 1 pc |
| Sales key | DN06 |
| Product key | DNC216 |
| GTIN | 4046356176293 |
| Weight per piece (including packing) | 253.633 g |
| Weight per piece (excluding packing) | 190.68 g |
| Customs tariff number | 85176200 |
| Country of origin | DE |

Technical data

Notes

Note on application

| | |
|---------------------|-------------------------|
| Note on application | Only for industrial use |
|---------------------|-------------------------|

Utilization restriction

| | |
|------------|---|
| CCCex note | Use in potentially explosive areas is not permitted in China. |
|------------|---|

Product properties

| | |
|----------------|--|
| Product type | Media converter |
| Product family | PSI-MOS |
| MTTF | 891 Years (SN 29500 standard, temperature 25°C, operating cycle 21%) |
| | 397 Years (SN 29500 standard, temperature 40°C, operating cycle 34.25%) |
| | 164 Years (SN 29500 standard, temperature 40°C, operating cycle 100%) |
| MTBF | 544 Years (Telcordia standard, 25°C temperature, 21% operating cycle (5 days a week, 8 hours a day)) |
| | 113 Years (Telcordia standard, 40°C temperature, 34.25% operating cycle (5 days a week, 12 hours a day)) |

Electrical properties

| | |
|---|---------------------------------------|
| Electrical isolation | VCC // RS-422 |
| Maximum power dissipation for nominal condition | 2.75 W |
| Test voltage data interface/power supply | 1.5 kV _{rms} (50 Hz, 1 min.) |

Supply

| | |
|-----------------------------|--|
| Supply voltage range | 18 V DC ... 32 V DC |
| Nominal supply voltage | 24 V DC |
| Typical current consumption | 110 mA (24 V DC) |
| Max. current consumption | ≤ 2 A (For operation in a joining station, via the DIN rail connector) |

Output data

Switching

| | |
|-----------------------------|--------------|
| Output name | Relay output |
| Output description | Alarm output |
| Number of outputs | 1 |
| Maximum switching voltage | 60 V DC |
| | 42 V AC |
| Limiting continuous current | 1 A |

Connection data

PSI-MOS-RS422/FO1300 E - FO converters



2708575

<https://www.phoenixcontact.com/us/products/2708575>

Supply

| | |
|-------------------|---------------------------------------|
| Connection method | COMBICON plug-in screw terminal block |
| Tightening torque | 0.56 Nm ... 0.79 Nm |

Interfaces

| | |
|------------------------|-----------------------------|
| Bit distortion, input | ± 35 % (permitted) |
| Bit distortion, output | < 6.25 % |
| Signal | INTERBUS |
| Transmission channels | 2 (1/1) RD, TD, full duplex |

Data: optical FO

| | |
|---|--|
| No. of channels | 1 |
| Transmit capacity, minimum | -3.4 dBm (50/125 µm, multimode fiberglass) |
| | -4.7 dBm (62.5/125 µm, multimode fiberglass) |
| | -5.5 dBm (9/125 µm, singlemode fiberglass) |
| Transmission length incl. 3 dB system reserve | 27 km (With F-G 50/125 0.7 dB/km at 1300 nm) |
| | 22 km (with F-G 62.5/125 0.8 dB/km at 1300 nm) |
| | 45 km (With F-E 9/125 0,4 dB/km at 1300 nm) |
| Transmission protocol | Transparent to protocol for RS-422 interface |
| Connection method | SC duplex |
| Wavelength | 1300 nm |
| Minimum receiver sensitivity | -25.5 dBm (50/125 µm) |
| | -25.5 dBm (62,5/125 µm) |
| | -26.5 dBm (9/125 µm) |
| Maximum receiver sensitivity | 0 dBm |
| Transmission medium | Multi-mode fiberglass |
| | Single-mode fiberglass |

Data: RS-422 interface in acc. with ITU-T V.11, EIA/TIA-422, DIN 66348-1

| | |
|--|--|
| Serial transmission speed | ≤ 2 Mbps |
| Connection method | Pluggable screw connection |
| Tightening torque | 0.56 Nm ... 0.79 Nm |
| Transmission length | ≤ 1000 m (depending on the data rate, with shielded, twisted data cable) |
| Termination resistor | 220 Ω |
| | 100 Ω |
| | 220 Ω |
| Single conductor/terminal point, rigid | 0.2 mm ² ... 2.5 mm ² |
| Single-wire/terminal point, flexible | 0.2 mm ² ... 2.5 mm ² |
| Max. AWG conductor cross-section, flexible | 14 |
| Min. AWG conductor cross-section, flexible | 24 |
| Single-wire/terminal point, rigid AWG max. | 14 |
| Single-wire/terminal point, rigid AWG min. | 24 |
| Stripping length | 7 mm |
| Transmission medium | Copper |

PSI-MOS-RS422/FO1300 E - FO converters




2708575

<https://www.phoenixcontact.com/us/products/2708575>

| | |
|--------------------|--------------------|
| File format/coding | UART (11 Bit, NRZ) |
|--------------------|--------------------|

Dimensions
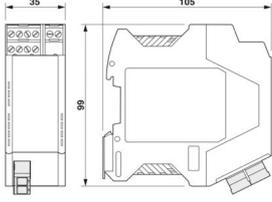
| | |
|---------------------|--|
| Dimensional drawing |  |
| Width | 35 mm |
| Height | 105 mm |
| Depth | 103 mm |

Material specifications

| | |
|--------------------|------------------|
| Color (Housing) | green (RAL 6021) |
| Material (Housing) | PA 6.6-FR |

Cable/line

FO cable

| | |
|-------------|------------|
| Fiber types | 50/125 µm |
| | 9/125 µm |
| | Fiberglass |

Mechanical tests

| | |
|--|---|
| Vibration resistance in accordance with EN 60068-2-6/IEC 60068-2-6 | Vibration (operation): 5g, 10...150 Hz, 2.5 h, in XYZ direction |
| Shock in accordance with EN 60068-2-27/IEC 60068-2-27 | Shock (operation): 15g, 11 ms period, half-sine shock pulse |

Environmental and real-life conditions

Ambient conditions

| | |
|---|--|
| Degree of protection | IP20 |
| Ambient temperature (operation) | -20 °C ... 60 °C |
| Ambient temperature (storage/transport) | -40 °C ... 85 °C |
| Altitude | ≤ 5000 m (For restrictions, see the manufacturer's declaration for altitude operation) |
| Permissible humidity (operation) | 30 % ... 95 % (non-condensing) |

Approvals

CE

| | |
|-------------|--------------|
| Certificate | CE-compliant |
|-------------|--------------|

ATEX

| | |
|----------------|-----------------------------|
| Identification | Ⓔ II 3 G Ex ec nC IIC T4 Gc |
| Certificate | PxCIF07ATEX2708559X |

PSI-MOS-RS422/FO1300 E - FO converters



2708575

<https://www.phoenixcontact.com/us/products/2708575>

| | |
|------|---|
| Note | Please follow the special installation instructions in the documentation! |
|------|---|

UL, USA/Canada

| | |
|----------------|----------------|
| Identification | 508 Listed |
| | 508 Recognized |

KC approval for South Korea

| | |
|-------------|----------------------|
| Certificate | MSIP-REI-PCK-2708575 |
|-------------|----------------------|

Corrosive gas test

| | |
|----------------|----------------------------------|
| Identification | ISA-S71.04-1985 G3 Harsh Group A |
|----------------|----------------------------------|

Shipbuilding

| | |
|----------------|--------|
| Identification | DNV GL |
|----------------|--------|

Shipbuilding data

| | |
|-------------|---|
| Temperature | B |
| Humidity | A |
| Vibration | A |
| EMC | B |
| Enclosure | Required protection according to the Rules shall be provided upon installation on board |

EMC data

| | |
|-------------------------------|---|
| Electromagnetic compatibility | Conformance with EMC Directive 2014/30/EU |
| Noise immunity | EN 61000-6-2:2005 |

Noise emission

| | |
|-----------------------|----------|
| Standards/regulations | EN 55011 |
|-----------------------|----------|

Electrostatic discharge

| | |
|-----------------------|--------------|
| Standards/regulations | EN 61000-4-2 |
|-----------------------|--------------|

Electrostatic discharge

| | |
|-------------------|-------------|
| Contact discharge | ± 6 kV |
| Discharge in air | ± 8 kV |
| Comments | Criterion B |

Electromagnetic HF field

| | |
|-----------------------|--------------|
| Standards/regulations | EN 61000-4-3 |
|-----------------------|--------------|

Electromagnetic HF field

| | |
|-----------------|-------------|
| Field intensity | 10 V/m |
| Comments | Criterion A |

Fast transients (burst)

| | |
|-----------------------|--------------|
| Standards/regulations | EN 61000-4-4 |
|-----------------------|--------------|

Fast transients (burst)

PSI-MOS-RS422/FO1300 E - FO converters



2708575

<https://www.phoenixcontact.com/us/products/2708575>

| | |
|----------|-------------|
| Input | ± 2 kV |
| Signal | ± 2 kV |
| Comments | Criterion B |

Surge current load (surge)

| | |
|-----------------------|--------------|
| Standards/regulations | EN 61000-4-5 |
|-----------------------|--------------|

Surge current load (surge)

| | |
|----------|-------------|
| Input | ± 0.5 kV |
| Signal | ± 1 kV |
| Comments | Criterion B |

Conducted interference

| | |
|-----------------------|--------------|
| Standards/regulations | EN 61000-4-6 |
|-----------------------|--------------|

Conducted interference

| | |
|----------|-------------|
| Comments | Criterion A |
| Voltage | 10 V |

Emitted interference

| | |
|-----------------------|----------------------------------|
| Standards/regulations | EN 55011 |
| Comments | Class A, industrial applications |

Criteria

| | |
|-------------|--|
| Criterion A | Normal operating behavior within the specified limits. |
| Criterion B | Temporary impairment to operational behavior that is corrected by the device itself. |

Standards and regulations

| | |
|---|--------------------|
| Free from substances that could impair the application of coating | VDMA 24364:2018-05 |
|---|--------------------|

Mounting

| | |
|---------------|--|
| Mounting type | DIN rail mounting |
| Assembly note | The product can be snapped onto all 35 mm DIN rails in accordance with EN/IEC 60715. |

PSI-MOS-RS422/FO1300 E - FO converters




2708575

<https://www.phoenixcontact.com/us/products/2708575>


Drawings

Dimensional drawing

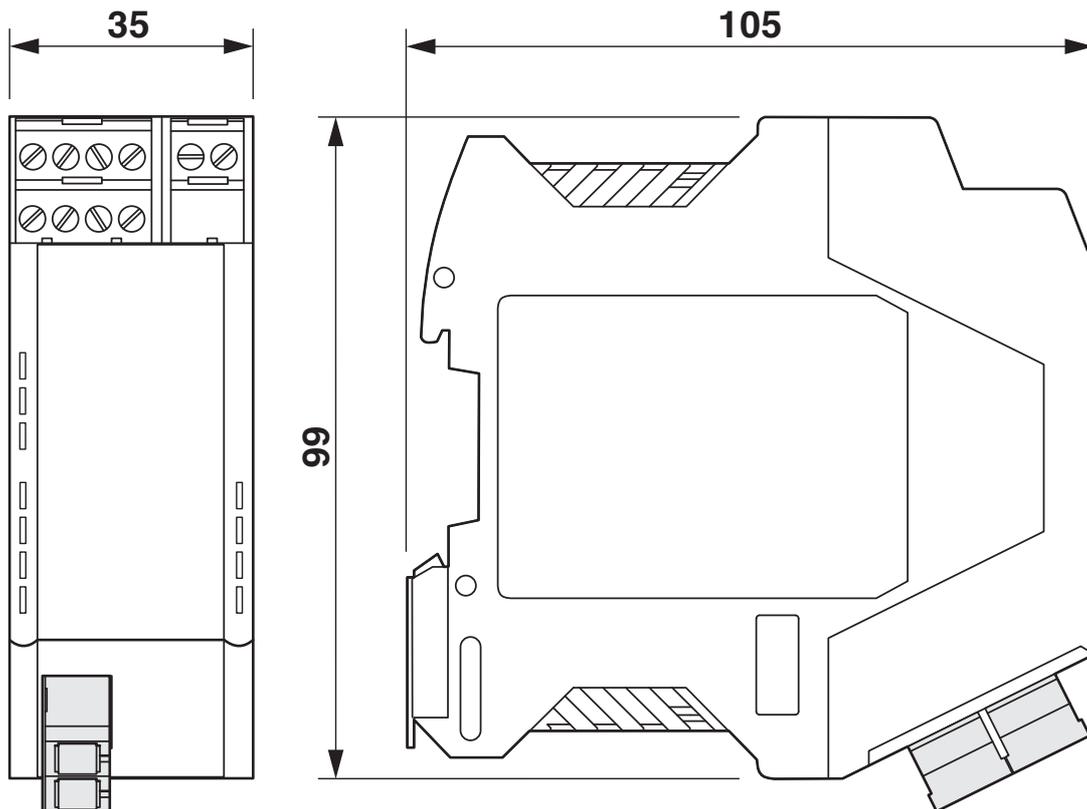

Housing dimensions

Application drawing

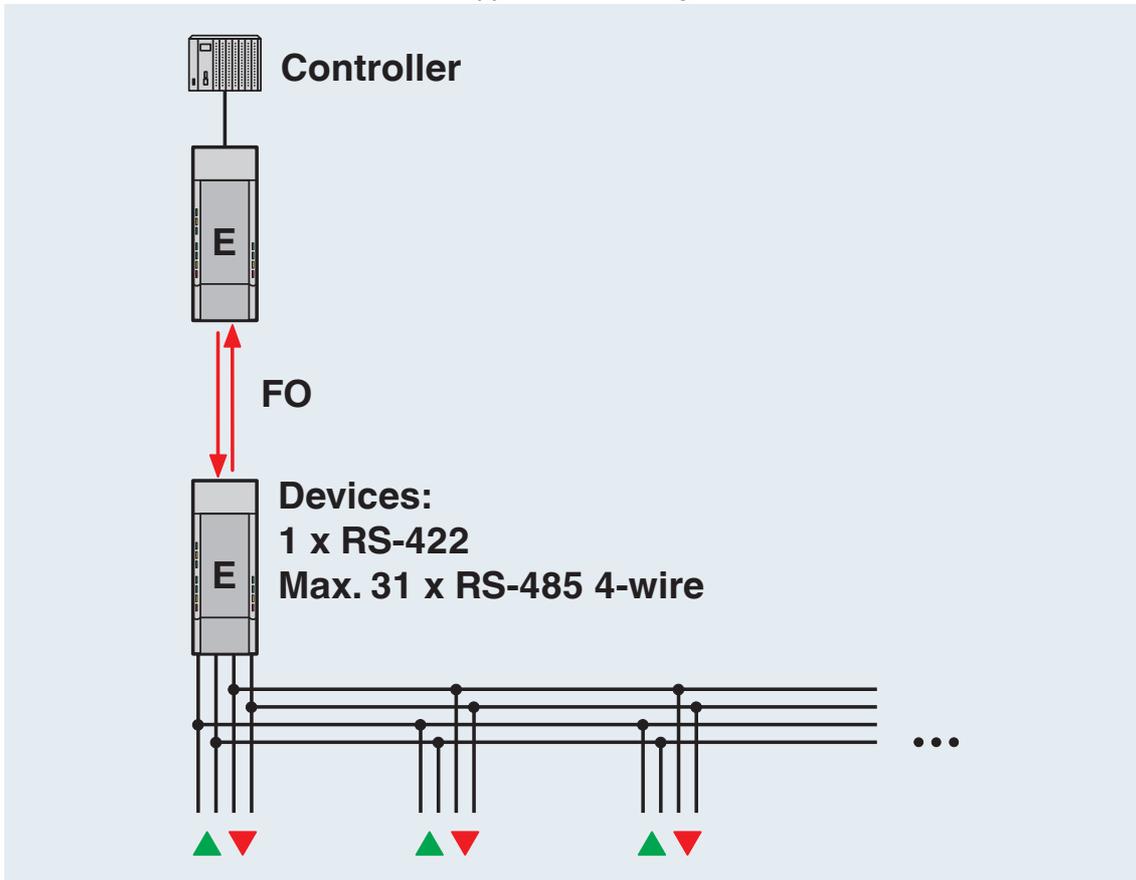

Point-to-point connection


PSI-MOS-RS422/FO1300 E - FO converters

2708575

<https://www.phoenixcontact.com/us/products/2708575>




Application drawing

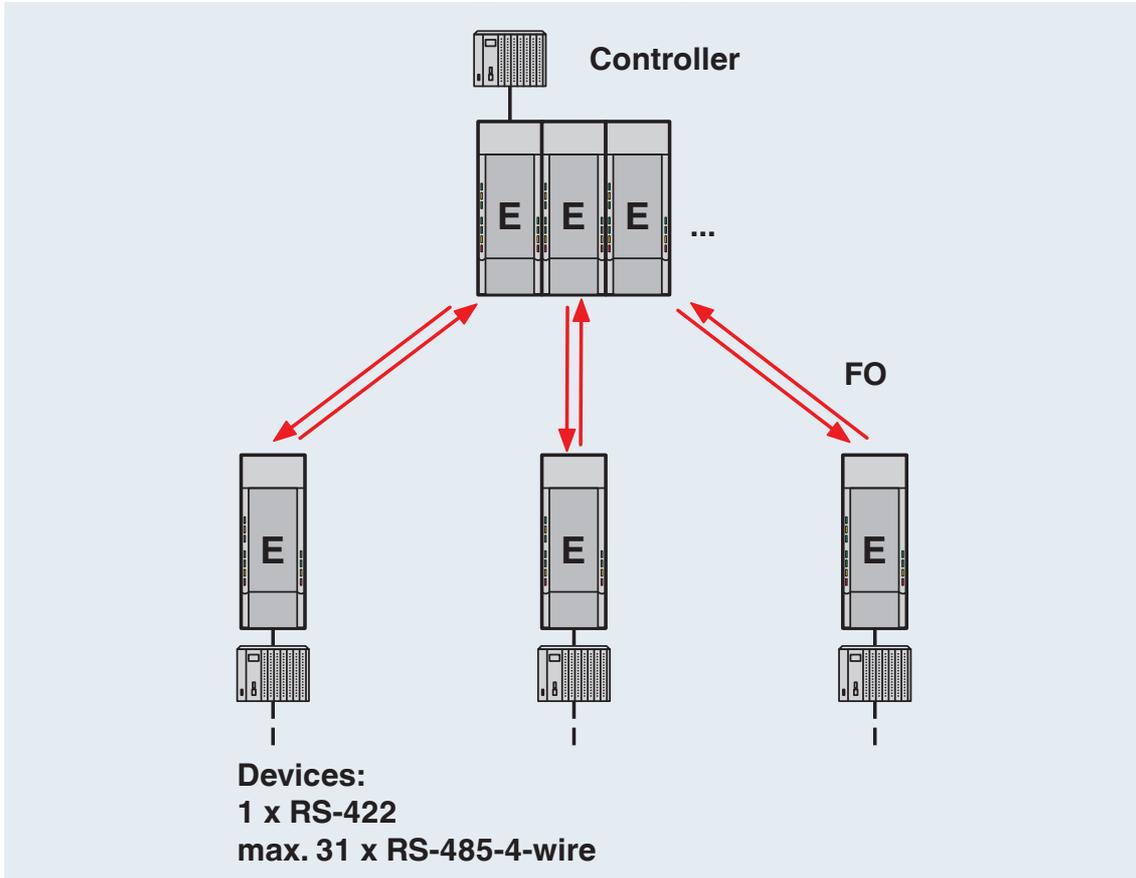

Star structure

Application drawing

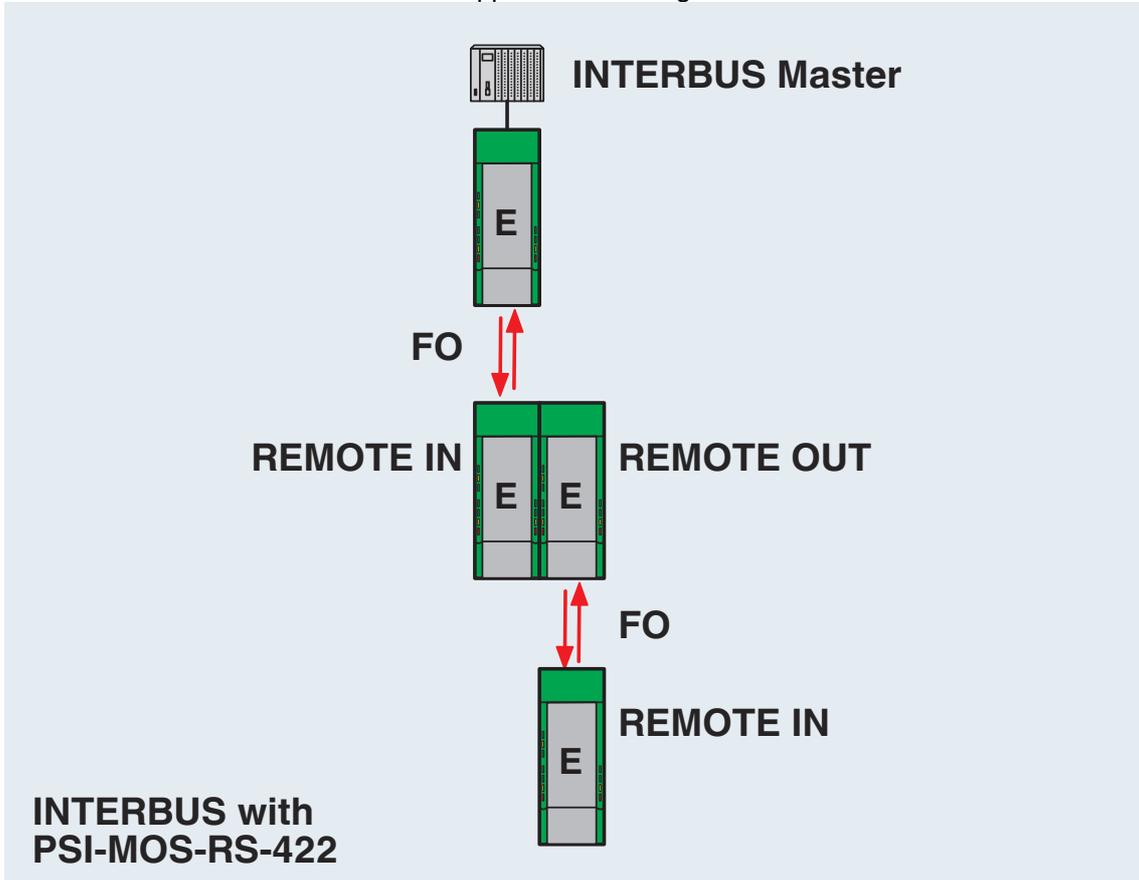

INTERBUS with PSI-MOS-RS422...

2708575

<https://www.phoenixcontact.com/us/products/2708575>

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/2708575>



DNV GL

Approval ID: TAA00001KR



KC

Approval ID: MSIP-REI-PCK-2708575



cULus Listed

Approval ID: E238705



cULus Recognized

Approval ID: E238705

PSI-MOS-RS422/FO1300 E - FO converters



2708575

<https://www.phoenixcontact.com/us/products/2708575>

Classifications

ECLASS

| | |
|-------------|----------|
| ECLASS-13.0 | 19170411 |
| ECLASS-15.0 | 19170411 |

ETIM

| | |
|----------|----------|
| ETIM 9.0 | EC001467 |
|----------|----------|

UNSPSC

| | |
|-------------|----------|
| UNSPSC 21.0 | 43201500 |
|-------------|----------|

2708575

<https://www.phoenixcontact.com/us/products/2708575>

Environmental product compliance

EU RoHS

| | |
|---|--------------|
| Fulfills EU RoHS substance requirements | Yes |
| Exemption | 7(a), 7(c)-I |

China RoHS

| | |
|--|---|
| Environment friendly use period (EFUP) | EFUP-50 |
| | An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required. |

EU REACH SVHC

| | |
|-------------------------------------|--------------------------------------|
| REACH candidate substance (CAS No.) | Lead(CAS: 7439-92-1) |
| SCIP | 6cee866a-b6da-473c-97f7-5b30cfc18f31 |

Phoenix Contact 2025 © - all rights reserved
<https://www.phoenixcontact.com>

Phoenix Contact USA
 586 Fulling Mill Road
 Middletown, PA 17057, United States
 (+717) 944-1300
info@phoenixcon.com