

# PSM-ME-RS232/RS232-P - Interface converter



2744461

<https://www.phoenixcontact.com/us/products/2744461>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.

Interface converter, for the isolation of RS-232 (V.24) interfaces, 4 channels, rail-mountable



## Product description

A considerably higher level of immunity to interference can be achieved in industrial applications by using V.24 (RS-232) isolator modules. The high-quality 3-way isolation results in an electrically isolated and interference-proof V.24 (RS-232) interface. This decoupling also protects the expensive terminal devices against damage.

## Your advantages

- Mounting on standard EN DIN rails
- High-quality 3-way isolation up to 2 kV (VCC // RS-232 // RS-232)
- In the case of variable cable lengths, the RS-232 connection on the field side can be established conveniently using plug-in screw terminal blocks
- Integrated surge protection with transient discharge to the DIN rail
- Transmission of TxD/RxD data channels and RTS/CTS control lines
- 24 V DC or AC power supply suitable for the control cabinet
- Active data transmission indicated by separate data indicators for the transmit and receive channels
- Maximum transmission speed of 115.2 kbps
- Shipbuilding approval in accordance with DNV GL

## Commercial data

Item number	2744461
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	DN11
Product key	DNC111
GTIN	4017918188795
Weight per piece (including packing)	184 g
Weight per piece (excluding packing)	123.18 g
Customs tariff number	85176200
Country of origin	DE

## Technical data

### Notes

#### Note on application

Note on application	Only for industrial use
---------------------	-------------------------

#### Utilization restriction

EMC note	EMC: class A product, see manufacturer's declaration in the download area
----------	---

#### Utilization restriction

CCCEX note	Use in potentially explosive areas is not permitted in China.
------------	---

### Product properties

Product type	Interface converter
Application	RS-232
MTBF	2263 Years (Telcordia standard, 25°C temperature, 21% operating cycle (5 days a week, 8 hours a day))
	438 Years (Telcordia standard, 40°C temperature, 34.25% operating cycle (5 days a week, 12 hours a day))

### Electrical properties

Electrical isolation	VCC // V.24 (RS-232) (A) // V.24 (RS-232) (B)
Maximum power dissipation for nominal condition	0.96 W
Test voltage data interface/power supply	2 kV <sub>rms</sub> (50 Hz, 1 min.)
	2 kV AC
Test voltage data interfaces	2 kV AC

#### Supply

Supply voltage range	19.2 V AC/DC ... 28.8 V AC/DC
Nominal supply voltage	24 V AC/DC ±20 %
Typical current consumption	40 mA (24 V DC)
Protective circuit	Surge protection; Suppressor diode

### Connection data

#### Supply

Tightening torque	0.56 Nm ... 0.79 Nm
-------------------	---------------------

### Interfaces

Bit distortion	< 5 %
Bit delay	< 3 μs
Signal	Modbus
Transmission channels	4 (2/2), RxD, TxD, RTS, CTS; full duplex

Data: V.24 (RS-232) interface in acc. with ITU-T V.28, EIA/TIA-232, DIN 66259-1

# PSM-ME-RS232/RS232-P - Interface converter



2744461

<https://www.phoenixcontact.com/us/products/2744461>

Serial transmission speed	115.2 kbps
Connection method	D-SUB 9 plug
Pin assignment	DTE/DCE switchover via switch
Transmission length	15 m (shielded twisted pair)
Single-wire/terminal point, flexible	0.2 mm <sup>2</sup> ... 2.5 mm <sup>2</sup>
Max. AWG conductor cross-section, flexible	13
Min. AWG conductor cross-section, flexible	24
Protocols supported	transparent protocol

Data: V.24 (RS-232) interface in acc. with ITU-T V.28, EIA/TIA-232, DIN 66259-1

Connection method	Pluggable screw connection
Transmission length	15 m (shielded twisted pair)
Single-wire/terminal point, flexible	0.2 mm <sup>2</sup> ... 2.5 mm <sup>2</sup>
Max. AWG conductor cross-section, flexible	13
Min. AWG conductor cross-section, flexible	24

## Dimensions

Dimensional drawing	
Width	22.5 mm
Height	99 mm
Depth	118.6 mm

## Material specifications

Color (Housing)	green (RAL 6021)
Material (Housing)	PA

## Environmental and real-life conditions

### Ambient conditions

Degree of protection	IP20
Ambient temperature (operation)	0 °C ... 55 °C
Ambient temperature (storage/transport)	-40 °C ... 85 °C
Altitude	≤ 5000 m (For restrictions, see the manufacturer's declaration for altitude operation)
Permissible humidity (operation)	10 % ... 95 % (non-condensing)

## Approvals

### CE

Certificate	CE-compliant
-------------	--------------

# PSM-ME-RS232/RS232-P - Interface converter



2744461

<https://www.phoenixcontact.com/us/products/2744461>

## UL, USA/Canada

Identification	508 Recognized
	Class I, Div. 2, Groups A, B, C, D
	Class I, Zone 2, AEx nA IIC T4
	Class I, Zone 2, Ex nA IIC T4 Gc X

## Corrosive gas test

Identification	ISA-S71.04-1985 G3 Harsh Group A
----------------	----------------------------------

## Shipbuilding

Identification	DNV GL
----------------	--------

## Shipbuilding data

Temperature	B
Humidity	A
Vibration	A
EMC	B
Enclosure	Required protection according to the Rules shall be provided upon installation on board

## EMC data

Electromagnetic compatibility	Conformance with EMC Directive 2014/30/EU
Noise immunity	EN 61000-6-2:2005

## Noise emission

Standards/regulations	EN 61000-6-3
-----------------------	--------------

## Electrostatic discharge

Standards/regulations	EN 61000-4-2
-----------------------	--------------

## Electrostatic discharge

Contact discharge	± 6 kV (Test Level 3)
Discharge in air	± 8 kV (Test Level 3)
Comments	Criterion B

## Electromagnetic HF field

Standards/regulations	EN 61000-4-3
-----------------------	--------------

## Electromagnetic HF field

Frequency range	Test Level 3
Field intensity	10 V/m
Comments	Criterion A

## Fast transients (burst)

Standards/regulations	EN 61000-4-4
-----------------------	--------------

## Fast transients (burst)

Input	± 4 kV (5 kHz)
-------	----------------

# PSM-ME-RS232/RS232-P - Interface converter



2744461

<https://www.phoenixcontact.com/us/products/2744461>

Signal	± 2 kV (5 kHz)
Comments	Criterion B

## Surge current load (surge)

Standards/regulations	EN 61000-4-5
-----------------------	--------------

## Surge current load (surge)

Input	± 0.5 kV (2 Ω)
Signal	± 2 kV (12 Ω)
Comments	Criterion B

## Conducted interference

Standards/regulations	EN 61000-4-6
-----------------------	--------------

## Conducted interference

Comments	Criterion A
Voltage	10 V

## Emitted interference

Standards/regulations	EN 55011
Comments	Class A, industrial applications

## Criteria

Criterion A	Normal operating behavior within the specified limits.
Criterion B	Temporary impairment to operational behavior that is corrected by the device itself.

## Mounting

Mounting type	DIN rail mounting
---------------	-------------------

# PSM-ME-RS232/RS232-P - Interface converter


2744461

<https://www.phoenixcontact.com/us/products/2744461>



## Drawings

Dimensional drawing

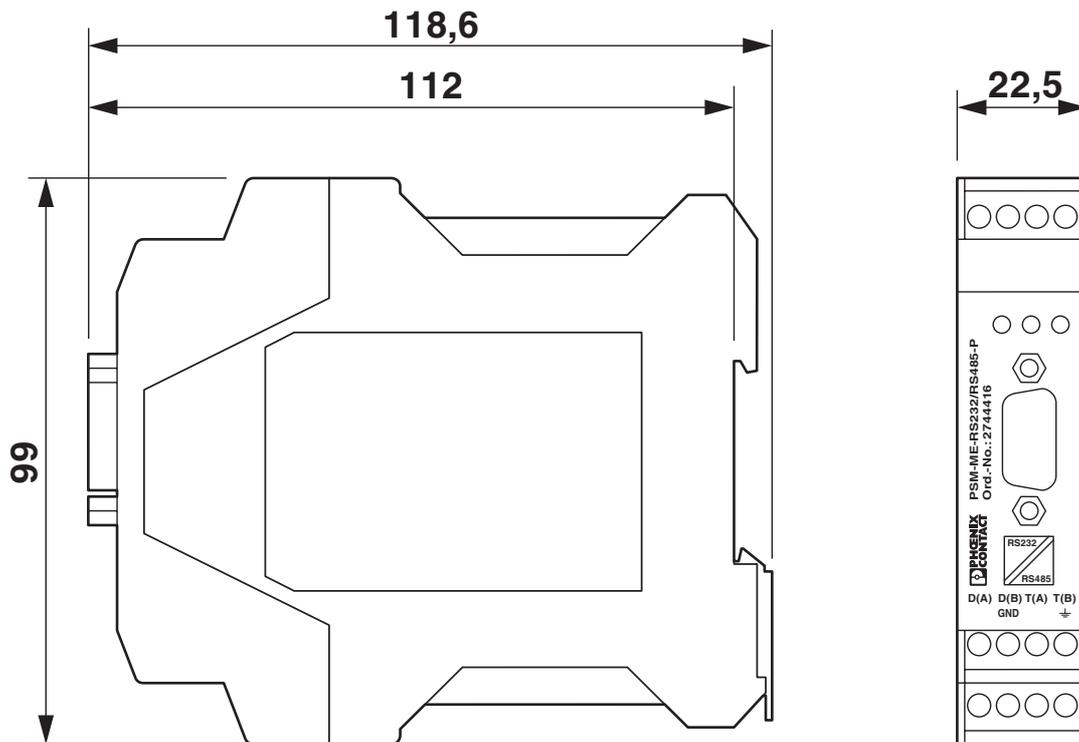


Slim design

2744461

<https://www.phoenixcontact.com/us/products/2744461>


## Application drawing

### Electrical Isolation

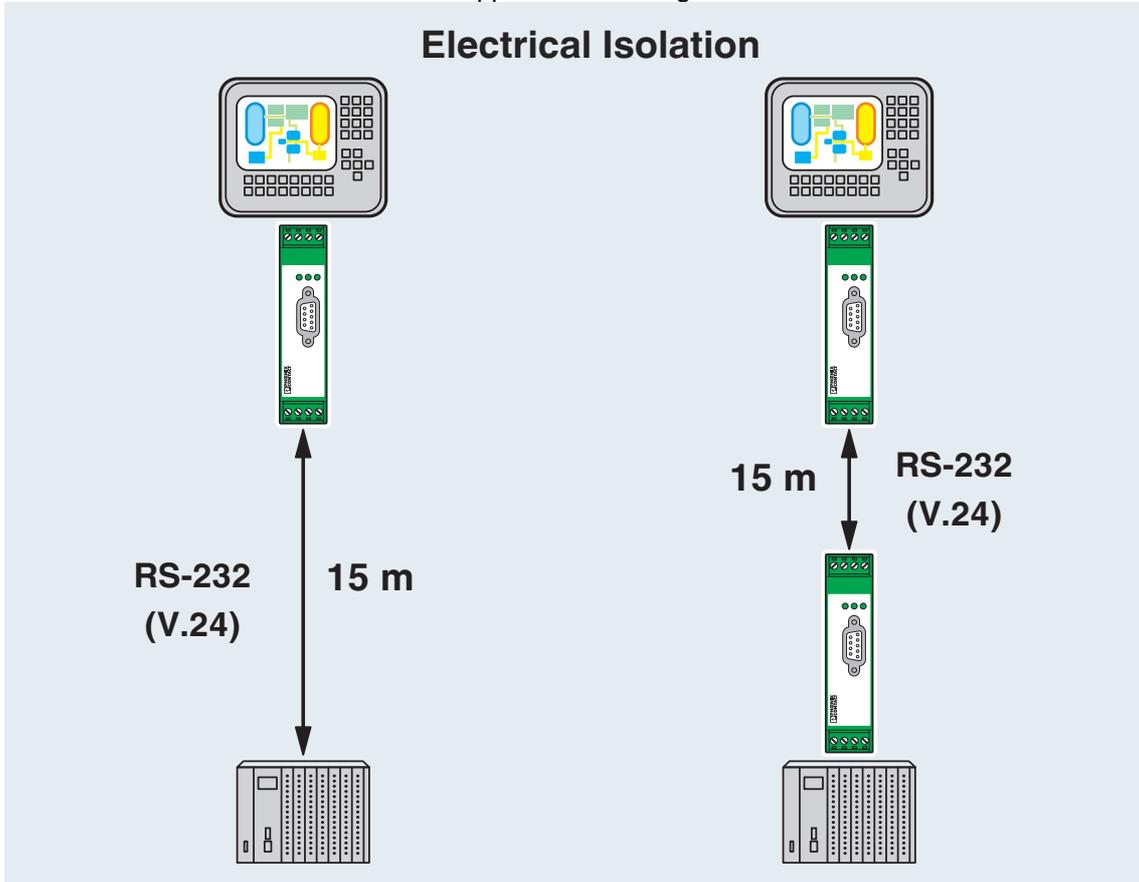


Electrical isolation

Application drawing

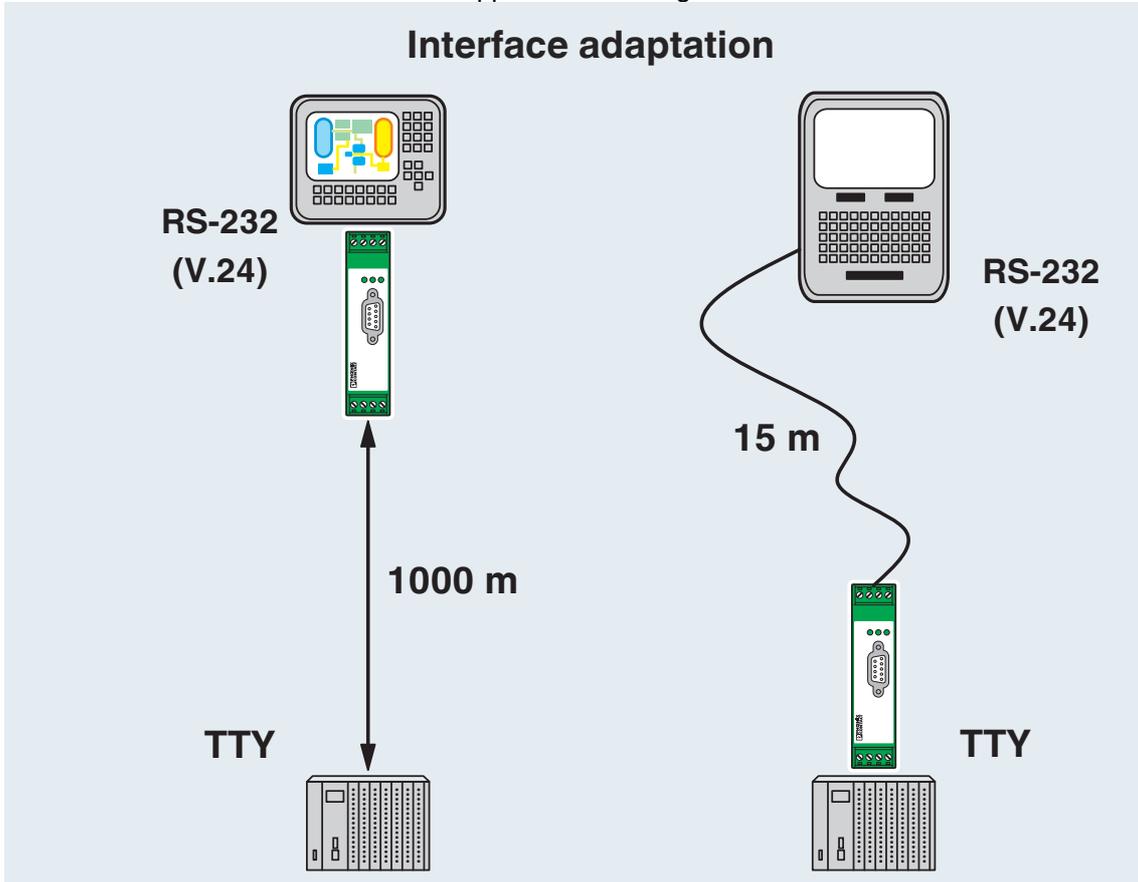


Interface adaptation

Connection diagram

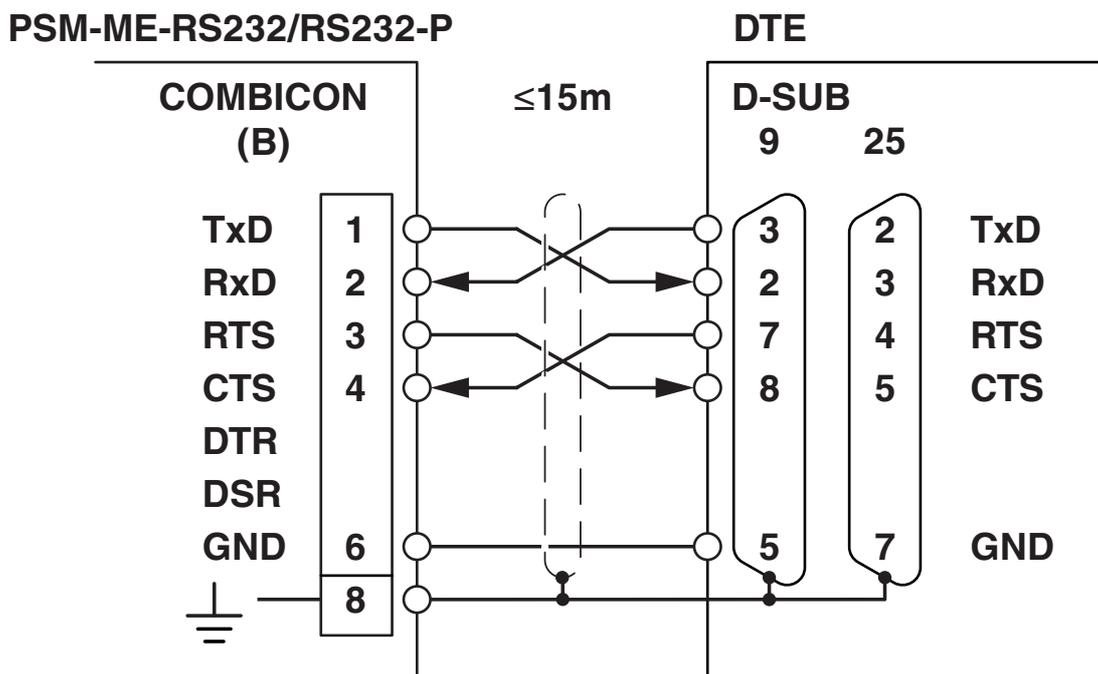


Connection to a DTE device

Connection diagram

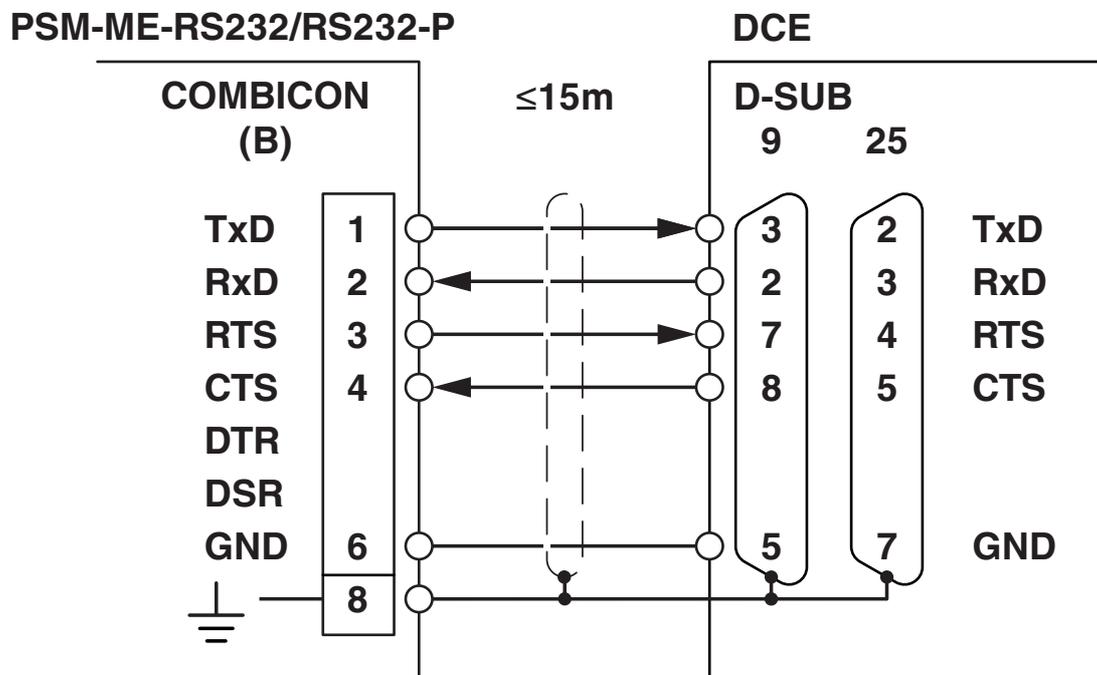

Connection to a DCE device

Schematic diagram

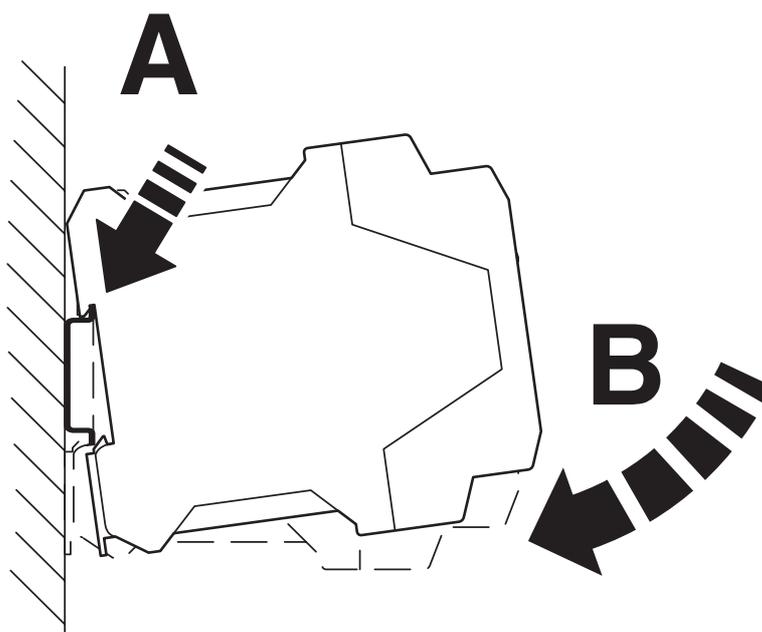

Mounting


# PSM-ME-RS232/RS232-P - Interface converter



2744461

<https://www.phoenixcontact.com/us/products/2744461>

### Circuit diagram

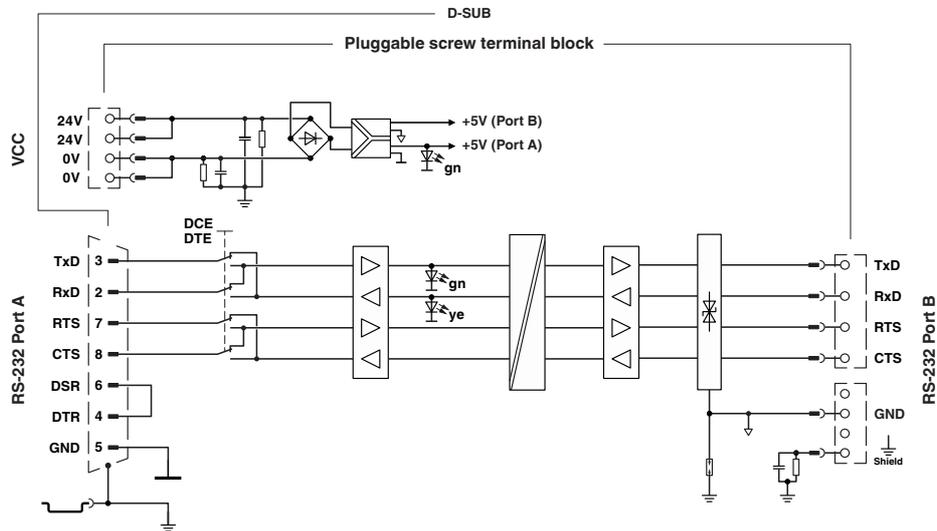

Basic circuit diagram

2744461

<https://www.phoenixcontact.com/us/products/2744461>

## Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/2744461>



**cUL Recognized**  
Approval ID: E238705



**UL Recognized**  
Approval ID: E238705



**DNV GL**  
Approval ID: TAA00001KR



**cUL Recognized**  
Approval ID: FILE E 199827



**UL Recognized**  
Approval ID: E199827



**cUL Listed**  
Approval ID: E199827



**UL Listed**  
Approval ID: E199827

# PSM-ME-RS232/RS232-P - Interface converter



2744461

<https://www.phoenixcontact.com/us/products/2744461>

## Classifications

### ECLASS

ECLASS-13.0	27242208
ECLASS-15.0	27242208

### ETIM

ETIM 9.0	EC001423
----------	----------

### UNSPSC

UNSPSC 21.0	32151700
-------------	----------

# PSM-ME-RS232/RS232-P - Interface converter



2744461

<https://www.phoenixcontact.com/us/products/2744461>

## Environmental product compliance

### EU RoHS

Fulfills EU RoHS substance requirements	Yes
Exemption	6(c), 7(a), 7(c)-I

### China RoHS

Environment friendly use period (EFUP)	EFUP-50
	An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.

### EU REACH SVHC

REACH candidate substance (CAS No.)	Lead(CAS: 7439-92-1)
SCIP	60eb51f9-e2b0-407c-af57-e7f11b51bdde

### EF3.0 Climate Change

CO2e kg	3.937 kg CO2e
---------	---------------

Phoenix Contact 2025 © - all rights reserved  
<https://www.phoenixcontact.com>

Phoenix Contact USA  
586 Fulling Mill Road  
Middletown, PA 17057, United States  
(+717) 944-1300  
[info@phoenixcon.com](mailto:info@phoenixcon.com)