


## Xelity 8TX GE Unmanaged Switch 8 Port 1000Mbit

Art.No.: 58815  
 Weight: 0.154  
 Country of origin: DE  
 Model designation: Xelity 8TX GE

8 port unmanaged switch  
 Connection cables are in the online shop under "Connection Technology".

### Link to Product

#### Illustration

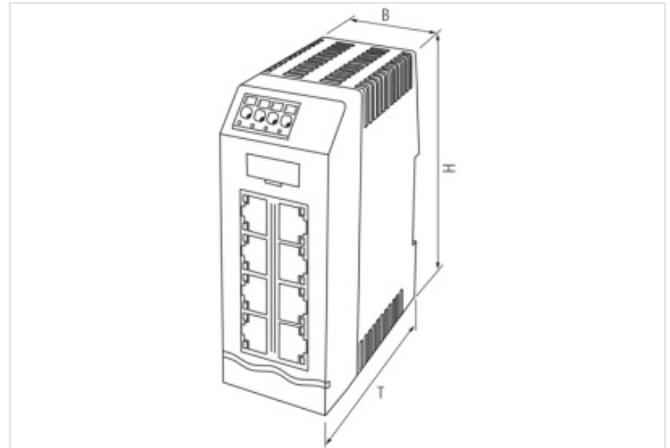

Product may differ from Image



#### Commercial data

URL Webshop	<a href="https://shop.murrelektronik.com/58815">https://shop.murrelektronik.com/58815</a>
GTIN	4065909013229
ECLASS-7.1	19170106
ECLASS-8.1	19170106
ECLASS-9.1	19170106
ECLASS-10.0.1	19170401
ECLASS-11.0	19170401
ECLASS-13.0	19170401
ECLASS-14.0	19170401
EAN	4065909013229

#### Electrical data | Supply

Operating voltage DC	24 V
Operating voltage DC min.	9 V
Operating voltage DC max.	30 V

#### Industrial communication

Data transmission rate max.	1,000 MBit/s
-----------------------------	--------------

#### Industrial communication | Ethernet functionality

VLAN unmanaged (IEEE 802.1Q)	Tag forwarding
Switch type	unmanaged

duplex	Full duplex
Auto-negotiation	yes
Auto-crossover	yes
<b>Diagnostics</b>	
Alarm contact	no
Diagnostic	No voltage
LED display	Ethernet connection/data traffic
<b>Device protection   Electrical</b>	
Degree of protection (EN IEC 60529)	IP20
<b>Mechanical data   Material data</b>	
Material housing	Plastic
Color housing	black
<b>Mechanical data   Mounting data</b>	
Height	105 mm
Width	41.6 mm
Depth	85.1 mm
Mounting method	geschnappt
Suitable for mounting type	Mounting rail TH35, (EN 60715)
<b>Environmental characteristics   Climatic</b>	
Operating temperature min.	-40 °C
Operating temperature max.	75 °C
Storage temperature min.	-40 °C
Storage temperature max.	85 °C
<b>Connection type 2</b>	
Connection type 1	8
Family construction form	RJ45
No. of poles	8
Gender	female
Color contact carrier	black
PIN 1	TD +
PIN 2	TD -
PIN 3	RD +
PIN 4	n.c.
PIN 5	n.c.
PIN 6	RD -
PIN 7	n.c.
PIN 8	n.c.
Family construction form	terminal
No. of poles	4
Gender	female
Color contact carrier	green
Connection	Spring clamp terminals FK
PIN 1	24 V DC (UB 1)
PIN 2	0 V
PIN 3	PE
PIN 4	n.c.