

Xenterra 5TX unmanaged Switch 5 Port 100Mbit

Art.No.: 58900
 Weight: 0.205
 Country of origin: DE
 Model designation: Xenterra 5TX


5 port unmanaged switch
 DIN-rail mountable TH35 (EN 60715)
 Connection cables are in the online shop under "Connection Technology".

Link to Product

Illustration



Product may differ from Image

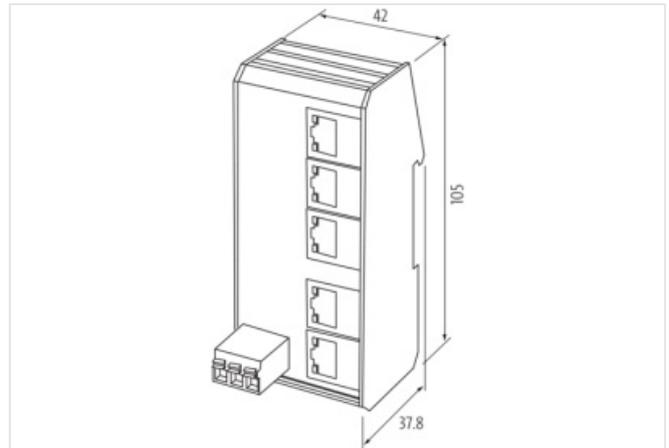

Commercial data

URL Webshop	https://shop.murrelektronik.com/58900
GTIN	4048879829946
ECLASS-6.0	19170106
ECLASS-6.1	19170106
ECLASS-7.0	19170106
ECLASS-7.1	19170106
ECLASS-8.0	19170106
ECLASS-8.1	19170106
ECLASS-9.0	19170402
ECLASS-9.1	19170106
ECLASS-10.0.1	19170402
ECLASS-10.1	19170402
ECLASS-11.0	19170402
ECLASS-11.1	19170402
ECLASS-12.0	19170402
ECLASS-13.0	19170402
ECLASS-14.0	19170402
ETIM-5.0	EC000734
ETIM-6.0	EC000734
ETIM-7.0	EC000734

ETIM-8.0	EC000734
EAN	4048879829946

Electrical data | Supply

Operating voltage AC min.	8 V
Operating voltage AC max.	28 V
Operating voltage DC min.	9 V
Operating voltage DC max.	36 V

Industrial communication

Data transmission rate max.	100 MBit/s
-----------------------------	------------

Industrial communication | Ethernet functionality

VLAN unmanaged (IEEE 802.1Q)	yes
Switch type	unmanaged
duplex	Full duplex
Auto-negotiation	yes
Auto-crossover	yes

Diagnostics

Alarm contact	no
Diagnostic	No voltage
LED display	Ethernet connection/data traffic

Device protection | Electrical

Degree of protection (EN IEC 60529)	IP20
Invers-polarity protection	yes
Over voltage protection	yes

Mechanical data | Material data

Material housing	Metal
Color housing	black

Mechanical data | Mounting data

Height	105 mm
Width	42 mm
Depth	32.5 mm
Mounting method	geschnappt
Suitable for mounting type	Mounting rail TH35, (EN 60715)

Environmental characteristics | Climatic

Operating temperature min.	-40 °C
Operating temperature max.	70 °C
Storage temperature min.	-40 °C
Storage temperature max.	85 °C

Connection type 1

Connection type 1	5
Family construction form	RJ45
No. of poles	8
Gender	female
Color contact carrier	black
PIN 1	TD +
PIN 2	TD -
PIN 3	RD +
PIN 4	n.c.
PIN 5	n.c.
PIN 6	RD -
PIN 7	n.c.
PIN 8	n.c.

