


## Xenterra 8TX unmanaged Switch 8 Port 100Mbit

Art.No.: 58902  
 Weight: 0.255  
 Country of origin: DE  
 Model designation: Xenterra 8TX

8 port unmanaged switch  
 DIN-rail mountable TH35 (EN 60715)  
 Connection cables are in the online shop under "Connection Technology".

### Link to Product

#### Illustration

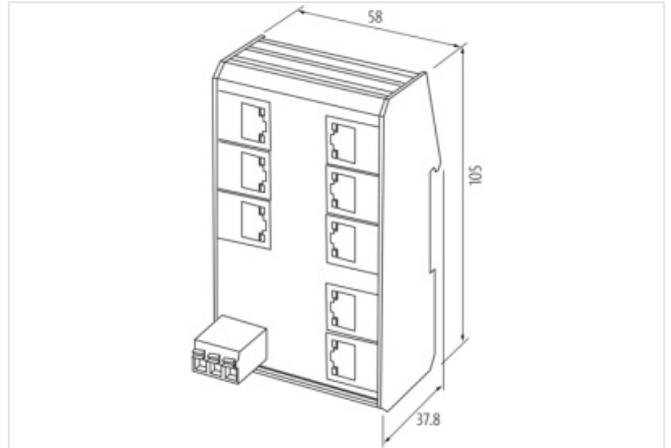

Product may differ from Image



#### Commercial data

URL Webshop	<a href="https://shop.murrelektronik.com/58902">https://shop.murrelektronik.com/58902</a>
GTIN	4048879830294
ECLASS-6.0	19170106
ECLASS-6.1	19170106
ECLASS-7.0	19170106
ECLASS-7.1	19170106
ECLASS-8.0	19170106
ECLASS-8.1	19170106
ECLASS-9.0	19170402
ECLASS-9.1	19170106
ECLASS-10.0.1	19170402
ECLASS-10.1	19170402
ECLASS-11.0	19170402
ECLASS-11.1	19170402
ECLASS-12.0	19170402
ECLASS-13.0	19170402
ECLASS-14.0	19170402
ETIM-5.0	EC000734
ETIM-6.0	EC000734
ETIM-7.0	EC000734

ETIM-8.0	EC000734
EAN	4048879830294
<b>Electrical data   Supply</b>	
Operating voltage AC min.	8 V
Operating voltage AC max.	28 V
Operating voltage DC min.	9 V
Operating voltage DC max.	36 V
<b>Industrial communication</b>	
Data transmission rate max.	100 MBit/s
<b>Industrial communication   Ethernet functionality</b>	
VLAN unmanaged (IEEE 802.1Q)	yes
Switch type	unmanaged
duplex	Full duplex
Auto-negotiation	yes
Auto-crossover	yes
<b>Diagnostics</b>	
Alarm contact	no
Diagnostic	No voltage
LED display	Ethernet connection/data traffic
<b>Device protection   Electrical</b>	
Degree of protection (EN IEC 60529)	IP20
<b>Mechanical data   Material data</b>	
Material housing	Metal
Color housing	black
<b>Mechanical data   Mounting data</b>	
Height	105 mm
Width	58 mm
Depth	37.8 mm
Mounting method	geschnappt
Suitable for mounting type	Mounting rail TH35, (EN 60715)
<b>Environmental characteristics   Climatic</b>	
Operating temperature min.	-40 °C
Operating temperature max.	70 °C
Storage temperature min.	-40 °C
Storage temperature max.	85 °C
<b>Connection type 1</b>	
Connection type 1	8
Family construction form	RJ45
No. of poles	8
Gender	female
Color contact carrier	black
PIN 1	TD +
PIN 2	TD -
PIN 3	RD +
PIN 4	n.c.
PIN 5	n.c.
PIN 6	RD -
PIN 7	n.c.
PIN 8	n.c.