

Xenterra 8TX unmanaged Switch wallmounted 8 Port 100Mbit WM

Art.No.: 58903
 Weight: 0.225
 Country of origin: DE
 Model designation: Xenterra 8TX WM


8 port unmanaged switch
 Key-hole mounting/screwable
 Connection cables are in the online shop under "Connection Technology".

Link to Product

Illustration



Product may differ from Image

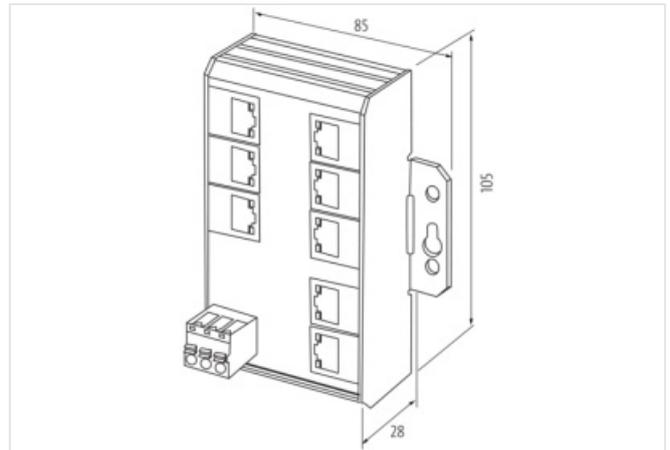

Commercial data

| | |
|---------------|---|
| URL Webshop | https://shop.murrelektronik.com/58903 |
| GTIN | 4048879830409 |
| ECLASS-6.0 | 19170106 |
| ECLASS-6.1 | 19170106 |
| ECLASS-7.0 | 19170106 |
| ECLASS-7.1 | 19170106 |
| ECLASS-8.0 | 19170106 |
| ECLASS-8.1 | 19170106 |
| ECLASS-9.0 | 19170402 |
| ECLASS-9.1 | 19170106 |
| ECLASS-10.0.1 | 19170402 |
| ECLASS-10.1 | 19170402 |
| ECLASS-11.0 | 19170402 |
| ECLASS-11.1 | 19170402 |
| ECLASS-12.0 | 19170402 |
| ECLASS-13.0 | 19170402 |
| ECLASS-14.0 | 19170402 |
| ETIM-5.0 | EC000734 |
| ETIM-6.0 | EC000734 |
| ETIM-7.0 | EC000734 |

| | |
|--|----------------------------------|
| ETIM-8.0 | EC000734 |
| EAN | 4048879830409 |
| Electrical data Supply | |
| Operating voltage AC min. | 8 V |
| Operating voltage AC max. | 28 V |
| Operating voltage DC min. | 9 V |
| Operating voltage DC max. | 36 V |
| Industrial communication | |
| Data transmission rate max. | 100 MBit/s |
| Industrial communication Ethernet functionality | |
| VLAN unmanaged (IEEE 802.1Q) | yes |
| Switch type | unmanaged |
| duplex | Full duplex |
| Auto-negotiation | yes |
| Auto-crossover | yes |
| Diagnostics | |
| Alarm contact | no |
| Diagnostic | No voltage |
| LED display | Ethernet connection/data traffic |
| Device protection Electrical | |
| Degree of protection (EN IEC 60529) | IP20 |
| Mechanical data Material data | |
| Material housing | Metal |
| Color housing | black |
| Mechanical data Mounting data | |
| Height | 105 mm |
| Width | 85 mm |
| Depth | 28 mm |
| Mounting method | screwed |
| Suitable for mounting type | Schlüssellochauhängung |
| Environmental characteristics Climatic | |
| Operating temperature min. | -40 °C |
| Operating temperature max. | 70 °C |
| Storage temperature min. | -40 °C |
| Storage temperature max. | 85 °C |
| Connection type 1 | |
| Connection type 1 | 8 |
| Family construction form | RJ45 |
| No. of poles | 8 |
| Gender | female |
| Color contact carrier | black |
| PIN 1 | TD + |
| PIN 2 | TD - |
| PIN 3 | RD + |
| PIN 4 | n.c. |
| PIN 5 | n.c. |
| PIN 6 | RD - |
| PIN 7 | n.c. |
| PIN 8 | n.c. |