

Xenterra 5TX unmanaged Switch 5 Port 1000Mbit

Art.No.: 58906

Weight: 0.23

Country of origin: DE

Model designation: Xenterra 5TX GE

Xenterra 5TX GE

5 Port Unmanaged IP20 PoE Gigabit Switch

DIN-rail mountable TH35 (EN 60715)


Connection cables are in the online shop under "Connection Technology".

Link to Product

Illustration



Product may differ from Image

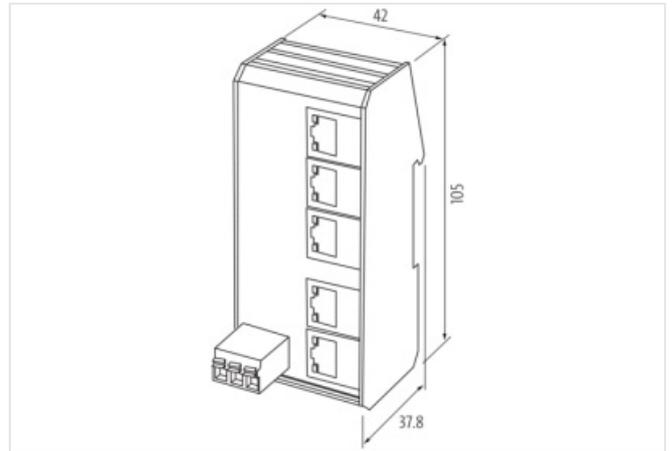

Commercial data

URL Webshop	https://shop.murrelektronik.com/58906
GTIN	4048879830447
ECLASS-6.1	19170106
ECLASS-7.0	19170106
ECLASS-7.1	19170106
ECLASS-8.0	19170106
ECLASS-8.1	19170106
ECLASS-9.0	19170402
ECLASS-9.1	19170106
ECLASS-10.0.1	19170402
ECLASS-10.1	19170402
ECLASS-11.0	19170402
ECLASS-11.1	19170402
ECLASS-12.0	19170402
ECLASS-13.0	19170402
ECLASS-14.0	19170402
EAN	4048879830447

Electrical data | Supply

The information in this Product-PDF has been compiled with the utmost care.

Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2025-10-20

Murrelektronik Inc. | 1327 Northbrook Parkway, Suite 460 | Suwanee, GA 30024 | Fon +1 770 497-9292 | Fax +1 770 497-9391 | shop@murrinc.com | shop.murrinc.com

Operating voltage AC min.	8 V
Operating voltage AC max.	28 V
Operating voltage DC min.	9 V
Operating voltage DC max.	36 V

Industrial communication

Data transmission rate max.	1,000 MBit/s
-----------------------------	--------------

Industrial communication | Ethernet functionality

VLAN unmanaged (IEEE 802.1Q)	yes
Switch type	unmanaged
duplex	Full duplex
Auto-negotiation	yes
Auto-crossover	yes

Diagnostics

Alarm contact	no
Diagnostic	No voltage
LED display	Ethernet connection/data traffic

Device protection | Electrical

Degree of protection (EN IEC 60529)	IP20
-------------------------------------	------

Mechanical data | Material data

Material housing	Metal
Color housing	black

Mechanical data | Mounting data

Height	105 mm
Width	110 mm
Depth	37.8 mm
Mounting method	geschnappt
Suitable for mounting type	Mounting rail TH35, (EN 60715)

Environmental characteristics | Climatic

Operating temperature min.	-40 °C
Operating temperature max.	70 °C
Storage temperature min.	-40 °C
Storage temperature max.	85 °C

Connection type 1

Connection type 1	5
Family construction form	RJ45
No. of poles	8
Gender	female
Color contact carrier	black
PIN 1	TD +
PIN 2	TD -
PIN 3	RD +
PIN 4	n.c.
PIN 5	n.c.
PIN 6	RD -
PIN 7	n.c.
PIN 8	n.c.