

## Xenterra 8TX unmanaged Switch 8 Port 1000Mbit

Art.No.: 58908

Weight: 0.28


Country of origin: DE

Model designation: Xenterra 8TX GE

8 Port Unamanged IP20 Gigabit Switch

### Link to Product

#### Illustration

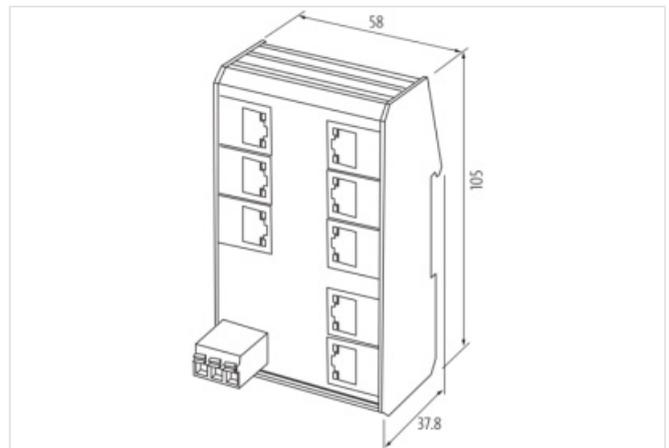

Product may differ from Image



#### Commercial data

URL Webshop	<a href="https://shop.murrelektronik.com/58908">https://shop.murrelektronik.com/58908</a>
GTIN	4048879873543
ECLASS-6.1	19170106
ECLASS-7.0	19170106
ECLASS-7.1	19170106
ECLASS-8.0	19170106
ECLASS-8.1	19170106
ECLASS-9.0	19170402
ECLASS-9.1	19170106
ECLASS-10.0.1	19170402
ECLASS-10.1	19170402
ECLASS-11.0	19170402
ECLASS-11.1	19170402
ECLASS-12.0	19170402
ECLASS-13.0	19170402
ECLASS-14.0	19170402
EAN	4048879873543

#### Electrical data | Supply

Operating voltage AC min.	8 V
Operating voltage AC max.	28 V
Operating voltage DC min.	9 V
Operating voltage DC max.	36 V

The information in this Product-PDF has been compiled with the utmost care.

Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2025-10-20

Murrelektronik Inc. | 1327 Northbrook Parkway, Suite 460 | Suwanee, GA 30024 | Fon +1 770 497-9292 | Fax +1 770 497-9391 | [shop@murrinc.com](mailto:shop@murrinc.com) | [shop.murrinc.com](http://shop.murrinc.com)

Industrial communication	
Data transmission rate max.	1,000 MBit/s
Industrial communication   Ethernet functionality	
VLAN unmanaged (IEEE 802.1Q)	yes
Switch type	unmanaged
duplex	Full duplex
Auto-negotiation	yes
Auto-crossover	yes
Diagnostics	
Alarm contact	no
Diagnostic	No voltage
LED display	Ethernet connection/data traffic
Device protection   Electrical	
Degree of protection (EN IEC 60529)	IP20
Mechanical data   Material data	
Material housing	Metal
Color housing	black
Mechanical data   Mounting data	
Height	105 mm
Width	58 mm
Depth	37.8 mm
Mounting method	geschnappt
Suitable for mounting type	Mounting rail TH35, (EN 60715)
Environmental characteristics   Climatic	
Operating temperature min.	-40 °C
Operating temperature max.	70 °C
Storage temperature min.	-40 °C
Storage temperature max.	85 °C
Connection type 1	
Connection type 1	8
Family construction form	RJ45
No. of poles	8
Gender	female
Color contact carrier	black
PIN 1	TD +
PIN 2	TD -
PIN 3	RD +
PIN 4	n.c.
PIN 5	n.c.
PIN 6	RD -
PIN 7	n.c.
PIN 8	n.c.