




DB201-DB207

2.0A SURFACE MOUNT GLASS PASSIVATED BRIDGE RECTIFIER


Features

- Glass Passivated Die Construction
- Low leakage
- Ideal for printed circuit board
- Surge overload rating-30A peak
- Designed for Surface Mount Application
- Plastic Material-UL Flammability 94V-0

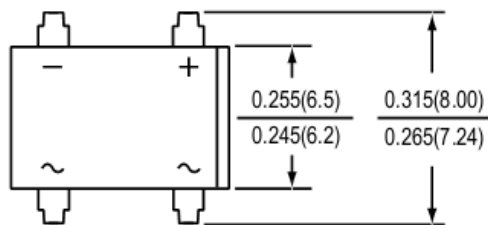

Mechanical Data

- Case:Reliable low cost construction utilizing molded plastic technique
- Terminals:Plated Leads Solderable per MIL-STD-202,Method208
- Polarity:As Marked on Case
- Mounting Position:Any
- Marking:Type Number

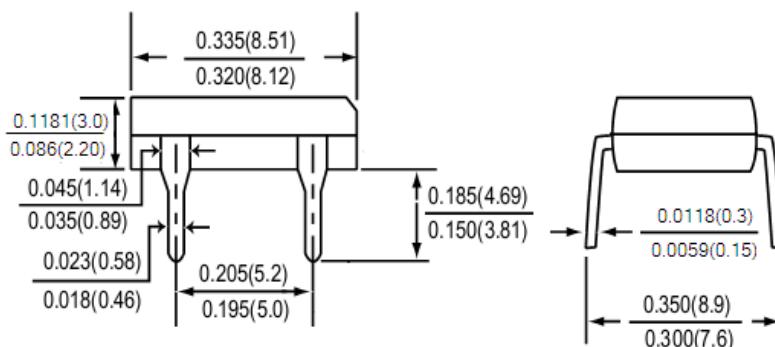

Maximum Ratings and Electrical Characteristics @TA=25°C unless otherwise specified

Single Phase,half wave,60Hz,resistive or inductive load.For capacitive load,derate current by 20%.

Parameter	Symbol	DB201	DB202	DB203	DB204	DB205	DB206	DB207	UNIT
Maximum repetitive peak reverse voltage	V_{RRM}	50	100	200	400	600	800	1000	V
Maximum RMS voltage	V_{RMS}	35	70	140	280	420	560	700	V
Maximum DC blocking voltage	V_{DC}	50	100	200	400	600	800	1000	V
Maximum Average forward output rectified current @TA=40°C	I (AV)	2.0							V
Peak forward surge current 8.3ms single sine-wave superimposed on rated load(JEDEC Method)	I_{FSM}	50							A
Maximum instantaneous forward voltage drop per diode @2.0A	V_F	1.1							V
Maximum DC reverse current at TA=25°C rated DC blocking voltage per leg TA=125°C	I_R	5.0 500							uA
Typical thermal resistance per leg (Note1)	$R_{\theta JA}$	40							°C /W
	$R_{\theta JL}$	15							
Operating junction temperature range	T_J	-55 to +150							°C
storage temperature range	T_{stg}	-55 to +150							°C

Note:

- 1.Mounted on glass epoxy PC board with 1.3mm² solder pad.
- 2.Mounted on aluminum substrate PC board with 1.3mm² solder pad.
- 3.Measured at 1.0MHz and applied reverse of 4.0V D.C.



GAIA TECH

DB201 - DB207



2.0A SURFACE MOUNT GLASS PASSIVATED BRIDGE RECTIFIER

FIG.1-DERATING CURVE FOR OUTPUT RECTIFIED CURRENT

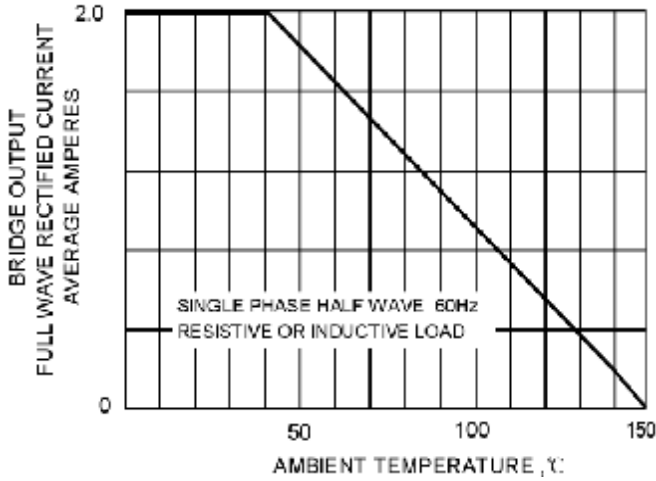


FIG.2 - MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

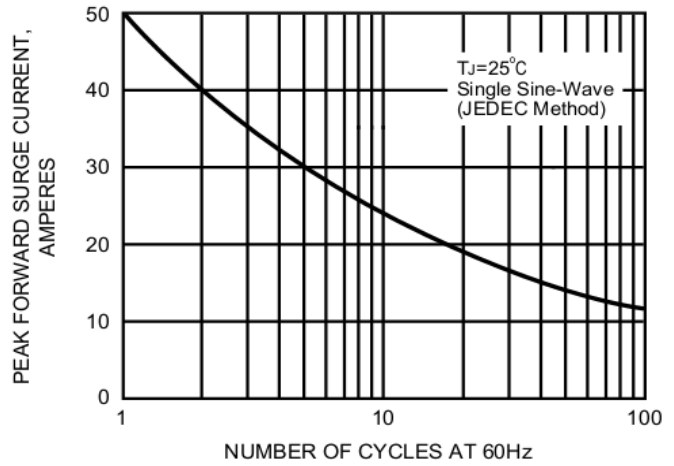


FIG. 3 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

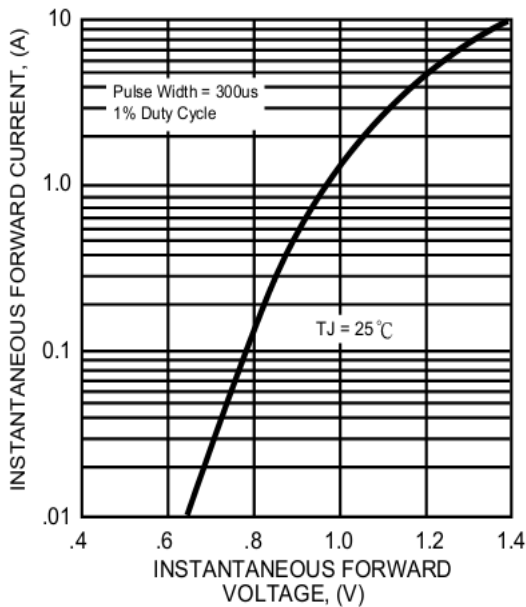


FIG. 4 - TYPICAL REVERSE CHARACTERISTICS

