



**GAIA TECH**

## Data Sheet

---

Customer:

Part No:

Sample No:

Description:

Item No:

_____
GT09-5CPD
_____
BUZZER
_____
_____

Customer			
Check	Inspection	Approval	Date



General specification



Item		Spec	Condition
1	Rated voltage	5Vo-p	
2	Operation voltage	4-8Vo-p	
3	Sound Pressure Level=SPL	Min 85dB	Standard State,Standard Drive Circuit. Rated voltage,Distance at 0.1m
4	current	Max40mA	
5	Oscillation frequency	2731HZ	
6	Coil Resistance	$42 \pm 4 \Omega$	
7	Operating Temperature	-20~+70°C	
8	Storage temperature	-30~+80°C	
9	Externals size (mm)	$\Phi 9.6 * H5$	Refer to the attached drawing
10	Mass	0.8g	
11	Housing Material		

Electrical And Acoustical Measuring Condition





**Recommended Driving Circuit** Resonant

frequency, 1/2 duty cycle. Square wave. Signal amplitude should be large enough to saturate the transistor.

**Recommended Setting**

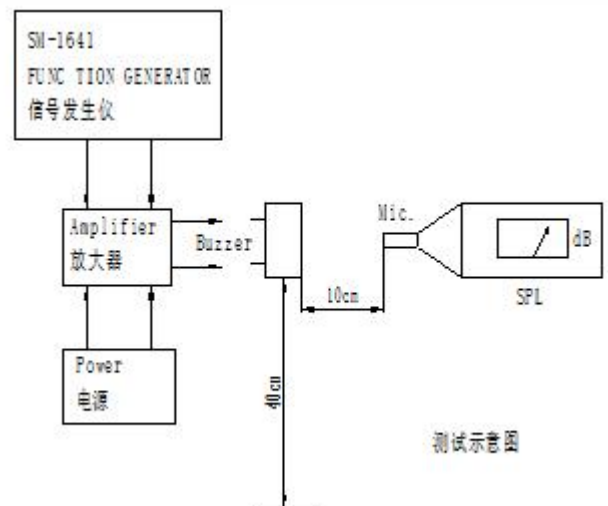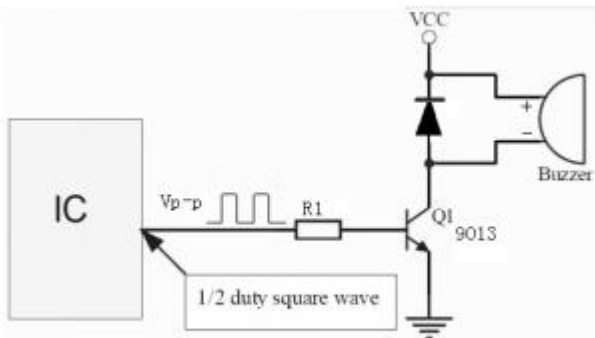

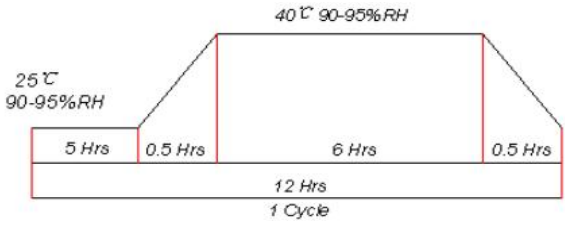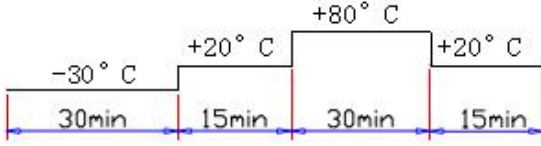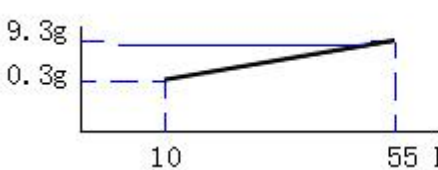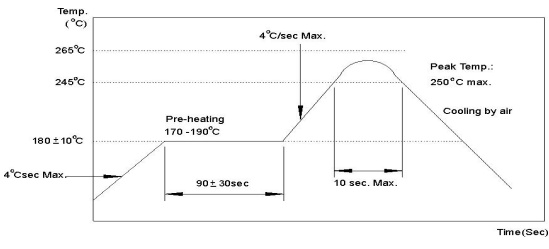


	ITEM	TEST
1	High Temperature Test	After being placed in a chamber with $+80\pm 2^{\circ}\text{C}$ for 96 hours and then being placed in normal condition for 2 hours
2	Low Temperature Test	After being placed in a chamber with $-20\pm 2^{\circ}\text{C}$ for 96 hours and then being placed in normal condition for 2 hours
3	Humidity Test	
4	Temperature Cycle Test	 <p>Make this test for 5 cycle without applying power, then expose to the room temperature for 2 hours</p>
5	Vibration Test	 <p>Amplitude: 1.5mm Time : 1min/axis</p> <p>Make this test for the directions of X, Y, Z for 2 hours each (total 6 hours).</p>
6	Drop Test	Drop on a hard wood board of 40mm thick, any directions, three times, at the height of 70cm
7	Terminal Strength Pulling Test	The force 5 seconds of 1.0kg is applied to each terminal.
8	Solder ability Test	Lead terminals are immersed in rosin for 5 seconds and then immersed in solder bath of $255\pm 5^{\circ}\text{C}$ for $3\pm 0.5$ seconds.
9	Soldering Test	




Dimension

(UNT: mm)

Tolerance:  $\pm 0.5\text{mm}$  Except Specified



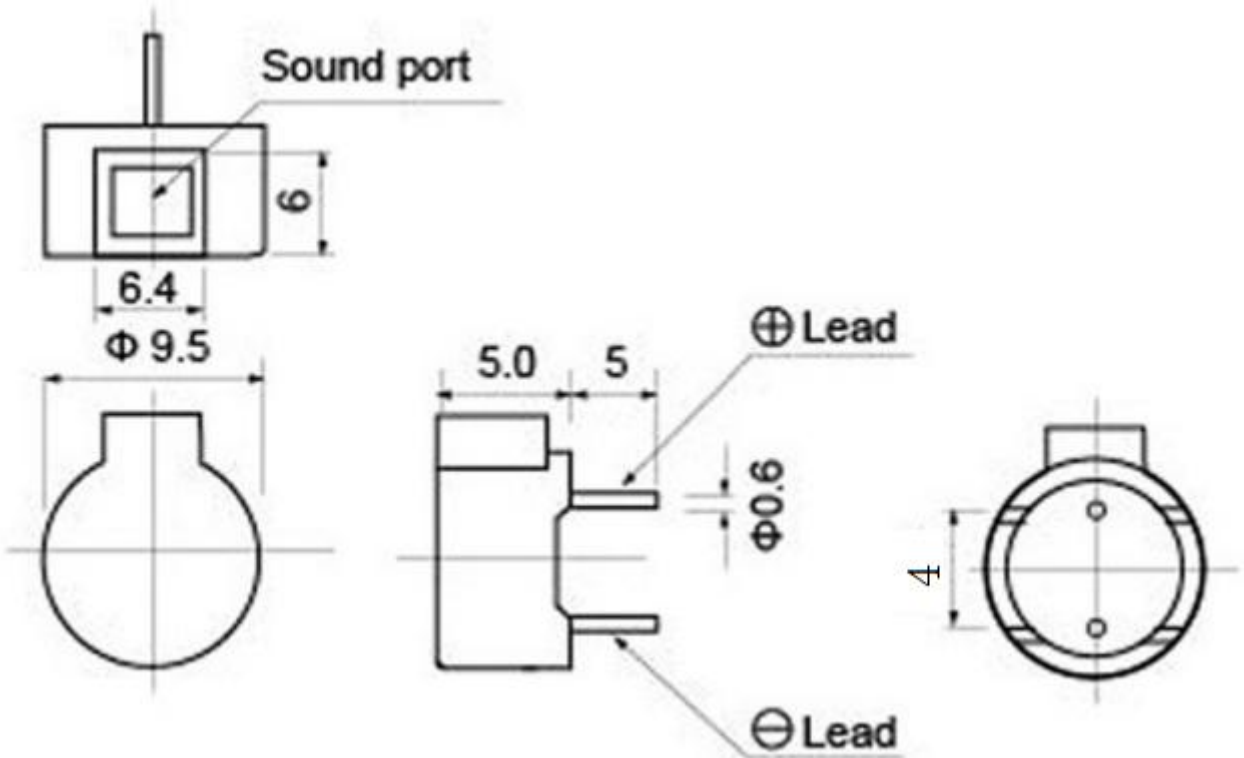


Frequency Curve

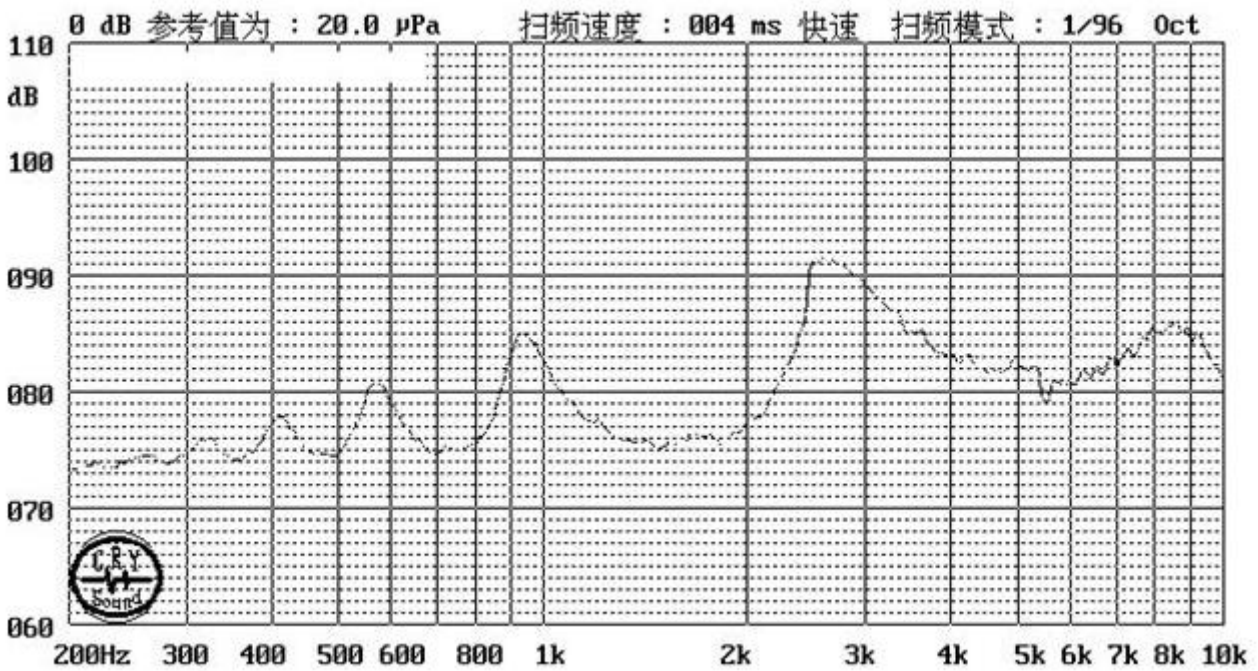

5Vo-p 50% duty Square wave, 10cm

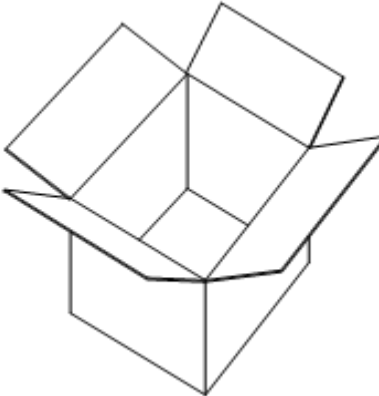

Item	Drawing	Qty(pcs.)	Material	Specification (m m)
Packing		100 (10×10)	PE	78×78×20
MiddleBox	 <p>顶层加一块上盖</p> <p>Plastic Bag (10PCS Foam Tray)</p>	1000 (10×100)	Paper	780×780×110
OuterBox		10000 (10 × 1000)	Paper	500×420×270