




CIXI WANJIE ELECTRONIC CO., LTD

THE SPEC SHEET

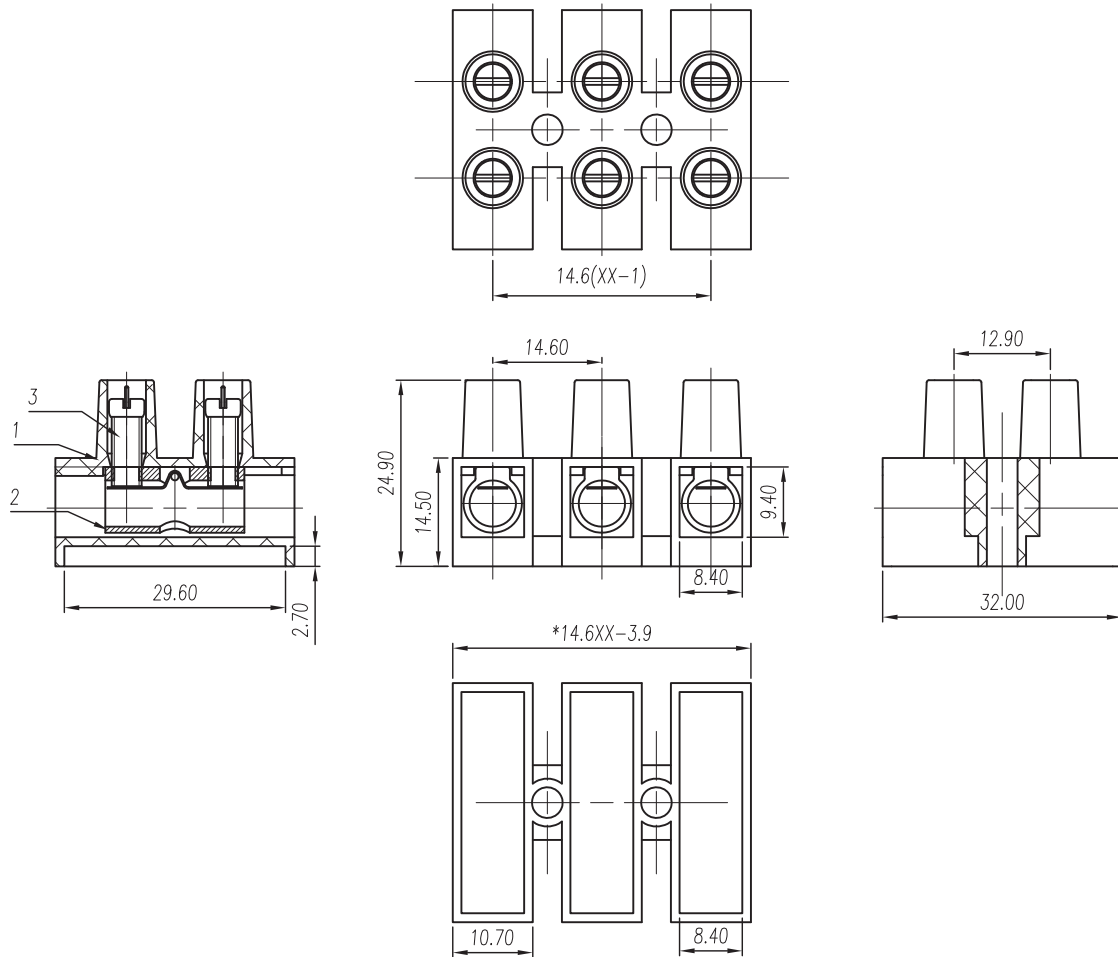

Electrical

| | | |
|-----------------------|----------------|---------------------|
| Standard | UL | IEC |
| Rated voltage | 600V | 750V |
| Rated current | 65A | 76A |
| Contact resistance | 20mΩ | |
| Insulation resistance | 500MΩ/DC500V | |
| Wire range | 20~6AWG | 16.0mm ² |
| Wrth standing voltage | AC 2000V/1 Min | |

Mechanical

| | |
|--------------|------------------|
| Torque | 1.2Nm(10.8Lb.in) |
| Temp.Range | -40°C~+105°C |
| Steip Length | 7-8mm |

Dimensions

| | |
|-------|--------|
| Pitch | 14.6mm |
| Poles | 2~12p |

Material


| | |
|-----------------|---------------------|
| Housing | PA66, UL94V-2 |
| Screws | M4 Steel, Zn plated |
| Copper Cylinder | Brass ,Ni plated |

linear dimension(Tolerances Standard GB/T 14486-2008)

| | linear dimension(Tolerances Standard GB/T 14486-2008) | | | | | | | | | | ≡ | — | ▱ | // | ⊥ | |
|----------------|-------------------------------------------------------|--------------|---------------|---------------|---------------|---------------|----------------|-----------------|-----------------|-----------------|-------|------|--------------|----------------|-------------|-----|
| variable range | to 6 | over 6 to 10 | over 10 to 18 | over 18 to 30 | over 30 to 50 | over 50 to 80 | over 80 to 120 | over 120 to 160 | over 160 to 200 | over 200 to 250 | all | to 5 | over 5 to 30 | over 30 to 120 | over 120 to | |
| tolerance | ±0.1 | ±0.14 | ±0.19 | ±0.25 | ±0.32 | ±0.43 | ±0.57 | ±0.72 | ±0.88 | ±1.05 | ±1.25 | 0.5 | 0.025 | 0.06 | 0.12 | 0.4 |

UNITS mm SIZE A4 SCALE 1:1

THIRD ANGLE PROJECTION



CIXI WANJIE ELECTRONIC CO., LTD

TITLE MY16HW+1.2-14.6-XXP-1YY-00A