

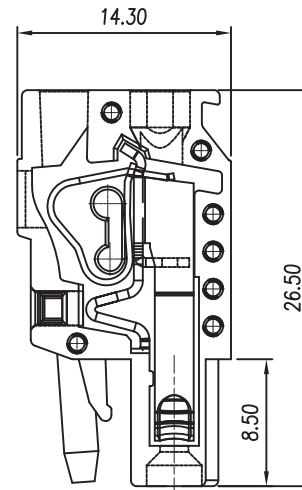
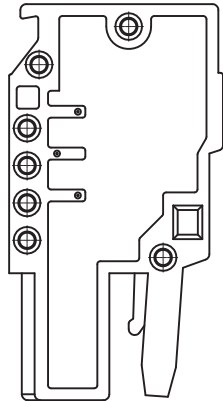


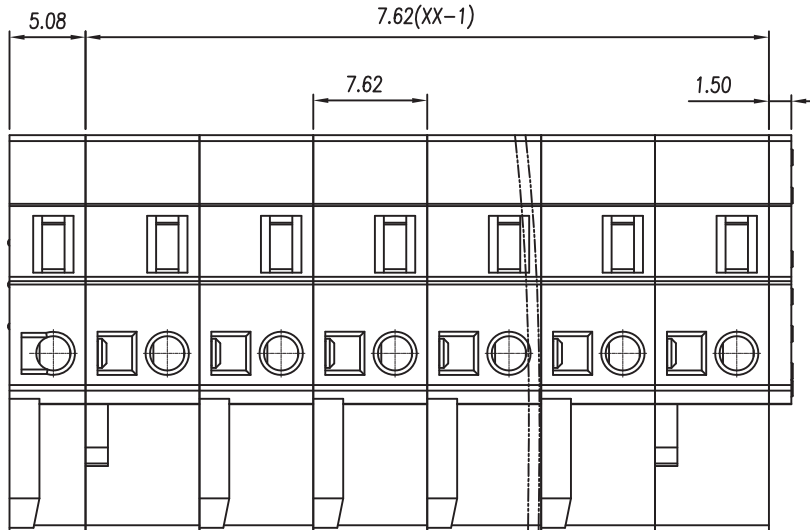

CIXI WANJIE ELECTRONIC CO., LTD

THE SPEC SHEET

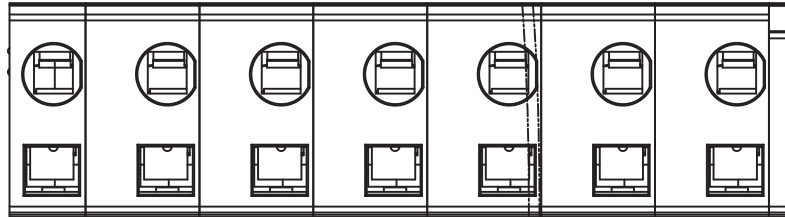

Electrical

| | | |
|-----------------------|----------------|--------------------|
| Standard | UL | IEC |
| Rated voltage | 300V | 250V |
| Rated current | 15A | 16A |
| Contact resistance | 20mΩ | |
| Insulation resistance | 500MΩ/DC500V | |
| Wire range | 28~12AWG | 2.5mm ² |
| Wrth standing voltage | AC 2000V/1 Min | |

Mechanical

| | |
|--------------|--------------|
| Steip Length | 8-9mm |
| Temp.Range | -40°C~+105°C |

Dimensions

| | |
|-------|--------|
| Pitch | 7.62mm |
| Poles | 2-24p |

Material

| | |
|------------|--------------------------|
| Housing | PA66, UL94V-0 |
| Wire guard | Stainless steel |
| Clamp | Copper alloy, Tin plated |

| linear dimension(Tolerances Standard GB/T 14486-2008) | | | | | | | | | | | | ≡ | — | □ | // | ⊥ |
|---|-----------|--------------|---------------|---------------|---------------|---------------|----------------|-----------------|-----------------|-----------------|-------|-------|--------------|----------------|-------------|------|
| variable range | to 6 | over 6 to 10 | over 10 to 18 | over 18 to 30 | over 30 to 50 | over 50 to 80 | over 80 to 120 | over 120 to 160 | over 160 to 200 | over 200 to 250 | all | to 5 | over 5 to 30 | over 30 to 120 | over 120 to | |
| | tolerance | ±0.1 | ±0.14 | ±0.19 | ±0.25 | ±0.32 | ±0.43 | ±0.57 | ±0.72 | ±0.88 | ±1.05 | ±1.25 | 0.5 | 0.025 | 0.06 | 0.12 |

| | | | | | | | |
|---------------------------------|----|------|----|-------|-----|------------------------|---------------------|
| UNITS | mm | SIZE | A4 | SCALE | 2:1 | THIRD ANGLE PROJECTION | |
| CIXI WANJIE ELECTRONIC CO., LTD | | | | | | TITLE | WJ0701-01XX-1YY-00A |