

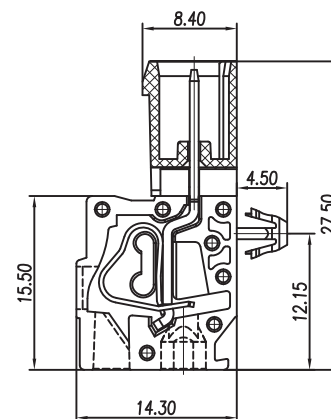
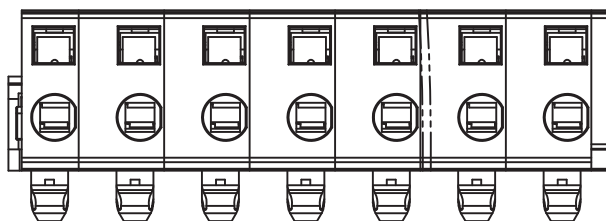


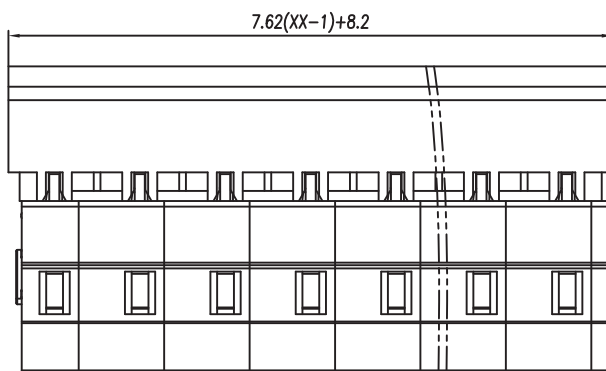

# CIXI WANJIE ELECTRONIC CO., LTD

THE SPEC SHEET

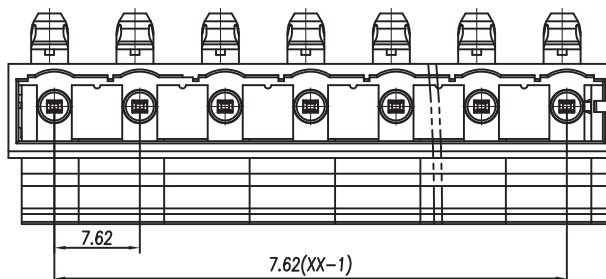

## Electrical

|                       |                |                    |
|-----------------------|----------------|--------------------|
| Standard              | UL             | IEC                |
| Rated voltage         | 300V           | 250V               |
| Rated current         | 15A            | 16A                |
| Contact resistance    | 20mΩ           |                    |
| Insulation resistance | 500MΩ/DC500V   |                    |
| Wire range            | 28~12AWG       | 2.5mm <sup>2</sup> |
| Wrth standing voltage | AC 2000V/1 Min |                    |

## Mechanical

|              |              |
|--------------|--------------|
| Steip Length | 8-9mm        |
| Temp.Range   | -40°C~+105°C |

## Dimensions

|       |        |
|-------|--------|
| Pitch | 7.62mm |
| Poles | 2-24p  |

## Material

|            |                        |
|------------|------------------------|
| Housing    | PA66, UL94V-0          |
| Wire guard | Stainless steel        |
| Clamp      | Red copper, Tin plated |

| UNITS                                                                                                                 | mm | SIZE | A4 | SCALE | 1.5:1 | THIRD ANGLE PROJECTION |                     |
|-----------------------------------------------------------------------------------------------------------------------|----|------|----|-------|-------|------------------------|---------------------|
|  CIXI WANJIE ELECTRONIC CO., LTD |    |      |    |       |       | TITLE                  | WJ0703-02XX-1YY-00A |