

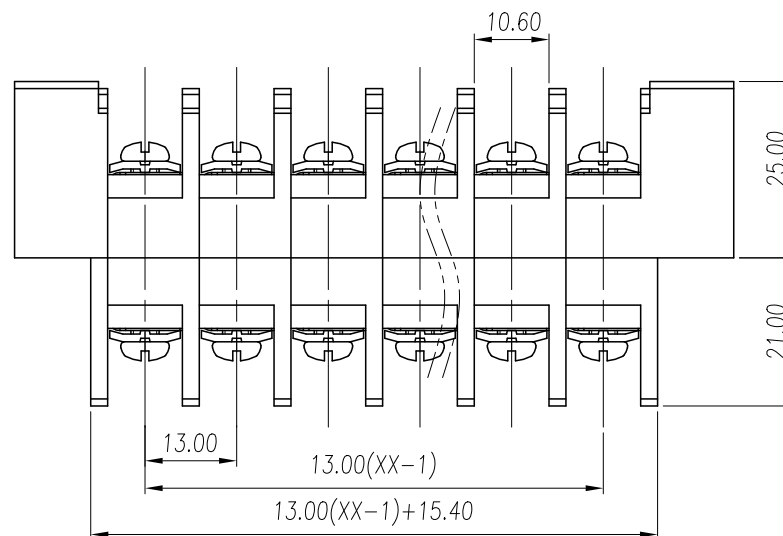
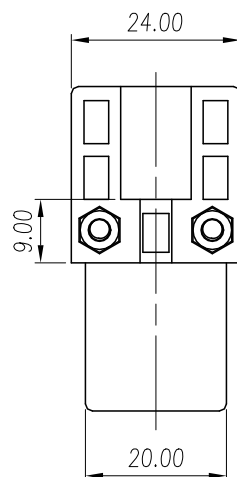


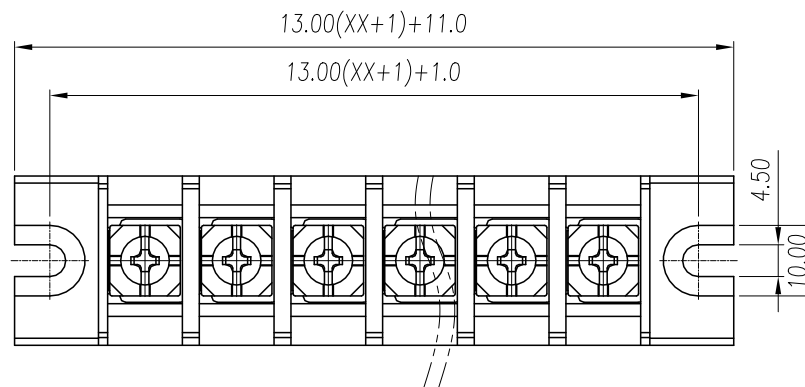

CIXI WANJIE ELECTRONIC CO., LTD

REVISION RECORD

REV.	DESCRIPTION	ECN No.	APPROVED	DATE

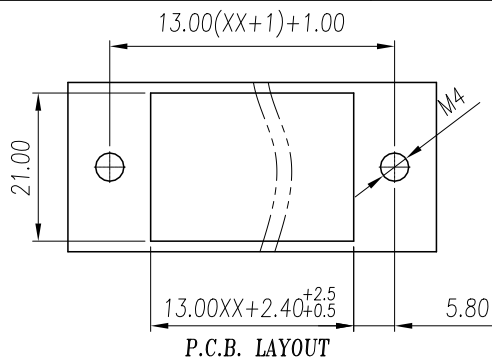

Electrical

Standard	UL
Rated voltage	600V
Rated current	50A
Contact resistance	20mΩ
Insulation resistance	1000MΩ/DC500V
Wire range	22~8AWG
Wrth standing voltage	AC 2200V/1 Min

Mechanical

Torque	1.2Nm/10.6lb.in/12.24Kgf.cm
Temp.Range	-40°C~+130°C
MAX Soldering	+260°C, for 5 Sec

Dimensions

Pitch	13mm
/Poles	01~15P

Material

Housing	PBT, UL94V-0
Screws	M4 Steel Ni plated
Pin header	Copper alloy Sn plated

linear dimension(Tolerances Standard GB/T 14486-2008)

variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to 250	over 250 to 500	over 500 to 1000
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30

UNITS	mm	SIZE	A4	SCALE	1:1	THIRD ANGLE PROJECTION	REV	V0
						TITLE	WJ10-13.0-XXP-1YY-00A	