




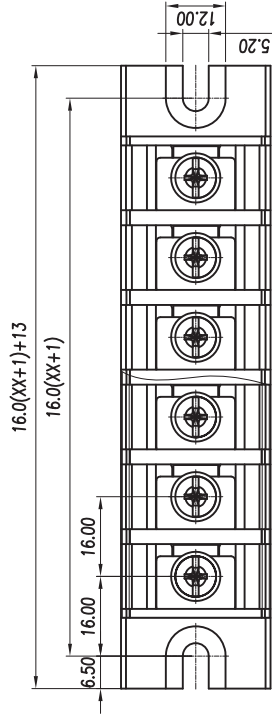

CIXI WANJIE ELECTRONIC CO., LTD

THE SPEC SHEET

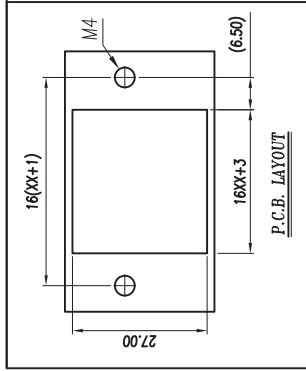

Electrical

Standard	UL
Rated voltage	600V
Rated current	65A
Contact resistance	20mΩ
Insulation resistance	1000MΩ /DC500V
Wire range	14~6AWG
Wrth standing voltage	AC 2500V/1 Min

Mechanical




Torque	2.5Nm/25.0lb.in
Temp.Range	-40°C~+130°C
MAX Soldering	+250°C, for 5 Sec

Dimensions

Pitch	16mm
Poles	01~15P

Material

Housing	PBT, UL94V-0
Screws	M5 Steel Ni plated
Pin header	Copper alloy Sn plated

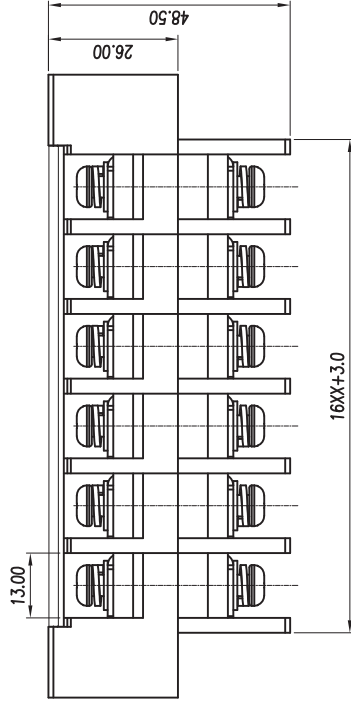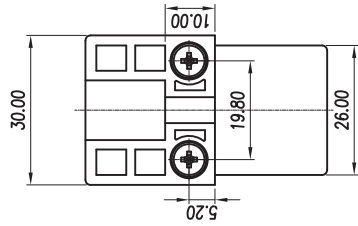

		linear dimension(Tolerances Standard GB/T 14486-2008)											
variable range	tolerance	over	to	over	to	over	to	over	to	over	to	over	to
		6	10	18	30	50	80	120	160	200	250	5	30
±0.1	±0.14	±0.19	±0.25	±0.32	±0.43	±0.57	±0.72	±0.88	±1.05	±1.25	0.5	0.025	0.12
												0.06	0.4

UNITS	mm	SIZE	A4	SCALE	THIRD ANGLE PROJECTION	
CIXI WANJIE ELECTRONIC CO., LTD					WJ10C-16.0-XXP-1YY-00A	