







CIXI WANJIE ELECTRONIC CO., LTD

REVISION RECORD

REV.	DESCRIPTION	ECN No.	APPROVED	DATE

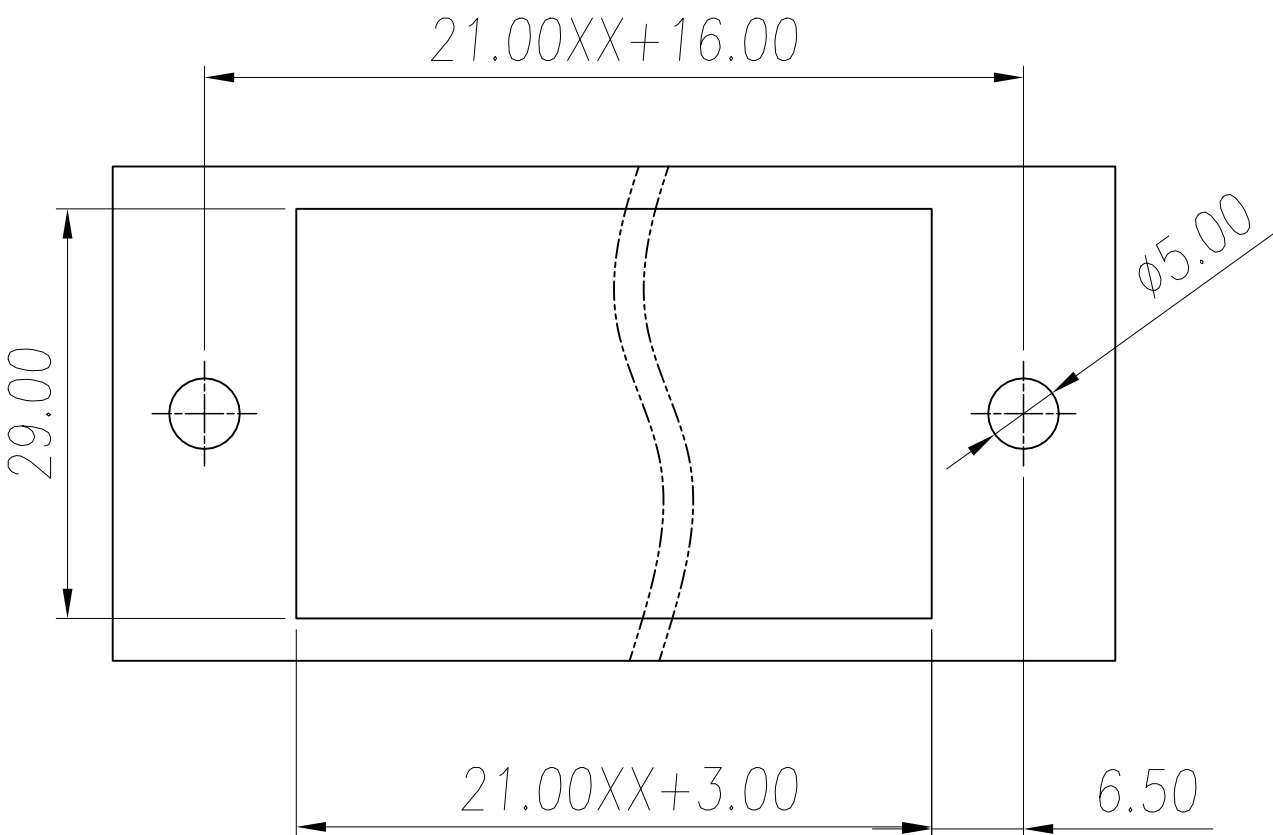

P.C.B. LAYOUT

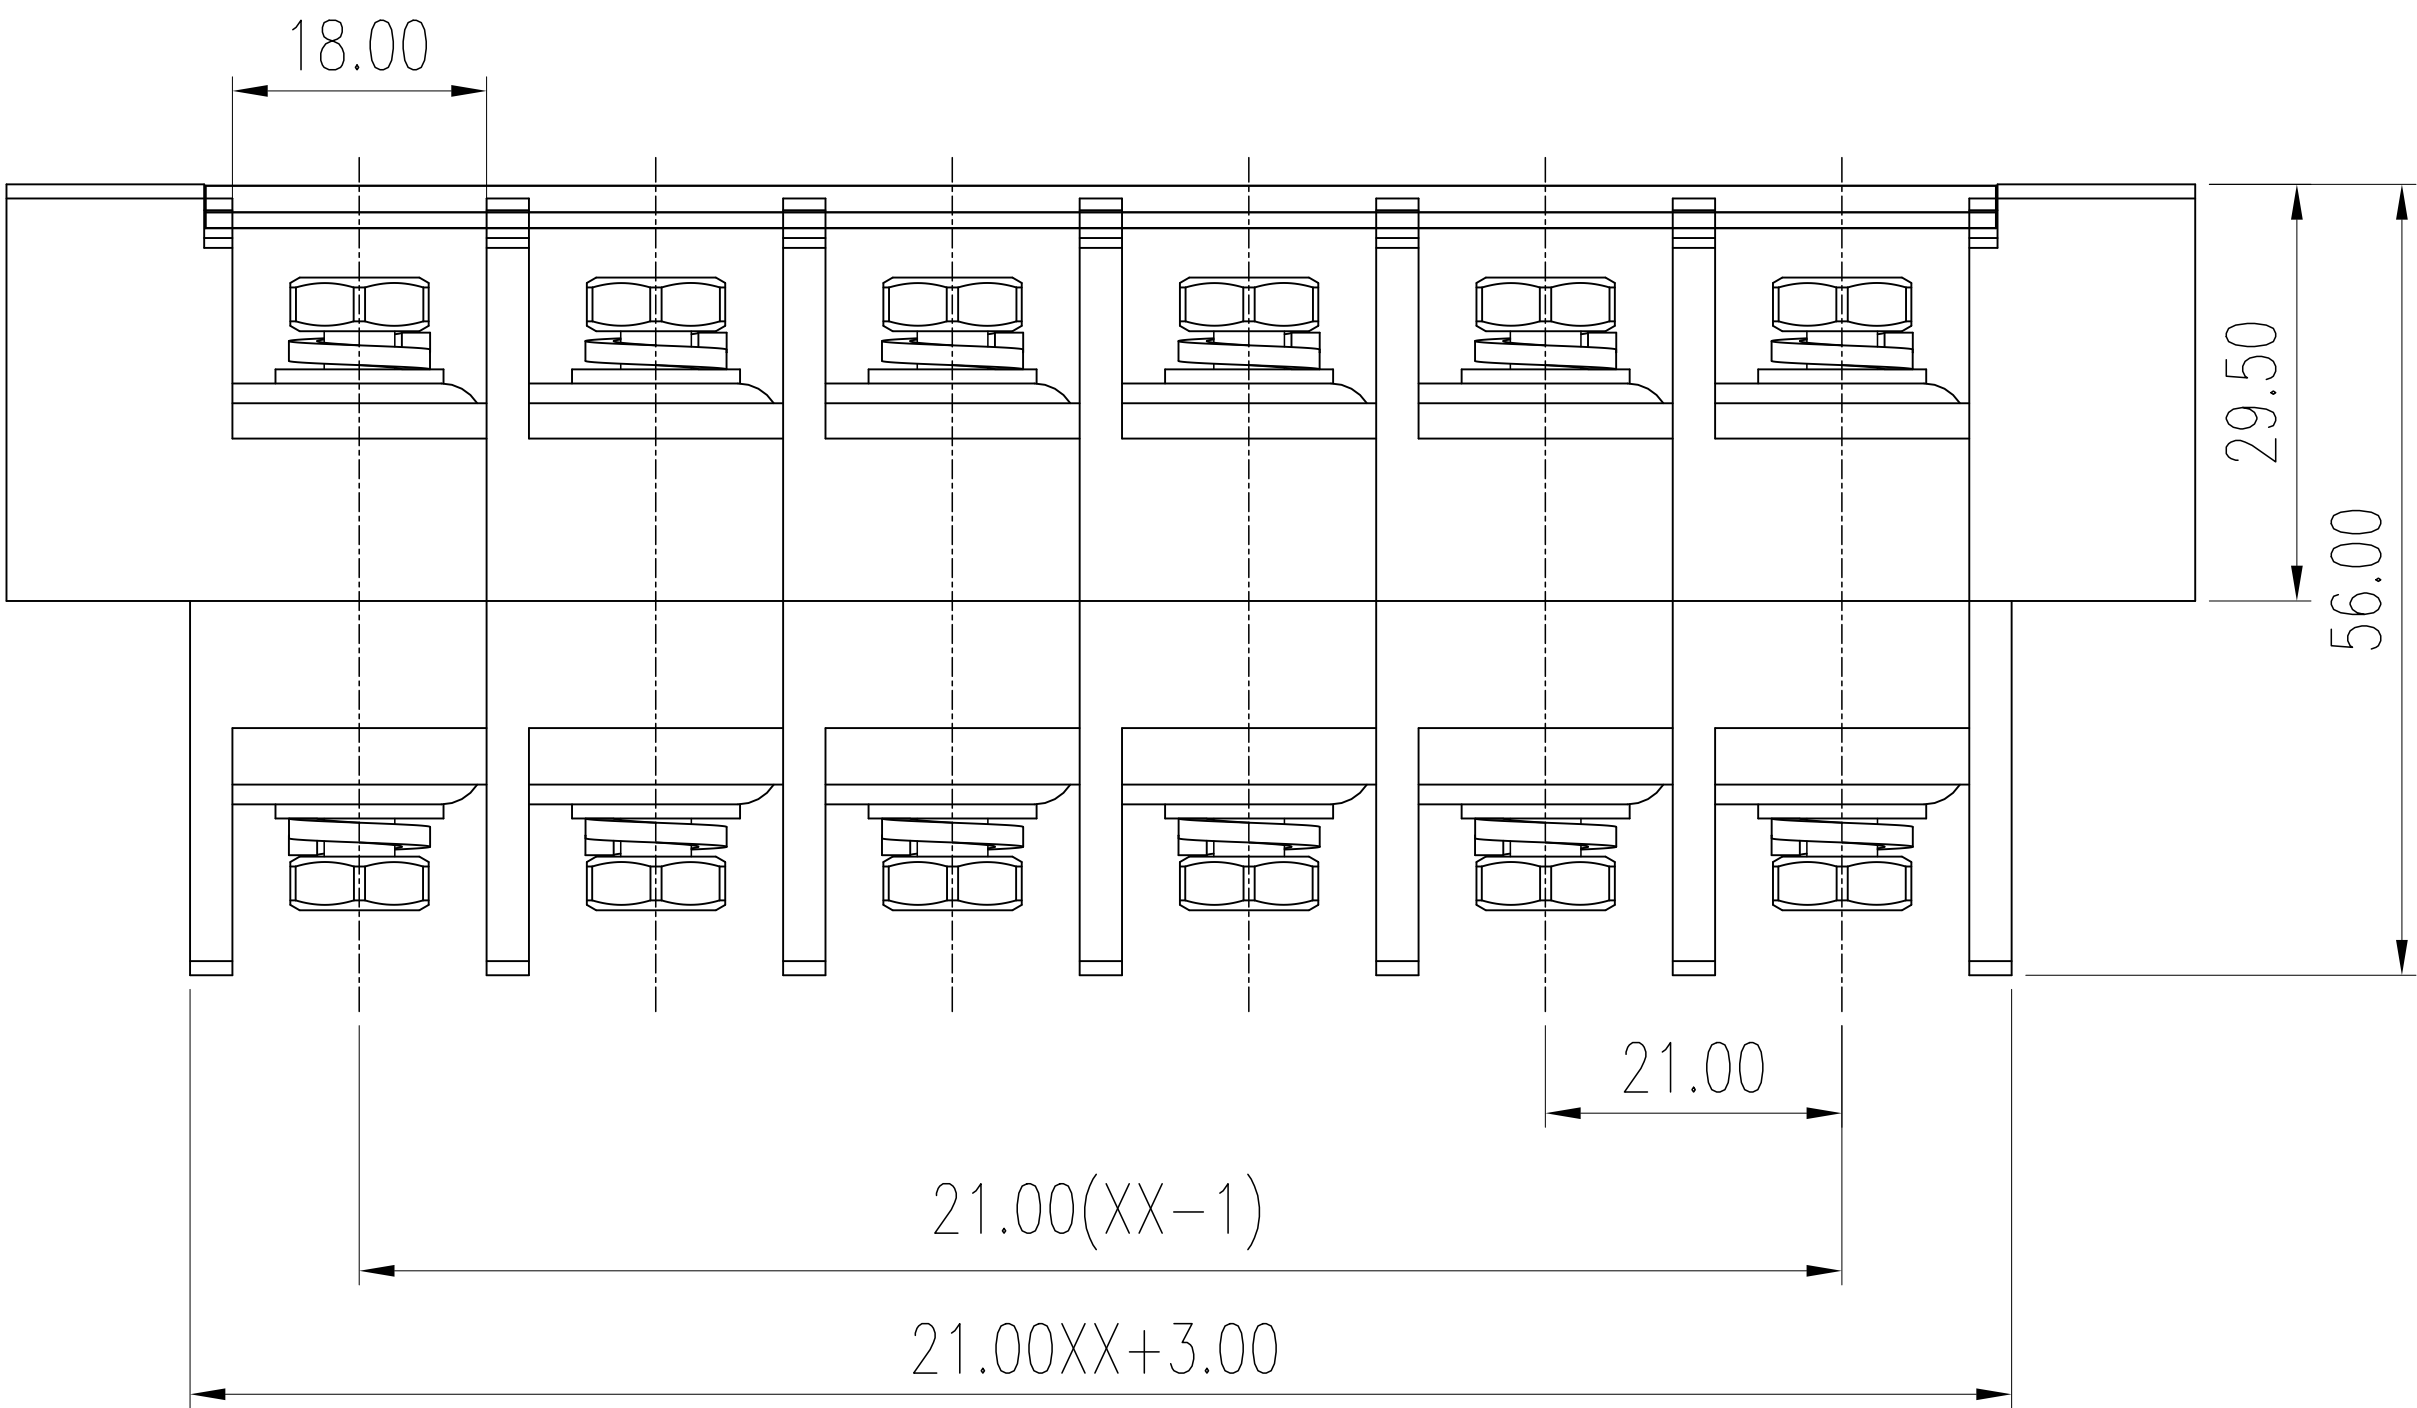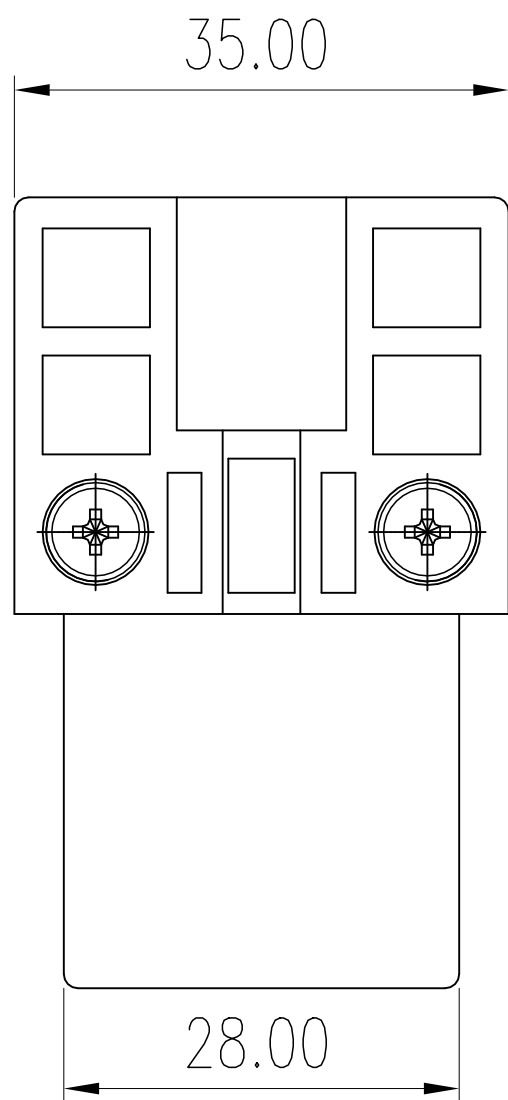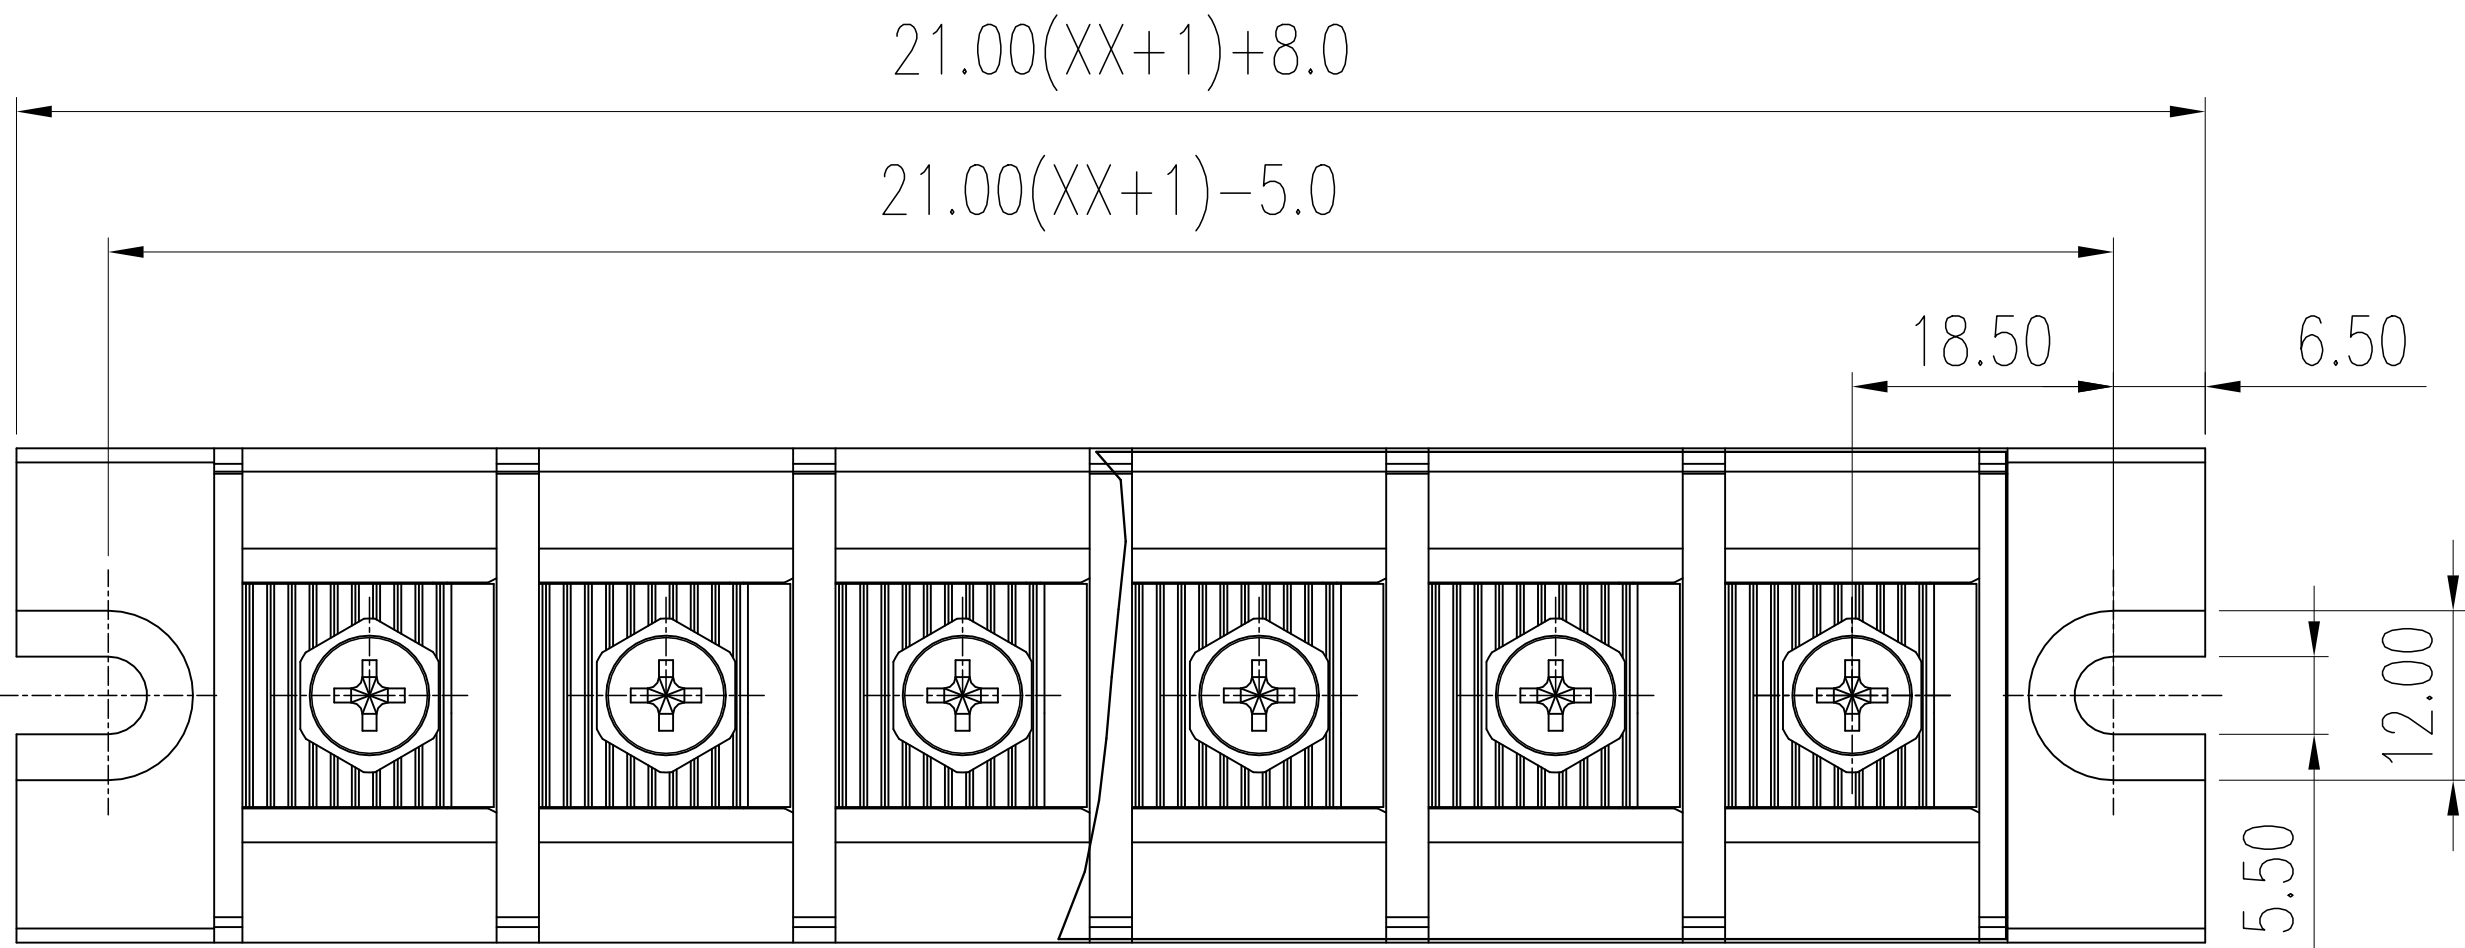

Standard	UL
Rated voltage	600V
Rated current	115A
Contact resistance	20mΩ
Insulation resistance	1000MΩ/DC500V
Wire range	8~2AWG
Wrth standing voltage	AC 2200V/1 Min
Mechanical	
Torque	3.0Nm
Temp.Range	-40°C~+130°C
/MAX Soldering	+260°C, for 5 Sec
Dimensions	
Pitch	21.0mm
/Poles	01~15P
Material	
Housing	PBT, UL94V-0
Screws	M6 Steel Zn plated
Pin header	Copper alloy Sn plated

linear dimension(Tolerances Standard GB/T 14486-2008)								—	▤	⊥
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

UNITS	mm	SIZE	A4	/	2:3	/THIRD ANGLE PROJECTION		REV	V0
CIXI WANJIE ELECTRONIC CO., LTD						TITLE	WJ10C-21.0-XXP-1YY-00A		