

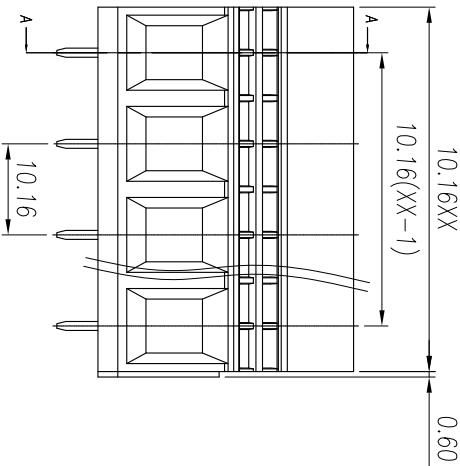
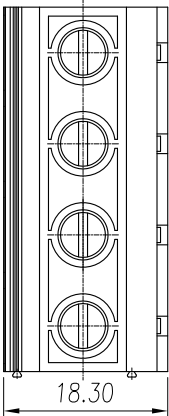


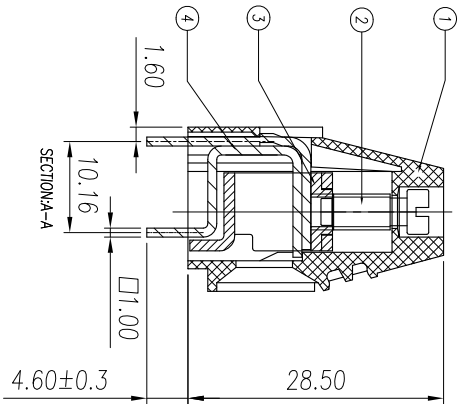

CIXI WANJIE ELECTRONIC CO., LTD

THE SPEC SHEET

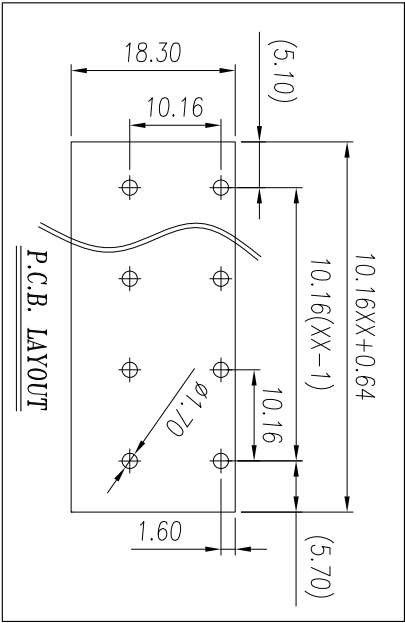

Electrical

Standard	UL	IEC
Rated voltage	600V	650V
Rated current	65A	57A
Contact resistance	20mΩ	
Insulation resistance	500MΩ /DC500V	
Wire range	20~6AWG	16mm²
With standing voltage	AC 2500V/1 Min	

Mechanical

Torque	1.8Nm(15.6Lb.in)
Strip length:	10~11mm
Temp. Range	-40°C~+105°C
MAX Soldering	+250°C, for 5 Sec

Dimensions

Pitch	10.16mm
Poles	2~18P

Material

Housing	PA66, UL94V-0
Screws	M4.0 Steel Zn plated
Pin header	Copper alloy Tin plated
Cage	Steel Zn plated

linear dimension(Tolerances Standard GB/T 14486-2008)											
	over 6	over 10	over 18	over 30	over 50	over 80	over 120	over 160	over 200	over 250	
variable range	to 6	to 10	to 18	to 30	to 50	to 80	to 120	to 160	to 200	to 250	all
tolerance	±0.1	±0.14	±0.19	±0.25	±0.32	±0.43	±0.57	±0.72	±0.88	±1.05	±1.25

UNITS	mm	SIZE	A4	SCALE	1:2.1	THIRD ANGLE PROJECTION	
						TITLE	WJ16W-10.16-XP-1Y-00A