



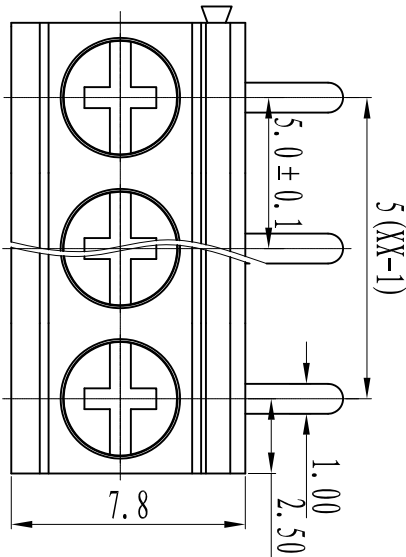

CIXI WANJIE ELECTRONIC CO., LTD



THE SPEC SHEET

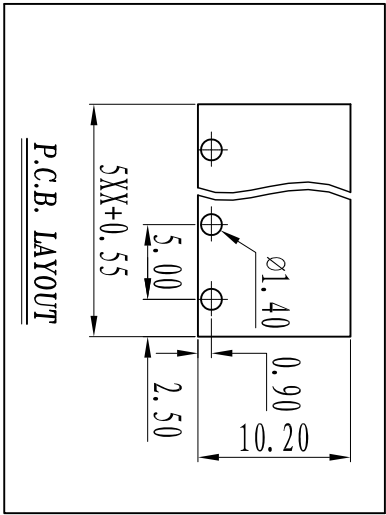

Electrical

Standard	UL	IEC
Rated voltage	300V	250V
Rated current	8A	15A
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Wire range	26~14AWG	1.5mm²
With standing voltage	AC 2000V/1 Min	

Mechanical

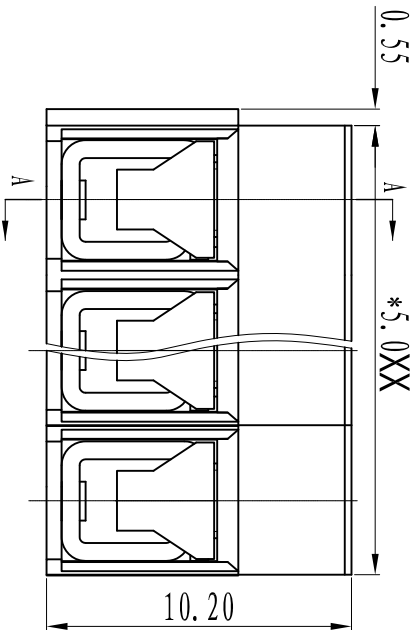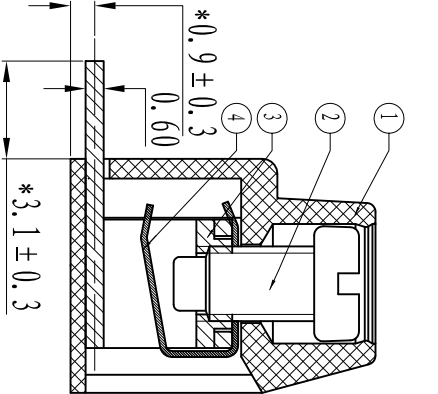

Torque 3 Kgf·cm

Temp.Range -40°C~+105°C

MAX Soldering +250°C, for 5 Sec

Steip Length 6-7mm

Dimensions

Pitch 5.0mm

Poles 2~24p

Material

Housing	PA66, UL94V-0
Screws	M2.5 Steel Zn plated
Pin header	Brass ,Tin plated
Shrapnel	Phosphor bronze,Ni plated

linear dimension(Tolerances Standard GB/T 14486-2008)													≡	—	□	//	⊥
variable range	to	over	to	over	to	over	to	over	to	over	to	over	all	to	over	to	over
	6	10	18	30	50	80	120	160	200	250	5	30					
tolerance	±0.1	±0.14	±0.19	±0.25	±0.32	±0.43	±0.57	±0.72	±0.88	±1.05	±1.25	0.5	0.025	0.06	0.12	0.4	



CIXI WANJIE ELECTRONIC CO., LTD

TITLE WJ126R-5.0-XXP-1YY-00A

