
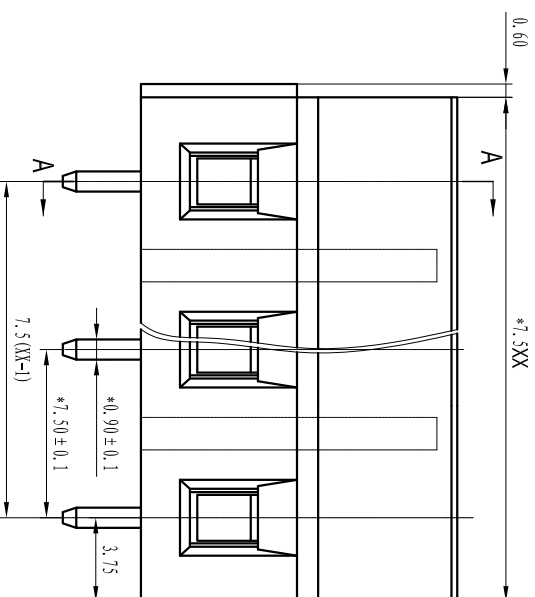
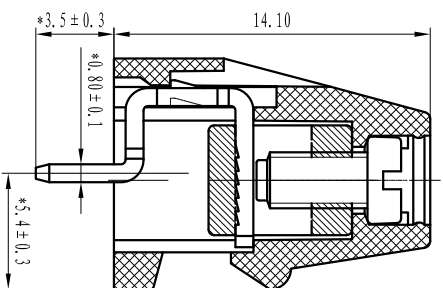
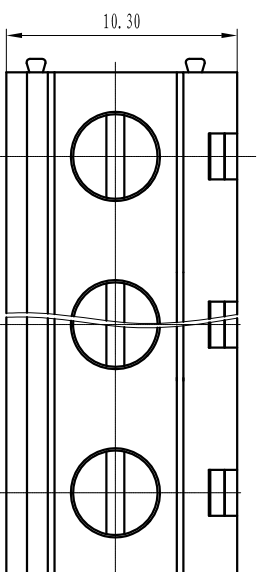


CIXI WANJIE ELECTRONIC CO., LTD

THE SPEC SHEET

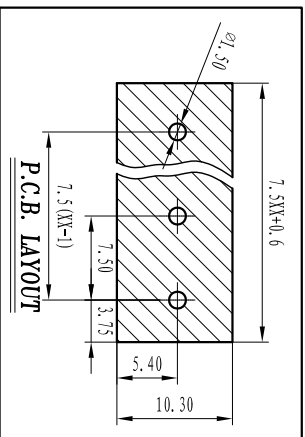

Electrical

Standard	UL	IEC
Rated voltage	300V	450V
Rated current	16A	20A
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Wire range	22~12AWG	2.5mm ²
With standing voltage	AC 2000V/1 Min	

Mechanical

Torque	0.4Nm(3.6lb.in)
Strip Length	6-7mm
Temp.Range	-40°C~+105°C
MAX Soldering	+250°C, for 5 Sec

Dimensions

Pitch	7.5mm
Poles	2~24p

Material

Part	Material
Housing	PA66, UL94V-0
Screws	M2.5 Steel Zn plated
Pin header	Brass, Tin plated
Cage	Brass, Ni plated

		linear dimension (Tolerances Standard GB/T 14486-2008)										$\equiv$	$\square$	$\parallel$	$\perp$		
		over 6 to 10	over 10 to 18	over 18 to 30	over 30 to 50	over 50 to 80	over 80 to 120	over 120 to 160	over 160 to 200	over 200 to 250	all	over 5 to 30	over 30 to 120	over 120 to 250			
variable range		6 to 10	10 to 18	18 to 30	30 to 50	50 to 80	80 to 120	120 to 160	160 to 200	200 to 250	all	5 to 30	30 to 120	120 to 250			
tolerance		± 0.1	± 0.14	± 0.19	± 0.25	± 0.32	± 0.43	± 0.57	± 0.72	± 0.88	± 1.05	± 1.25	0.5	0.025	0.06	0.12	0.4

UNITS	mm	SIZE	A4	SCALE	3:1	THIRD ANGLE PROJECTION 
 CXI WANJIE ELECTRONIC CO., LTD					TITLE WJ128-7.5-XXP-1YY-00A	