

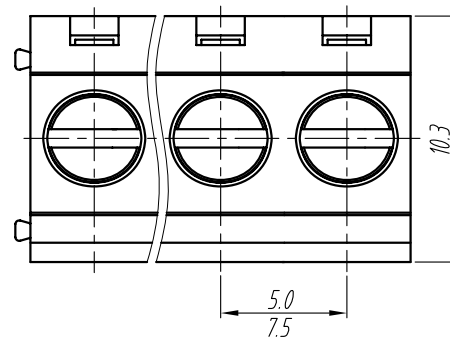


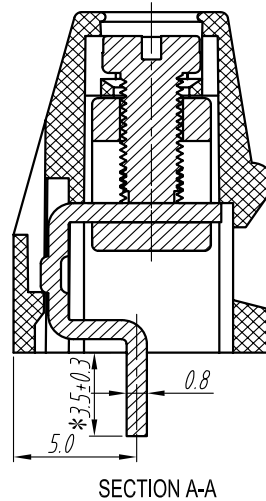


CIXI WANJIE ELECTRONIC CO., LTD

product specification

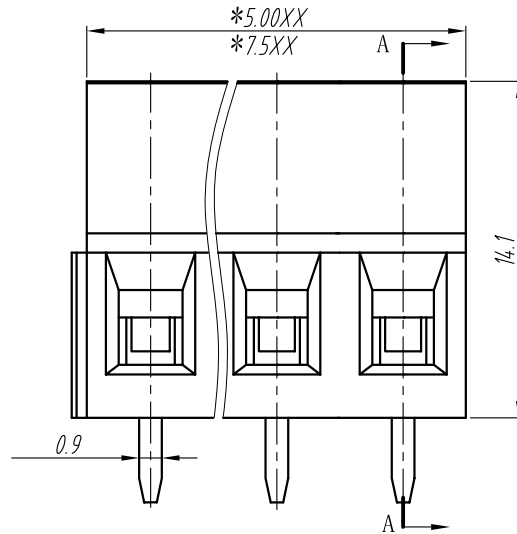

P.C.B.LAYOUT



Electrical

Standard	UL	IEC
Rated voltage	300V	250V
Rated current	10A	18A
Contact resistance	20mΩ	
Insulation resistance	5000MΩ/DC1000V	
Wire range	22-14 A WG 2.5mm ²	
Withstanding voltage	AC 2000V/1 Min	

Mechanical

Temp.Range	-40℃ ~+105℃
MAX Soldering	+250℃ for 5 Sec
Torque	0.4Nm(3.6lb.in)
Strip length	6-7mm

Dimensions

Pitch	5.0mm 7.5mm
Poles	2p. xxp

Material

Housing	PA66,UL94V-0
Screws	M2.5 steel Zinc plated
Pin housing	Brass,Tin plated
Clamp	Brass, Ni plated

TOLERANCES EXCEPT AS NOTED

	linear dimension					fillet	chamfer	short angle sid				≡	—	□	//	⊥
	variable	range	to	over	over	all	to	to	to	to	to	all	to	over	over	over
	6	to 6	30	to 120	to 480	±0.2	±0.5	±1	1°	30'	20'	10'	0.5	0.025	0.06	0.12
tolerance	±0.1	±0.2	±0.3	±0.5	±0.9	±0.2	±0.5	±1	1°	30'	20'	10'	0.5	0.025	0.06	0.12

UNITS


mm

SIZE

A4

SCALE

FIRST ANGLE PROJECTION



CIXI WANJIE ELECTRONIC CO., LTD

NAME

WJ128-5.0
WJ128-7.5