
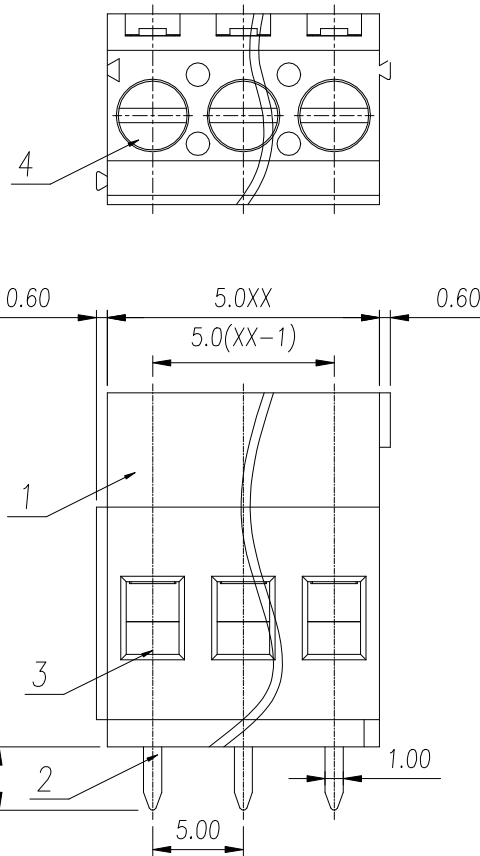
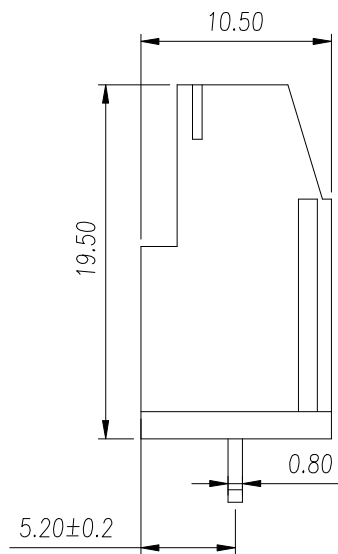


Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicit authorization is granted. Violations will be liable for compensation. All rights reserved for patent, utility model or designs registrations.

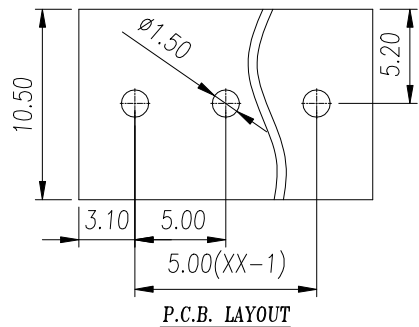

General Tolerances										
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to 10	over 10 to 100	over 100 to 100	
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

4	Screw	Steel	M3/Zn Plated	DES.	CY	DATE	24.02.21	UNITS	mm	THIRD ANGLE PROJECTION		
3	Cage	Copper Alloy	M3/Ni Plated	CHK.	YangHJ	DATE	24.02.21	SIZE	A4	TYPE: CUSTOMER DRAWING		SHEET 1 of 1
2	Header Pin	Copper Alloy	Sn Plated	APP.	JASON	DATE	24.02.21	SCALE	2.5:1	DRAWING TYPE: SP-03		REV V0
1	Housing	PA66	UL94V-0	CIXI WANJIE ELECTRONIC CO., LTD						PART NO.: WJ129-5.0-XXP-14-02A		
ITEM	NAME OF PART	MATERIAL	NOTES									

REVISION RECORD				
REV.	DESCRIPTION	ECN No.	APPROVED	DATE
V0	新发行		CY	24.02.21

UL/CUL				
UL/CUL Technical Data				
Use Group		B	C	D
Rated Voltage [V]		300	-	300
Rated Current [A]		20	-	10
Wire Range Solid/Stranded [AWG]		26-12		
Withstanding Voltage		1600V/1Min		
IEC				
IEC Technical Data				
Overvoltage Category		III	III	II
Contamination Class		3	2	2
Rated Voltage [V]		250	400	630
Rated Current [A]		24	24	24
Impulse withstand voltage [KV]		4.0	4.0	4.0
Conductor cross section Solid/ flexible [mm²]		0.5-2.5		
Other Data				
Pitch / Poles [mm] / [P]		5.0 / 02~24		
Stripping Length [mm]		6~7		
Screw/ Torque(Max) [N.m]		M3/0.5		
Operating temperature [°C]		-40~105		
Soldering temperature		260°C/5S		