



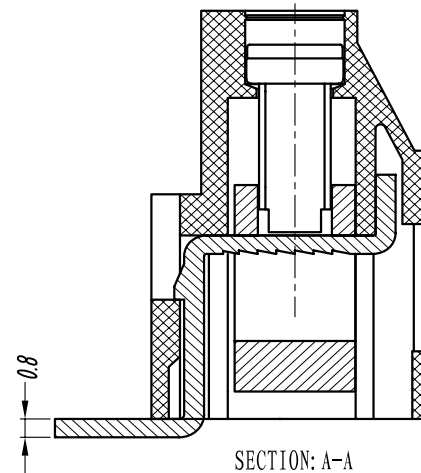


CIXI WANJIE ELECTRONIC CO., LTD

product specification

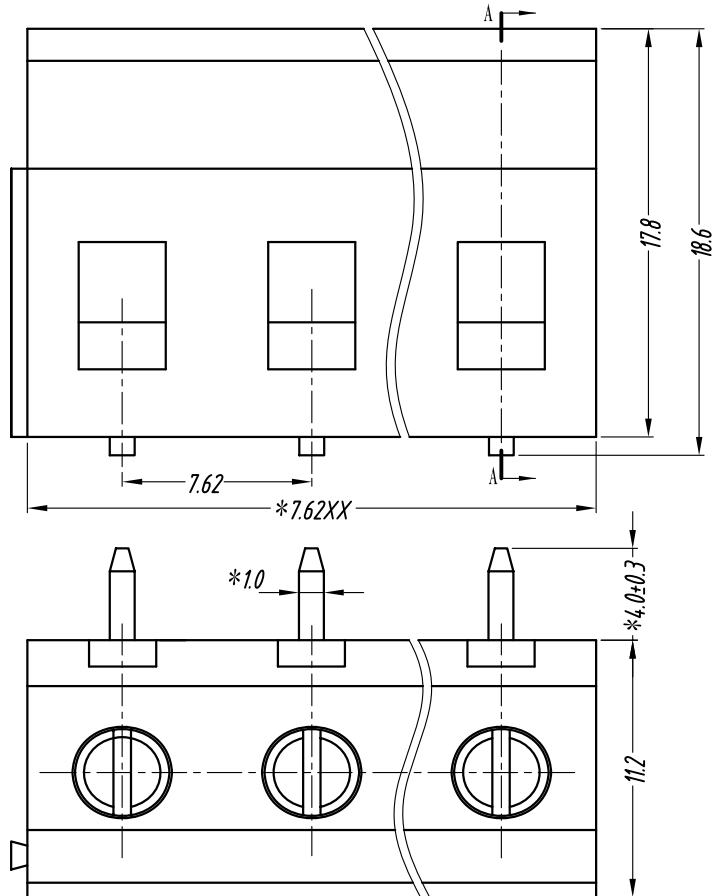

P. C. B. LAYOUT

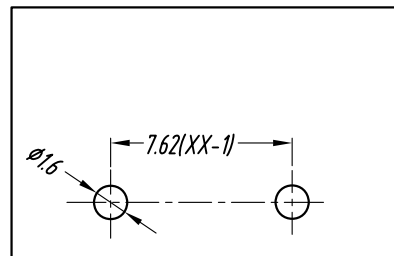

Electrical

Standard	UL	IEC
Rated voltage	300V	250V
Rated current	16A	25A
Contact resistance	20mΩ	
Insulation resistance	5000MΩ/DC1000 V	
Wire range	24-12A WG 4.0mm ²	
Withstanding voltage	AC 2000V/1 Min	

Mechanical

Temp.Range	-40℃~+105℃
MAX Soldering	+250℃ for 5 Sec
Torque	0.5Nm(4.5lb.in)
Strip length	6-7mm

Dimensions

Pitch	7.62mm
Poles	2p. xxp

Material

Housing	PA66,UL94V-0
Screws	M3 steel Zinc plated
Pin housing	Brass,Tin plated
Clamp	Brass, Ni plated

TOLERANCES EXCEPT AS NOTED

	linear dimension					fillet	chamfer			short angle sid			≡	—			
variable range	to 6	over 6 to 30	over 30 to 120	over 120 to 480	over 480 to	all	to 6	over 6 to 10	over 10 to 50	over 50 to 120	over 120 to	all	to 5	over 5 to 30	over 30 to 120	over 120 to	
tolerance	±0.1	±0.2	±0.3	±0.5	±0.9	±0.2	±0.5	±1	1°	30′	20′	10′	0.5	0.025	0.06	0.12	0.4

UNITS


mm

SIZE

A4

SCALE

FIRST ANGLE PROJECTION



CIXI WANJIE ELECTRONIC CO., LTD

NAME

WJ129R-7.62