



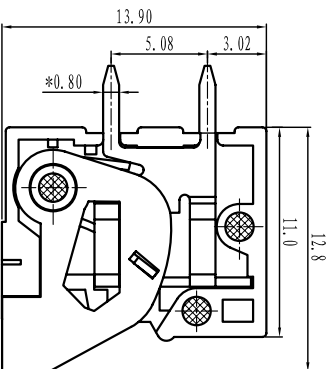



SHUIYUANPU (R)

CIXI WANJIE ELECTRONIC CO., LTD


product specification



SECTION A-A

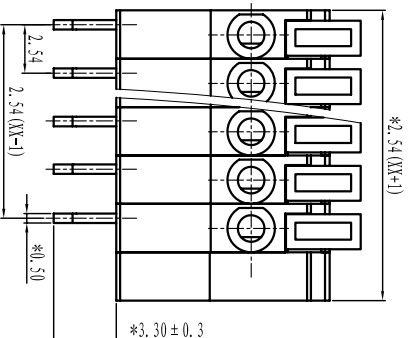

HOW TO ORDER

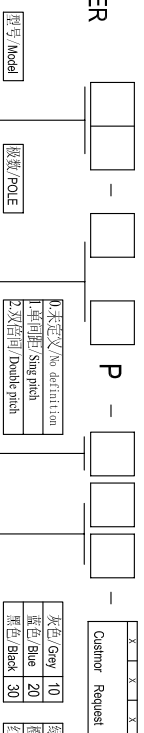

0 未定义/No definition
1 单间距/Single pitch
2 双间距/Double pitch

灰色/Grey 10
蓝色/Blue 20
黑色/Black 30
绿色/Green 40
棕色/Orange 50
红色/Red 60
透明/Transparent 70
黄色/Yellow 80
白色/White 90

| | linear dimension | fillet | chamfer | short angle sid | | | |
|----------------|------------------|-----------------|--------------|-----------------|---------------|----------------|--------------|
| variable range | over 6 to 30 | over 120 to 480 | all to 6 | over 6 to 10 | over 10 to 50 | over 50 to 120 | all to 5 |
| tolerance | ±0.1 to ±0.2 | ±0.3 to ±0.5 | ±0.9 to ±0.2 | ±0.5 to ±1 | 1° to 30' | 20' to 10' | 0.5 to 0.025 |
| | | | | | | | 0.06 to 0.12 |
| | | | | | | | 0.4 |

TOLERANCES EXCEPT AS NOTED

Electrical
 Standard: UL TEC
 Rated voltage: 150V 130V
 Rated current: 2A 6A
 Wire range: 26-20AWG 0.5mm²
 Withstanding voltage: AC2000V/1Min
 Insulation resistance: 500M Ω /DC1000V

Mechanical
 Temp Range: -40° C ~ +105° C
 MAX Soldering: +250° C, for 5 Sec
 Strip length: 11mm

Dimensions

Pitch: 2.54mm
 Poles: 1P-XYP

Material

Housing: PA66, UL94V-0
 Wire guard: Stainless steel(SUS301)
 Pin header: Brass, Tin plated

| UNITS | mm | SIZE | A4 | SCALE | FIRST ANGLE PROJECTION |
|---------------------------------|----|------|----|-------|--|
| | | | | | |
| CIXI WANJIE ELECTRONIC CO., LTD | | | | | NAME WJ141R-2.54-XYP-11Y-00A |