

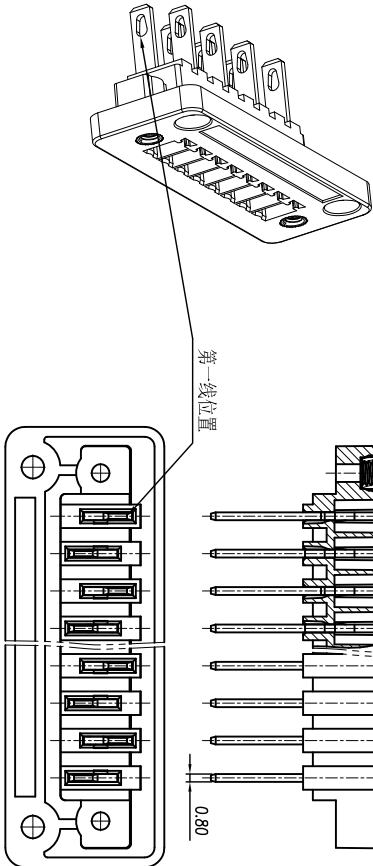

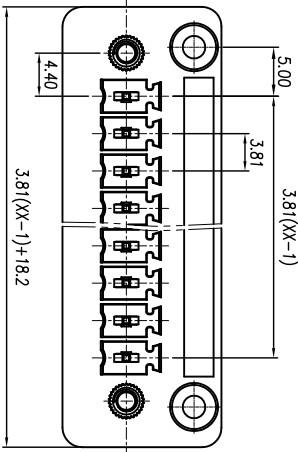


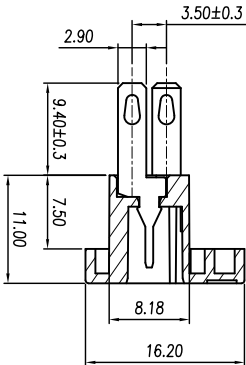

CIXI WANJIE ELECTRONIC CO., LTD

THE SPEC SHEET

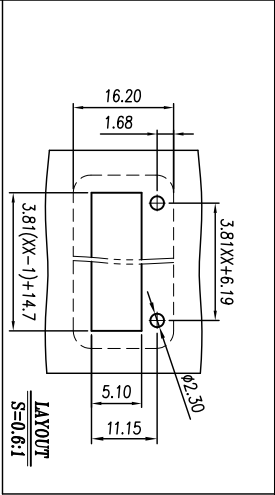

Electrical

Standard	UL	IEC
Rated voltage	300V	250V
Rated current	8A	10A
Contact resistance	20mΩ	
Insulation resistance	500MΩ /DC500V	
Wrth standing voltage	AC 2000V/1 Min	

Mechanical

MAX Soldering	+250°C for 5 Sec
Temp.Range	-40°C~+105°C

Dimensions

Pitch	3.81mm
Poles	2-24p

Material

Housing	PA66, UL94V-0
Nut	M2.5, Brass
Pin header	Brass, Tin plated

linear dimension(Tolerances Standard GB/T 14486-2008)										≡	—	□	//	⊥
variable range	to	over	to	over	to	over	to	over	to	over	to	over	to	over
	6	6	10	10	18	30	50	80	120	160	200	250	all	over
tolerance	±0.1	±0.14	±0.19	±0.25	±0.32	±0.43	±0.57	±0.72	±0.88	±1.05	±1.25	0.5	0.025	0.06



CIXI WANJIE ELECTRONIC CO., LTD

TITLE

WJ1502GM-3.81-XP-1Y-00A

THIRD ANGLE PROJECTION

