







CIXI WANJIE ELECTRONIC CO., LTD

REVISION RECORD

REV.	DESCRIPTION	ECN No.	APPROVED	DATE

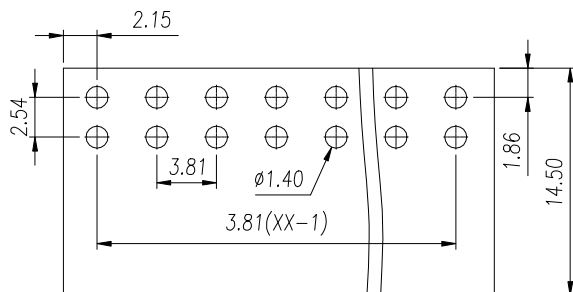

P.C.B. LAYOUT

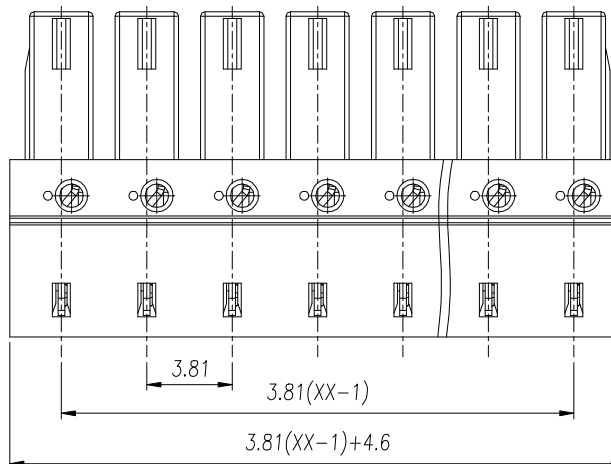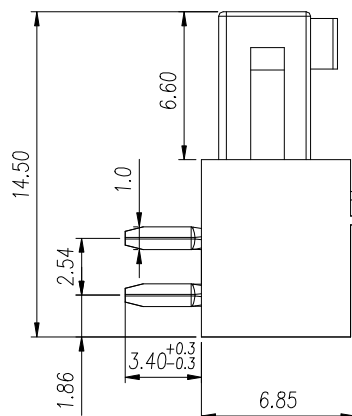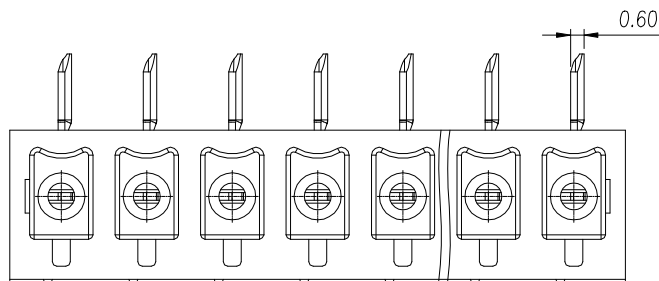

UL/CUL Technical Data		c  us		
Use Group		B	C	D
Rated Voltage	[V]	300	-	300
Rated Current	[A]	8	-	8
Wire Range		-		
Solid/Stranded	[AWG]			
Withstanding Voltage		1600V/1Min		
IEC Technical Data		IEC61984		
Overvoltage Category		III	III	II
Contamination Class		3	2	2
Rated Voltage	[V]	160	160	320
Rated Current	[A]	7	7	7
Impulse withstand voltage	[KV]	2.5	2.5	2.5
Conductor cross section		-		
Solid/ flexible	[mm²]			
Material				
Insulation Material		PA66		
Imflamability		UL94V-0		
Contactor Material		Copper alloy		
Contactive Coating		Sn Plated		
Other Data				
Pitch / Poles	[mm] / [P]	3.81 / 02~24		
Stripping Length		[mm]		
Screw/ Torque(Max)	[N.m]	-		
Operating temperature		[°C]		
Soldering temperature		260°C/5S		
Pin Dimensions		[mm]		
PCB Hole Diameter		[mm]		

linear dimension(Tolerances Standard GB/T 14486-2008)




variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to 100	over 10 to 100	over 100 to 100
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30

UNITS mm

SIZE A4

SCALE 3:1

/THIRD ANGLE PROJECTION



REV V0



CIXI WANJIE ELECTRONIC CO., LTD

TITLE

WJ15EDGA-3.81-XXP-1YY-00A