
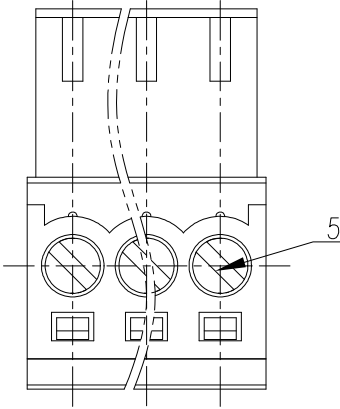
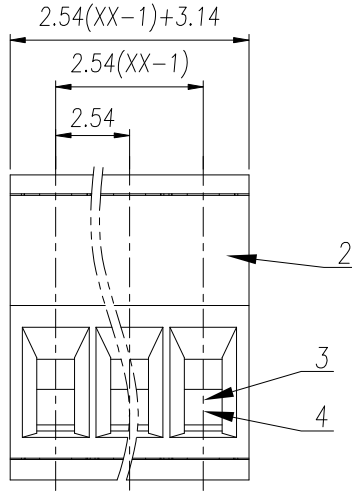


Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicit authorization is granted. Violations will be liable for compensation. All rights reserved for patent, utility model or designs registrations. 除非给予明确授权，否则禁止转让、复制、利用、交流本文件的内容。侵犯者将承担法律责任。本公司保留对涉及发明、实用新型和外观设计的所有权利。

General Tolerances										
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

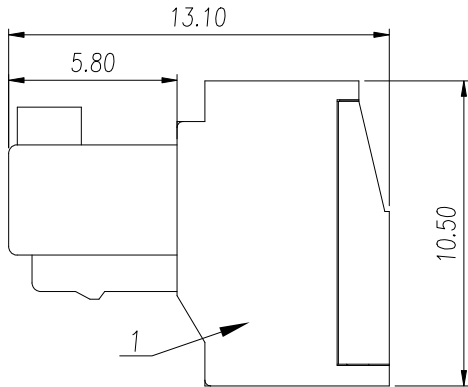

5	Screw	Steel	M1.6/Zn Plated
4	Cage	Copper Alloy	M1.6/Ni Plated
3	Clamp	Copper Alloy	Sn Plated
2	Cover	PA66	UL94V-0
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

DES.	YuCZ	DATE	23.11.24	UNITS	mm	THIRD ANGLE PROJECTION	
CHK.	YangHJ	DATE	23.11.24	SIZE	A4	TYPE: CUSTOMER DRAWING	SHEET 1 of 1
APP.	JASON	DATE	23.11.24	SCALE	4:1	DRAWING TYPE: SP-03	REV V0
CXI WANJIE ELECTRONIC CO., LTD						PART NO.: WJ15EDGK-2.54-XXP-1Y-00A	

REVISION RECORD				
REV.	DESCRIPTION	ECN No.	APPROVED	DATE
V0	新发行		YuCZ	23.11.24

UL/CUL		Technical Data				
Use Group		B	C	D		
Rated Voltage [V]		150	-	-		
Rated Current [A]		5	-	-		
Wire Range Solid/Stranded [AWG]		26-20				
Withstanding Voltage		1300V/1Min				
IEC		IEC61984				
IEC Technical Data						
Overvoltage Category		III	III	II		
Contamination Class		3	2	2		
Rated Voltage [V]		100	160	320		
Rated Current [A]		5	5	5		
Impulse withstand voltage [KV]		1.5	2.5	2.5		
Conductor cross section Solid/ flexible [mm²]		0.2-0.5				
Other Data						
Pitch [mm]		2.54				
Poles [P]		02~24				
Stripping Length [mm]		5-6				
Screw		M1.6				
Torque(Max) [N.m]		0.1				
Operating temperature [°C]		-40~105				
符合RoHS环保要求						

1

2

3

4

5

6

1

2

3

4

5

FOR-0371 Rev.1.0