





CIXI WANJIE ELECTRONIC CO., LTD

product specification

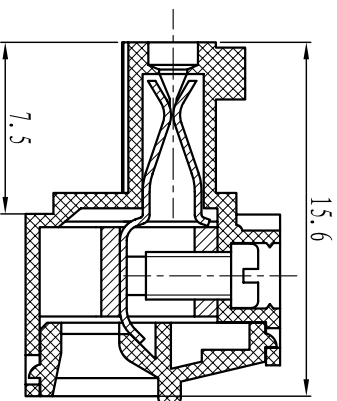

SECTION A-A

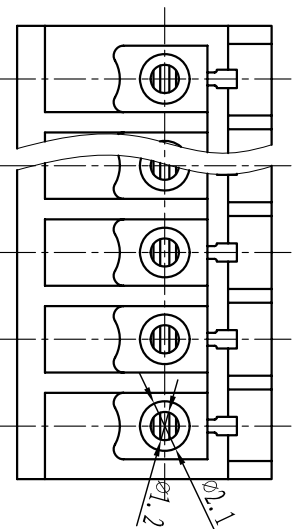

Material

Housing: PA66, UL94V-0

Screws: M2, steel Zinc plated

Wire guard: Brass, Ni plated

Clamp: Phosphor bronze, Ni plated

Pitch: 3.81mm/3.5mm

Notes: 2P-24P

Dimensions

Strip length: 6–7 mm

Torque: 0.2Nm(1.71lb`in)

Temp.Range: -40°C to $+105^{\circ}\text{C}$

Mechanical

Insulation resistance: 5000M Ω /DC1000V

Withstanding voltage: AC2000V/1Min

Wire range: 28-16AWG 1.5mm²

Contact resistance: 20m Ω


Rated current: 8A 7A

Rated voltage: 125V 130V

Standard:

Electrical

HOW TO ORDER

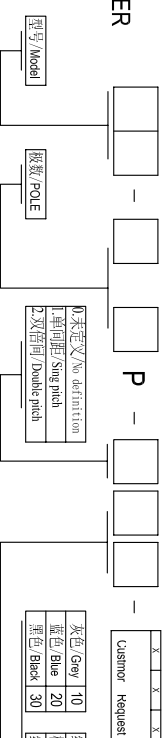

	X	X	X
Customer Request			

灰色 / Grey	10	绿色 / Green	40	透明 / Transparent	70
蓝色 / Blue	20	黄色 / Orange	50	黄色 / Yellow	80
黑色 / Black	30	红色 / Red	60	白色 / White	90

0. 未定义/No definition
1. 单间距/Sing pitch
2. 双间距/Double pitch

	linear dimension				fillet	chamfer	$\angle$	short angle	sid	$\equiv$	—	$\square$	//	$\perp$			
	over	over	over	over		over	over	over	over		over	over	over	over			
variable range	6	30	120	480		6	10	50	120		5	30	120	120			
to	to	to	to	to	all	to	to	to	to	all	to	to	to	to			
6	30	120	480		6	10	50	120		5	30	120					
tolerance	± 0.1	± 0.2	± 0.3	± 0.5	± 0.9	± 0.2	± 0.5	± 1	1°	30°	20°	10°	0.5	0.025	0.06	0.12	0.4

 UNITS					mm	SIZE	A4	SCALE		FIRST ANGLE PROJECTION 	
CIXI WANJIE ELECTRONIC CO., LTD										NAME	WJ15EDGK-XP-11Y-00A