




CIXI WANJIE ELECTRONIC CO., LTD

product specification

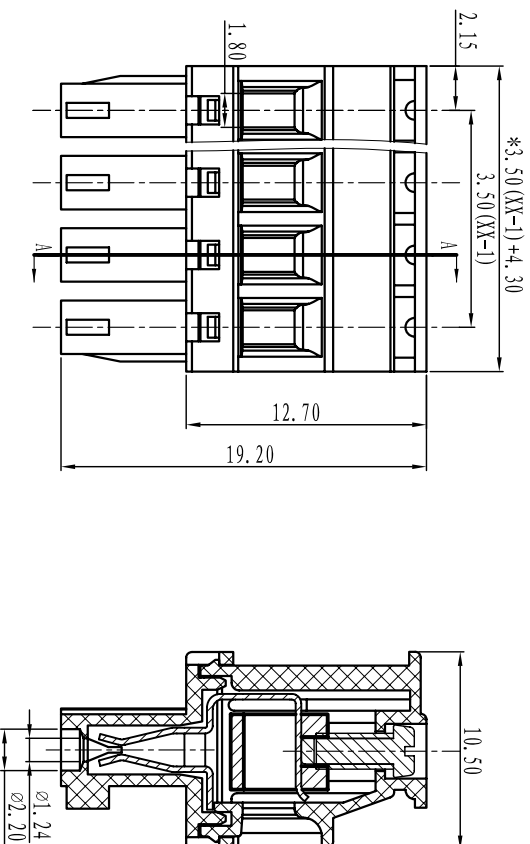

Electrical

Standard:	UL	IEC
-----------	----	-----

Rated voltage: 300V 250V

Rated current: 8A 7A

Contact resistance: 20m Ω

Wire range: 28-16AWG 1.5mm²

Withstanding voltage: AC2000V/1Min

Insulation resistance: 5000M Ω /DC1000V

Mechanical

Temp.Range: $-40^{\circ}\text{C}^{\wedge}+105^{\circ}\text{C}$

Torque: $0.2\text{Nm}(1.71\text{lb}\cdot\text{in})$

Strip length: 6–7 mm

Dimensions

Pitch: 3.50mm

Poles: 2P-24P

Material

Housing: PA66, UL94V-0

Screws: M2, steel Zinc plated

Wire guard: Brass, Ni plated

Clamp: Phosphor bronze, Ni plated

TOLERANCES EXCEPT AS NOTED

	linear dimension				fillet	chanfer	$\angle$	short angle sid	$\equiv$	—	$\square$	//	$\perp$
variable range	over	over	over	over		over	over	over	over	over	over	over	over
to	6	30	120	480		6	10	50	120	5	30	120	120
to	to	to	to	to	all	to	to	to	to	all	to	to	to
to	30	120	480		6	to	10	50	120	5	30	120	
tolerance	± 0.1	± 0.2	± 0.3	± 0.5	± 0.9	± 0.2	± 0.5	± 1	1°	$30'$	$20'$	$10'$	0.5
										0.025	0.06	0.12	0.4

HOW TO ORDER

型号/Model

规格/POLE

0. 未定义/No definition

1. 单间距/Single pitch

2. 双间距/Double pitch

客户需求
Customer Request

灰色 Grey

蓝色 Blue

黑色 Black

绿色 Green

橙色 Orange

红色 Red

透明 Transparent

黄色 Yellow

白色 White

10

20

30

40

50

60

70

80

90

UNITS	mm	SIZE	A4	SCALE	
-------	----	------	----	-------	--



CIXI WANJIE ELECTRONIC CO., LTD

FIRST ANGLE PROJECTION



NAME	WJ15EDGKA-3.50-XXP-1YY-00A
------	----------------------------