



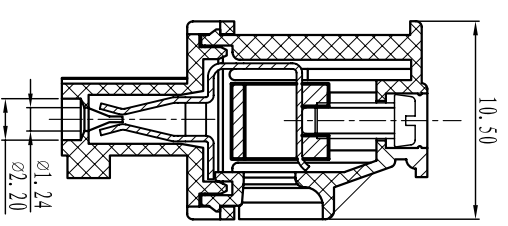


CIXI WANJIE ELECTRONIC CO., LTD

product specification

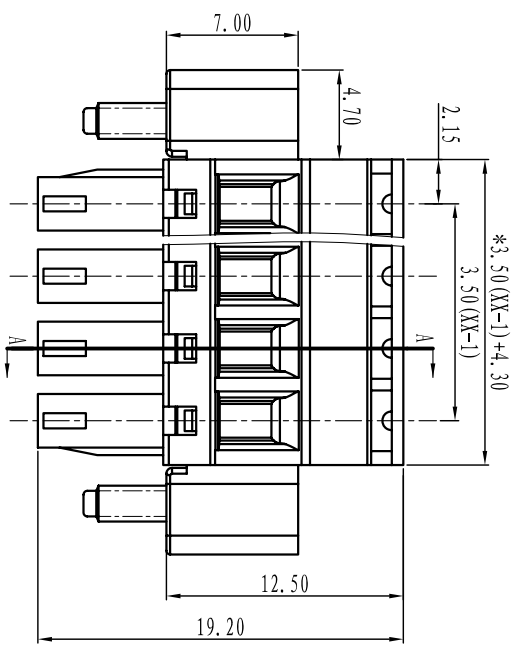

SECTION A-A

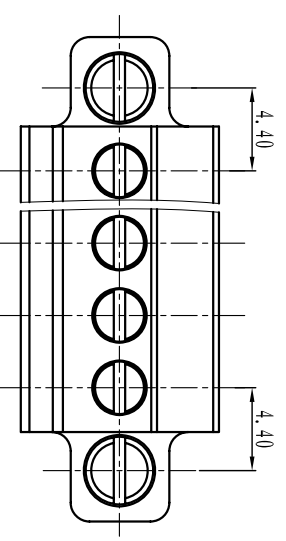

TOLERANCES EXCEPT AS NOTED

	linear dimension				fillet	chamfer	short angle sid						
variable range	6 to 6	30 to 120	over 120 to 480	over 480 to	all to 6	over 6 to 10	over 10 to 50	over 50 to 120	all to 5	over 5 to 30	over 30 to 120	over 120 to	
tolerance	± 0.1	± 0.2	± 0.3	± 0.5	± 0.9	± 0.2	± 0.5	± 1	1°	30'	20'	10'	0.5

HOW TO ORDER

型号/Model

极数/POLE

1. 未标注/No definition
2. 单面插/Single pitch
3. 双面插/Double pitch

Customer Request

UNITS	mm	SIZE	A4	SCALE
-------	----	------	----	-------

灰色/Grey	10	绿色/Green	40	透明/Transparent	70
蓝色/Blue	20	棕色/Orange	50	黄色/Yellow	80
黄色/Black	30	红色/Red	60	白色/White	90

Electrical
Standard: UL IEC
Rated voltage: 300V 250V
Rated current: 8A 7A
Contact resistance: 20mΩ
Wire range: 28-16AWG 1.5mm²
Withstanding voltage: AC2000V/1Min
Insulation resistance: 5000MΩ/DC1000V

Mechanical
Temp.Range: -40° C~+105° C
Torque: 0.2Nm(1.7lb`in)
Strip length: 6~7mm
Dimensions
Pitch: 3.50mm
Poles: 2P-24P

Material
Housing: PA66, UL94V-0
Screws: M2, steel Zinc plated
Wire guard: Brass, Ni plated
Clamp: Phosphor bronze, Ni plated

