



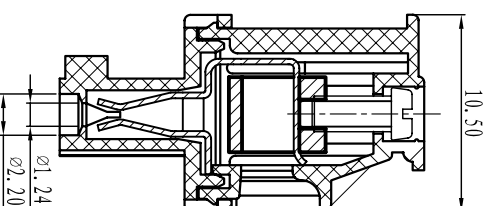

CIXI WANJIE ELECTRONIC CO., LTD

product specification

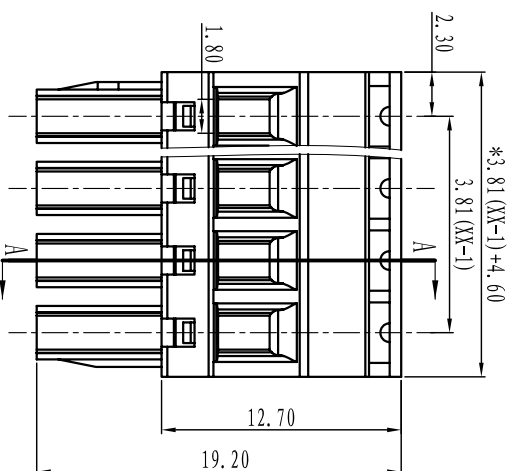

SECTION A-A

Electrical

Standard:	UL	IEC
-----------	----	-----

Rated voltage: 300V 250V

Rated current: 8A 7A

Contact resistance: 20m Ω

Wire range: 28-16AWG 1.5mm²

Withstanding voltage: AC2000V/1Min

Insulation resistance: 5000M Ω /DC1000V

Mechanical

Temp.Range: -40°C to $+105^{\circ}\text{C}$

Torque: 0.2Nm(1.71lb`in)

Strip length: 6–7 mm

Dimensions

Pitch: 3.81mm

Poles: 2P-24P


Material

Housing: PA66, UL94V-0

Screws: M2, steel Zinc plated

Wire guard: Brass, Ni plated

Clamp: Phosphor bronze, Ni plated

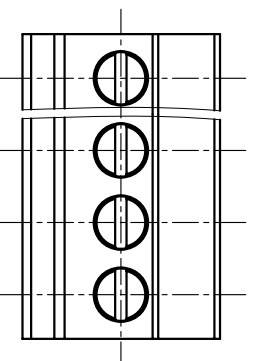

HOW TO ORDER

	linear dimension				fillet	chamfer	$\angle$	short angle sid				$\equiv$	—	$\square$	//	$\perp$	
	over	over	over	over				over	over	over	over						
variable	6	30	120	480		6		over	10	50	120			over	over	over	
range	to	to	to	to	all	to	to	to	to	to	to	all	to	to	to	to	
tolerance	± 0.1	± 0.2	± 0.3	± 0.5	± 0.9	± 0.2	± 0.5	± 1	1°	30°	20°	10°	0.5	0.025	0.06	0.12	0.4

UNITS	mm	SIZE	A4	SCALE	FIRST ANGLE PROJECTION 
					
CIXI WANJIE ELECTRONIC CO., LTD					NAME
					WJ15DECKB-3-81-XHP-11V-00