




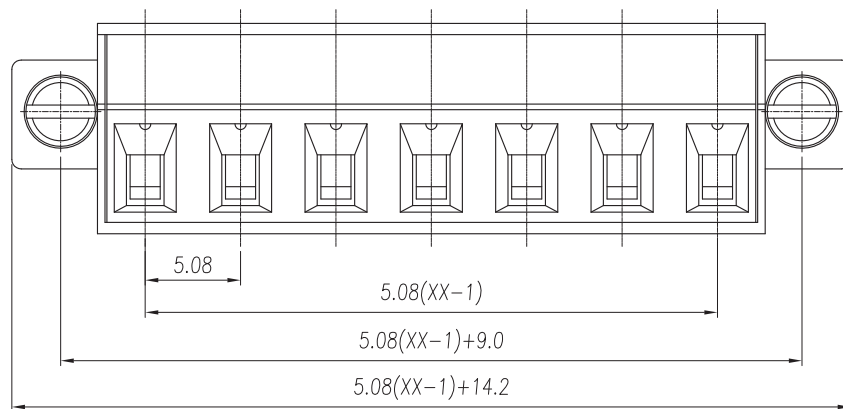

# CIXI WANJIE ELECTRONIC CO., LTD

THE SPEC SHEET

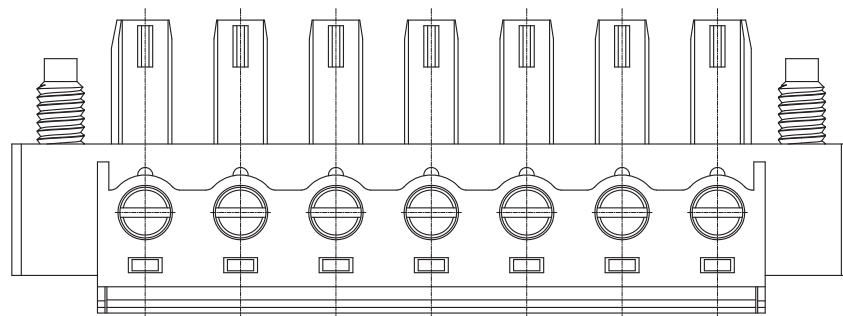

## Electrical

|                       |                |                    |
|-----------------------|----------------|--------------------|
| Standard              | UL             | IEC                |
| Rated voltage         | 300V           | 250V               |
| Rated current         | 8A             | 10A                |
| Contact resistance    | 20mΩ           |                    |
| Insulation resistance | 500MΩ/DC500V   |                    |
| Wire range            | 28~16AWG       | 1.0mm <sup>2</sup> |
| Wrth standing voltage | AC 2000V/1 Min |                    |

## Mechanical

|              |                 |
|--------------|-----------------|
| Torque(Max)  | 0.2Nm(1.7Lb.in) |
| Steip Length | 6-7mm           |
| Temp.Range   | -40°C~+105°C    |

## Dimensions

|       |        |
|-------|--------|
| Pitch | 5.08mm |
| Poles | 2~24p  |

## Material

|         |                           |
|---------|---------------------------|
| Housing | PA66, UL94V-0             |
| Screws  | M2.0 Steel, Zn plated     |
| Clamp   | Phosphor bronze,Ni plated |
| Cage    | Brass ,Ni plated          |

|                | linear dimension(Tolerances Standard GB/T 14486-2008) |              |               |               |               |               |                |                 |                 |                 |       | ≡    | —            | □              | //          | ⊥   |
|----------------|-------------------------------------------------------|--------------|---------------|---------------|---------------|---------------|----------------|-----------------|-----------------|-----------------|-------|------|--------------|----------------|-------------|-----|
| variable range | to 6                                                  | over 6 to 10 | over 10 to 18 | over 18 to 30 | over 30 to 50 | over 50 to 80 | over 80 to 120 | over 120 to 160 | over 160 to 200 | over 200 to 250 | all   | to 5 | over 5 to 30 | over 30 to 120 | over 120 to |     |
| tolerance      | ±0.1                                                  | ±0.14        | ±0.19         | ±0.25         | ±0.32         | ±0.43         | ±0.57          | ±0.72           | ±0.88           | ±1.05           | ±1.25 | 0.5  | 0.025        | 0.06           | 0.12        | 0.4 |

|                                                                                                                       |    |      |    |       |       |                        |                            |
|-----------------------------------------------------------------------------------------------------------------------|----|------|----|-------|-------|------------------------|----------------------------|
| UNITS                                                                                                                 | mm | SIZE | A4 | SCALE | 2.5:1 | THIRD ANGLE PROJECTION |                            |
|  CIXI WANJIE ELECTRONIC CO., LTD |    |      |    |       |       | TITLE                  | WJ15EDGKM-5.08-XXP-1YY-00A |