





CIXI WANJIE ELECTRONIC CO., LTD

THE SPEC SHEET

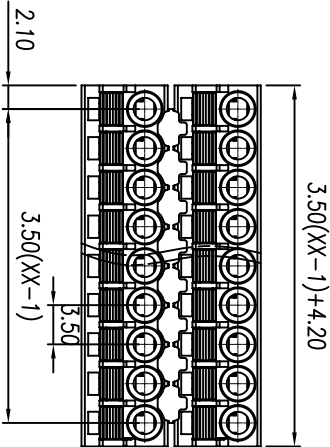

Electrical

- Standard : UL IEC
Rated voltage : 300V 250V
Rated current : 8A 10A
Contact resistance : 20m Ω
Wire range : 24-16AWG 1.0mm²
Withstanding voltage : AC2000V/1Min
Insulation resistance : 500M Ω /DC500V

Mechanical





- Temp. Range : -40 $^{\circ}$ C~+105 $^{\circ}$ C
Strip length : 9-10mm

Dimensions

- Pitch: 3.5mm,
Poles: 2P-24P

Material

- Housing: PA66,UL94V-0
Clamp: Phosphor bronze,Tin plated
shrapnel: stainless steel

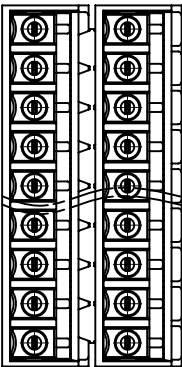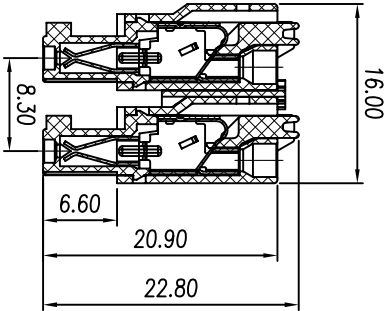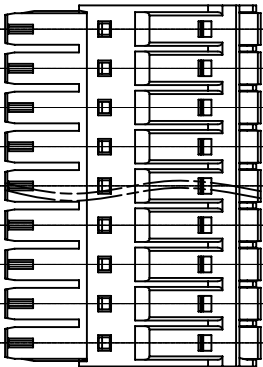

linear dimension(Tolerances Standard GB/T 14486-2008)													
	over	over	over	over	over	over	over	over	over	over	over	over	over
variable range	6 to	6 to	10 to	10 to	18 to	18 to	30 to	30 to	50 to	50 to	80 to	80 to	120 to
tolerance	±0.1	±0.14	±0.19	±0.25	±0.32	±0.43	±0.57	±0.72	±0.88	±1.05	±1.25	0.5	0.025

UNITS	mm	SIZE	A4	SCALE	1:5:1	THIRD ANGLE PROJECTION
CIXI WANJIE ELECTRONIC CO., LTD						
TITLE						WJ16EDGMB-3.5-24XP-1YY-004