




CIXI WANJIE ELECTRONIC CO., LTD

REVISION RECORD

REV.	DESCRIPTION	ECN No.	APPROVED	DATE

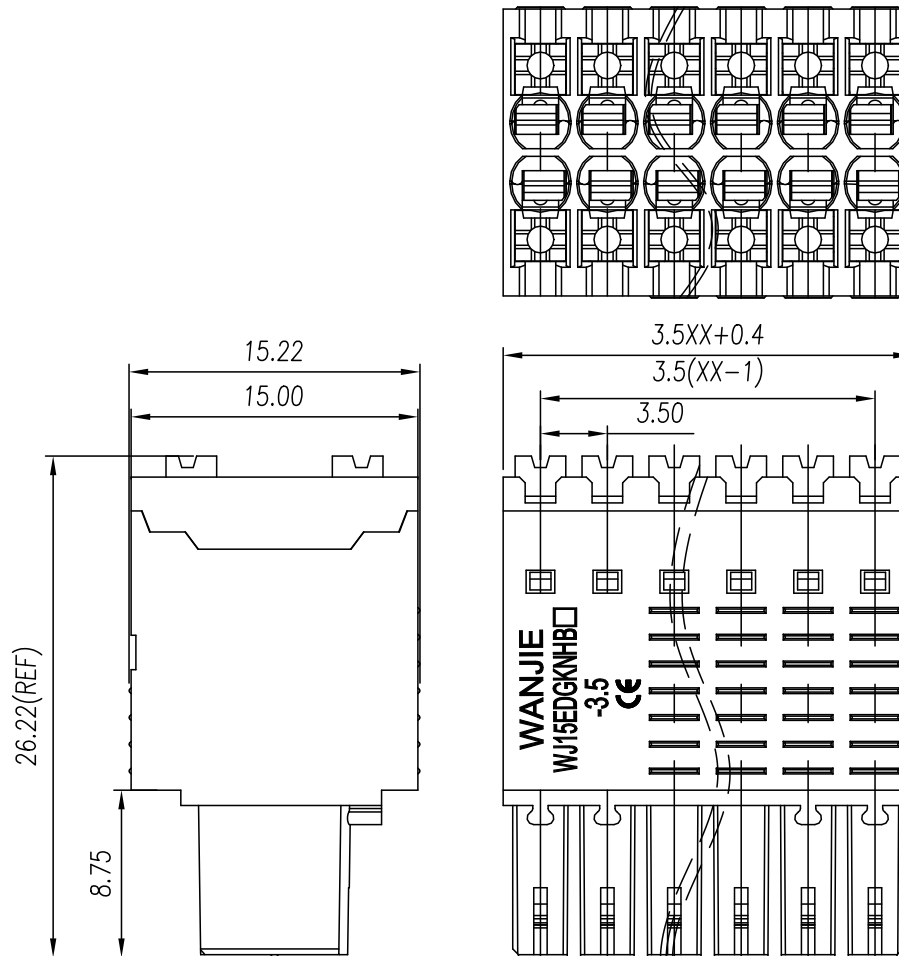

UL/CUL Technical Data				UL1059
Use Group		B	C	D
Rated Voltage [V]		300	50	300
Rated Current [A]		9.5	9.5	9.5
Wire Range Solid/Stranded [AWG]		26-16		
Withstanding Voltage		1600V/1Min		
IEC Technical Data				IEC61984
Overvoltage Category		III	III	II
Contamination Class		3	2	2
Rated Voltage [V]		160	160	320
Rated Current [A]		13.4	13.4	13.4
Impulse withstand voltage [KV]		2.5	2.5	2.5
Conductor cross section Solid/ flexible [mm ²]		0.2-1.5		
Material				
Insulation Material		PA		
Inflammability		UL94V-0		
Contact Material		Copper alloy		
Contactive Coating		Sn Plated		
Other Data				
Pitch / 极数 Poles [mm] / [P]		3.5 / 2*02~2*24		
Stripping Length [mm]		10~11		
Screw/ Torque(Max) [N.m]		-		
Operating temperature [°C]		-40~105		
Soldering temperature		-		
		-		
		-		

linear dimension(Tolerances Standard GB/T 14486-2008)								—	□	⊥
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to 250	to 10	over 10 to 100	over 100 to 250
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

UNITS	mm	SIZE	A4	SCALE	3:1	/THIRD ANGLE PROJECTION		REV	V0
						TITLE	WJ15EDGKNHB-3.5-2*XP-1YY-00A		