

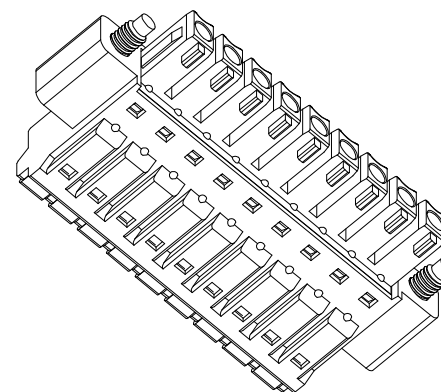


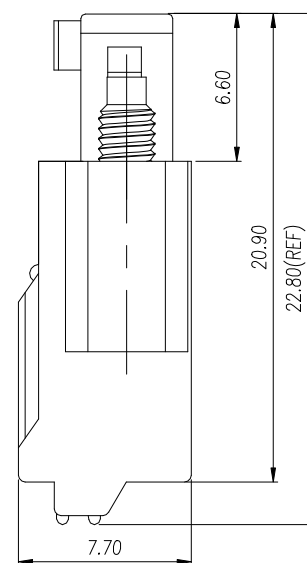

CIXI WANJIE ELECTRONIC CO., LTD


REVISION RECORD

REV.	DESCRIPTION	ECN No.	APPROVED	DATE

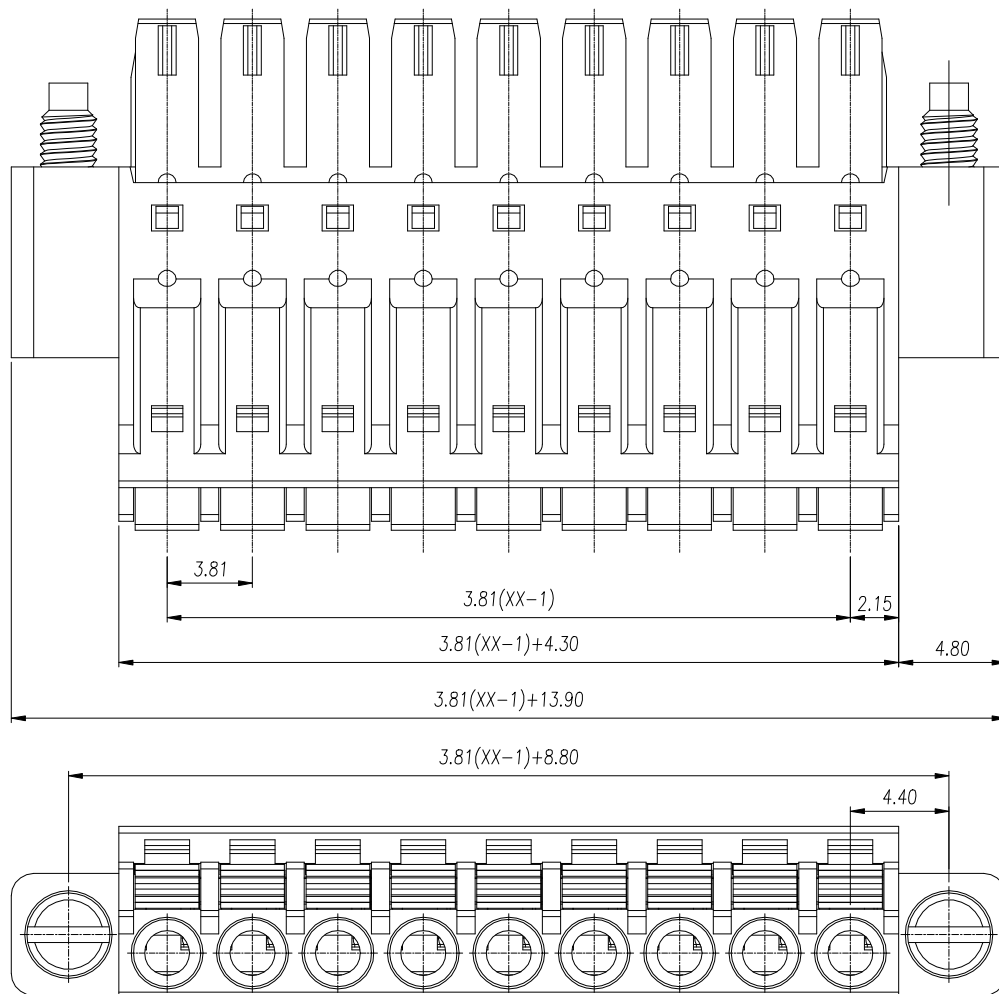

UL/CUL		c  US		
UL/CUL	Technical Data			
Use Group		B	C	D
Rated Voltage [V]		300	-	300
Rated Current [A]		8	-	8
Wire Range		24-16		
Solid/Stranded [AWG]				
Withstanding Voltage		1600V/1Min		
IEC		IEC61984		
IEC Technical Data				
Overvoltage Category		III	III	II
Contamination Class		3	2	2
Rated Voltage [V]		160	160	320
Rated Current [A]		8	8	8
Impulse withstand voltage [KV]		2.5	2.5	2.5
Conductor cross section Solid/ flexible [mm²]		0.2-1.5		
Material				
Insulation Material		PA66		
Imflamability		UL94V-0		
Contactor Material		铜合金 Copper alloy		
Contactive Coating		镀锡 Sn Plated		
Other Data				
Pitch /	Poles	[mm] / [P]	3.81 / 02~24	
Stripping Length		[mm]	9~10	
Screw/	Torque(Max)	[N.m]	-	
Operating temperature		[°C]	-40~105	
Soldering temperature			-	
Pin Dimensions		[mm]	-	
PCB Hole Diameter		[mm]	-	

linear dimension(Tolerances Standard GB/T 14486-2008)



variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30


/ UNITS mm

/ SIZE A4

/ SCALE 3:1

/ THIRD ANGLE PROJECTION

/ V0



REV



CIXI WANJIE ELECTRONIC CO., LTD

TITLE

WJ15EDGKNM-3.81-XXP-1YY-00A