







CIXI WANJIE ELECTRONIC CO., LTD

REVISION RECORD

REV.	DESCRIPTION	ECN No.	APPROVED	DATE

UL/CUL Technical Data		cULus		
Use Group		B	C	D
Rated Voltage	[V]	150	-	-
Rated Current	[A]	5	-	-
Wire Range		-		
Solid/Stranded	[AWG]	-		
Withstanding Voltage		1300V/1Min		
IEC Technical Data		IEC61984		
Overvoltage Category		III	III	II
Contamination Class		3	2	2
Rated Voltage	[V]	80	160	320
Rated Current	[A]	5	5	5
Impulse withstand voltage	[KV]	1.5	2.5	2.5
Conductor cross section		-		
Solid/ flexible	[mm ²]	-		
Material				
Insulation Material		PA66		
Flammability		UL94V-0		
Contact Material		Copper alloy		
Contactive Coating		Sn Plated		
Other Data				
Pitch / Poles	[mm] / [P]	2.5 / 02-24		
Stripping Length	[mm]	-		
Screw/ Torque(Max)	[N.m]	-		
Operating temperature	[°C]	-40~105		
Soldering temperature		260°C/5S		
Pin Dimensions	[mm]	0.8*0.8		
PCB Hole Diameter	[mm]	Ø1.4		

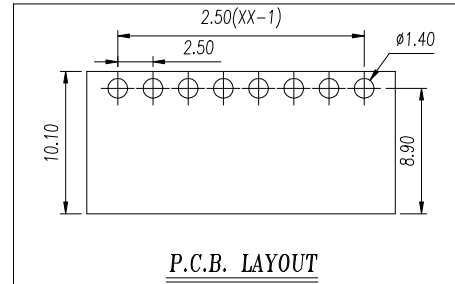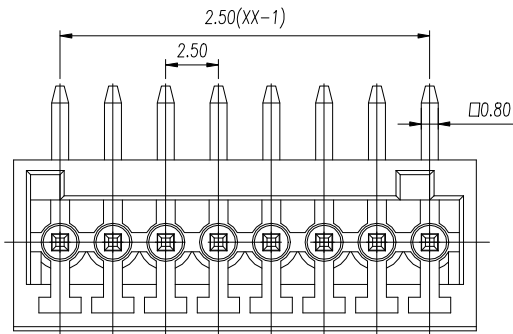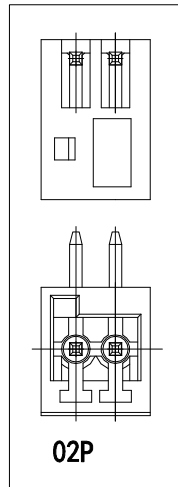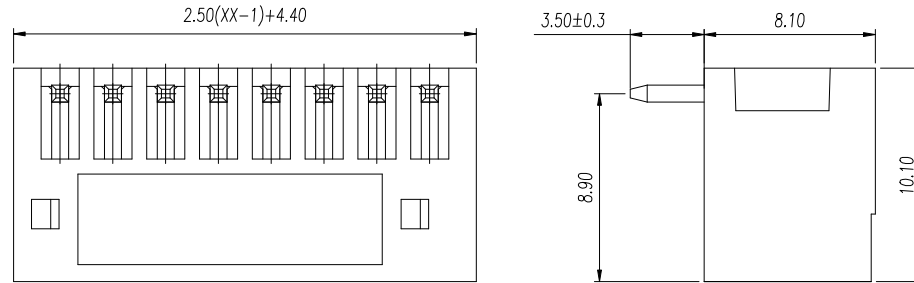

linear dimension(Tolerances Standard GB/T 14486-2008)




variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to 250	over 250 to 500	over 500 to 1000
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	±2.00	±2.50

UNITS mm

SIZE A4

SCALE 3:1

THIRD ANGLE PROJECTION



REV V0



CIXI WANJIE ELECTRONIC CO., LTD

TITLE WJ15EDGRC-2.5-XXP-1YY-00A