

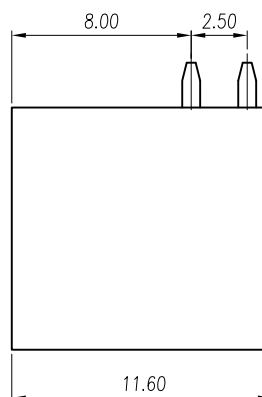
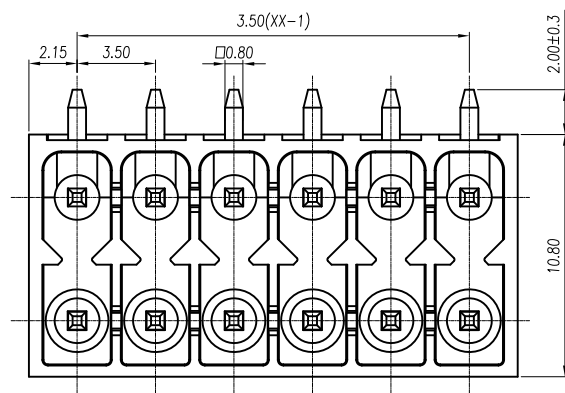


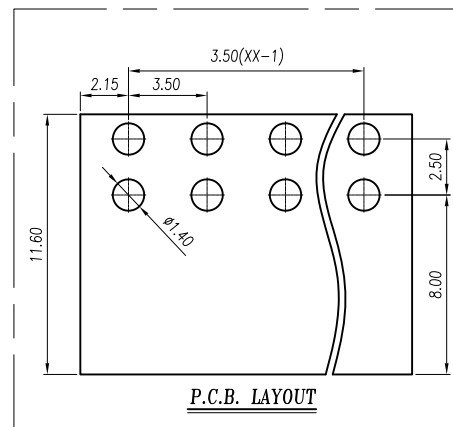

CIXI WANJIE ELECTRONIC CO., LTD

REVISION RECORD

REV.	DESCRIPTION	ECN No.	APPROVED	DATE

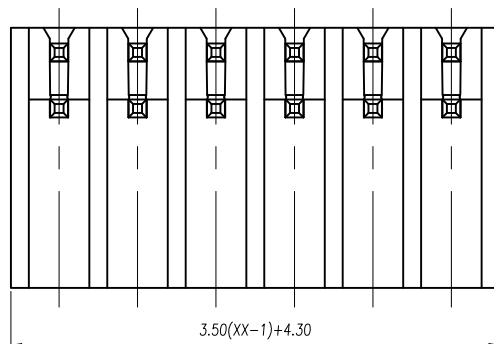

UL/CUL		cULus		
Technical Data				
Use Group		B	C	D
Rated Voltage [V]		150	-	150
Rated Current [A]		8	-	8
Wire Range		-		
Solid/Stranded [AWG]				
Withstanding Voltage		1300V/1Min		
IEC Technical Data		IEC61984		
Overvoltage Category		III	III	II
Contamination Class		3	2	2
Rated Voltage [V]		160	160	250
Rated Current [A]		8	8	8
Impulse withstand voltagea [KV]		2.5	2.5	2.5
Conductor cross section		-		
Solid/ flexible [mm²]				
Material				
Insulation Material		LCP		
Imflammability		UL94V-0		
Contactor Material		Copper alloy		
Contactive Coating		Sn Plated		
Other Data				
Pitch / Poles	[mm] / [P]	3.5 / 2*02~2*24		
Stripping Length [mm]		-		
Screw/ Torque(Max)	[N.m]	-		
Operating temperatur [°C]		-40~130		
Pin Dimensions [mm]		0.8*0.8		
PCB Hole Diameter [mm]		Ø1.4		

linear dimension(Tolerances Standard GB/T 14486-2008)									
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to 250	over 250 to 500	over 500 to 1000
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	±2.00	±2.50

UNITS	mm	SIZE	A4	SCALE	3:1	THIRD ANGLE PROJECTION		REV	V0
CIXI WANJIE ELECTRONIC CO., LTD						WJ15EDGRHC-THR-3.5-2*XXP-1YY-00A			