

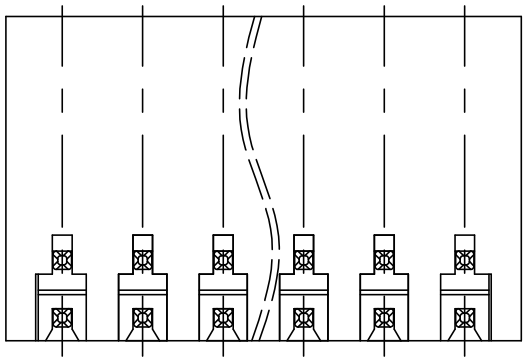


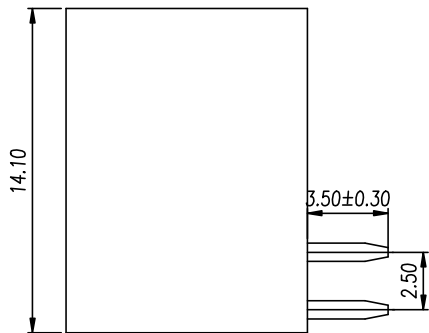

REVISION RECORD				
REV.	DESCRIPTION	ECN No.	APPROVED	DATE

P.C.B. LAYOUT

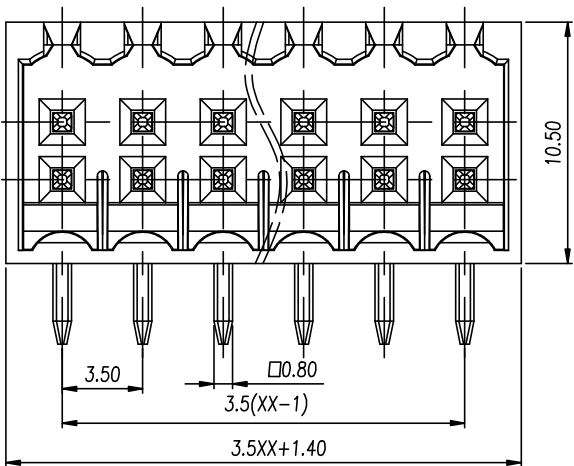

UL/CUL	Technical Data					
UL/CUL	Technical Data					
Use Group				B	C	D
Rated Voltage [V]				150	—	—
Rated Current [A]				7	—	—
Wire Range				/		
Solid/Stranded [AWG]						
Withstanding Voltage				1300V/1Min		
IEC				IEC 61984		
IEC Technical Data						
Overvoltage Category				III	III	II
Contamination Class				3	2	2
Rated Voltage [V]				80	125	250
Rated Current [A]				10	10	10
Impulse withstand voltage [KV]				2.5	2.5	2.5
Conductor cross section				/		
Solid/ flexible [mm²]						
Material						
Insulation Material				PA66		
Inflammability				UL94V-0		
Contactor Material				Copper alloy		
Contactive Coating				Sn Plated		
Other Data						
Pitch [mm]				3.5		
Poles [P]				2*02~2*24		
Stripping Length [mm]				/		
Screw				/		
Torque(Max) [N.m]				/		
Operating temperature [°C]				-40~105		

linear dimension(Tolerances Standard GB/T 14486-2008)								—		
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

UNITS	mm	SIZE	A4	SCALE	3:1	THIRD ANGLE PROJECTION		REV	V0
 CIXI WANJIE ELECTRONIC CO., LTD									
						名 TITLE	WJ15EDGRHSC-3.5-2*XXP-1YY-00A		