

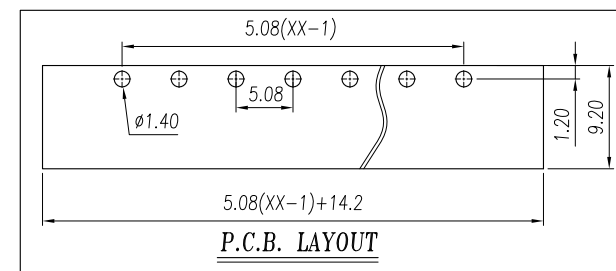
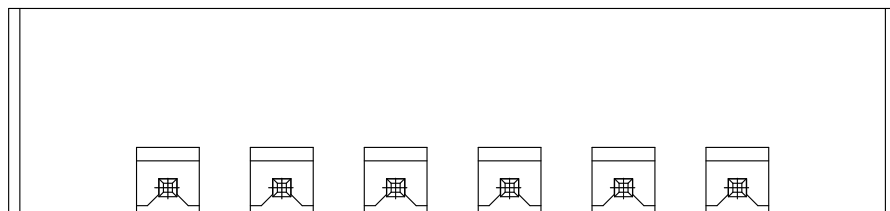


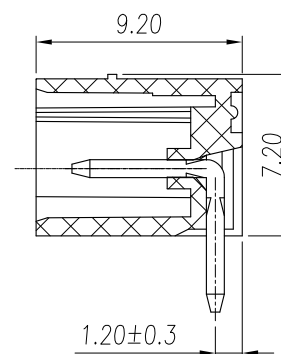

CIXI WANJIE ELECTRONIC CO., LTD

THE SPEC SHEET

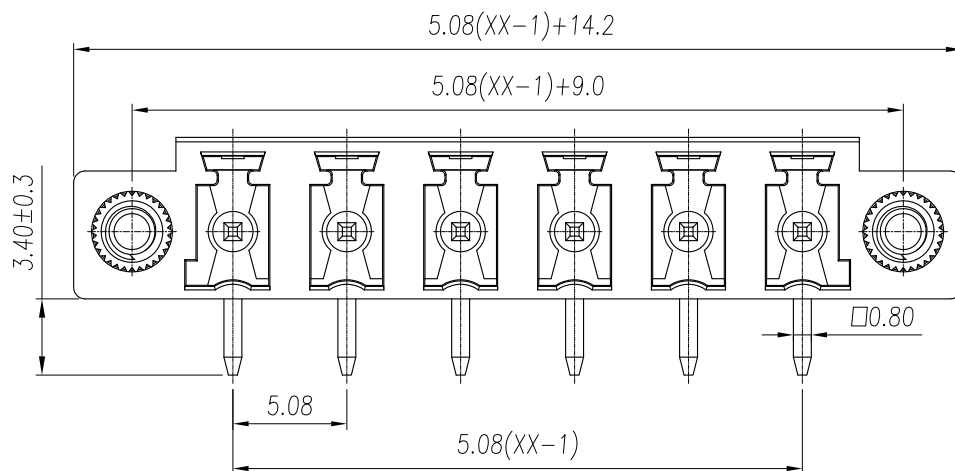

Standard UL IEC

Rated voltage 300V 250V

Rated current 8A 10A

Contact resistance 20mΩ

Insulation resistance 500MΩ/DC500V

Wrth standing voltage AC 2000V/1 Min

Mechanical

Temp.Range -40°C~+105°C

Temp.Range +250°C 5秒

Dimensions

Pitch 5.08mm

Poles 2~24p

Material

Housing PA66, UL94V-0

Pin header Brass ,Tin plated

	linear dimension(Tolerances Standard GB/T 14486-2008)											≡	—	□	//	⊥
variable range	to 6	over 6 to 10	over 10 to 18	over 18 to 30	over 30 to 50	over 50 to 80	over 80 to 120	over 120 to 160	over 160 to 200	over 200 to 250	all	to 5	over 5 to 30	over 30 to 120	over 120 to	
tolerance	±0.1	±0.14	±0.19	±0.25	±0.32	±0.43	±0.57	±0.72	±0.88	±1.05	±1.25	0.5	0.025	0.06	0.12	0.4

UNITS	mm	SIZE	A4	SCALE	3:1	THIRD ANGLE PROJECTION	
CIXI WANJIE ELECTRONIC CO., LTD						TITLE	WJ15EDGRM-5.08-XXP-1YY-00A