




CIXI WANJIE ELECTRONIC CO., LTD

THE SPEC SHEET

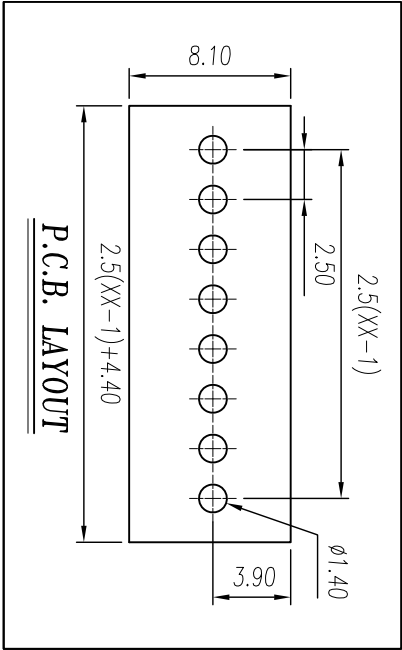



P.C.B. LAYOUT

Standard	UL	IEC
Rated voltage	150V	250V
Rated current	5A	6A
Contact resistance	20mΩ	
Insulation resistance	500MΩ /DC500V	
With standing voltage	AC 1250V/1 Min	

Mechanical	
Temp.Range	-40°C~+105°C
Temp.Range	+250°C 5秒

Dimensions	
Pitch	2.5mm
Poles	2~24p
Material	

Housing	PA66, UL94V-0
Pin header	Brass ,Tin plated

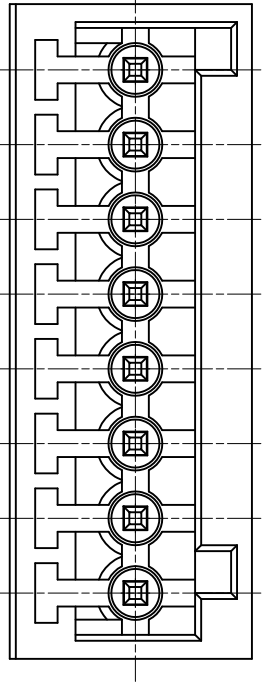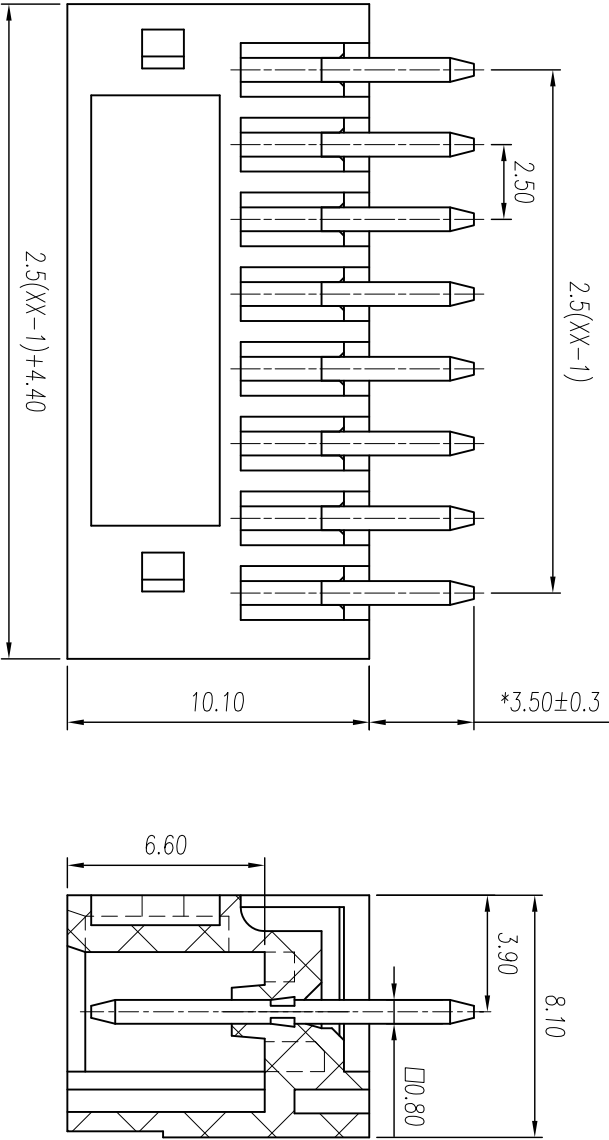

linear dimension(Tolerances Standard GB/T 14486--2008)											
variable range	over	over	over	over	over	over	over	over	over	over	over
	6 to	10 to	18 to	30 to	50 to	80 to	120 to	160 to	200 to	250 to	all to
tolerance	±0.1	±0.14	±0.19	±0.25	±0.32	±0.43	±0.57	±0.72	±0.88	±1.05	±1.25



CIXI WANJIE ELECTRONIC CO., LTD

TITLE

WJ16ED61C-2.5-XXP-1YY-00A

UNITS

mm

SIZE

A4

SCALE

4:1

THIRD ANGLE PROJECTION

