

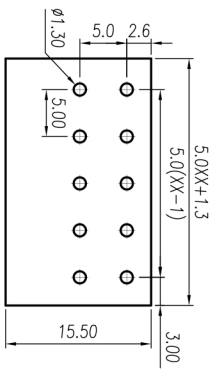


# CIXI WANJIE ELECTRONIC CO., LTD

THE SPEC SHEET

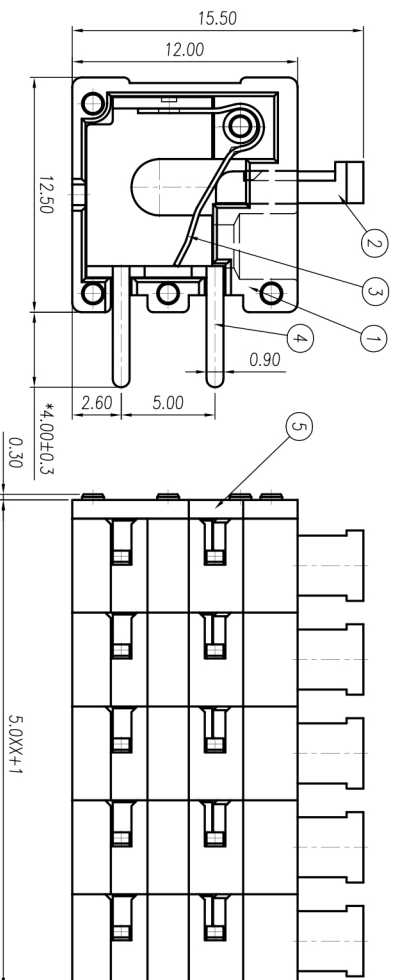


P.C.B. LAYOUT

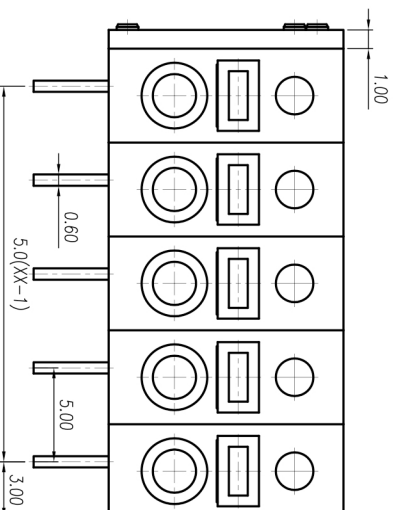

linear dimension (Tolerances Standard GB/T 14486-2008)

variable range	6 to 10	6 to 10	10 to 18	18 to 30	30 to 50	50 to 80	80 to 120	120 to 160	160 to 200	200 to 250	250 to 300	300 to 400	400 to 500	500 to 600	600 to 800	800 to 1000	1000 to 1200	1200 to 1500	1500 to 2000	
tolerance	±0.1	±0.14	±0.19	±0.25	±0.32	±0.43	±0.57	±0.72	±0.88	±1.05	±1.25	0.5	0.025	0.06	0.12	0.4				

<b>Standard</b>	UL	IEC
<b>Rated voltage</b>	300V	250V
<b>Rated current</b>	10A	15A
<b>Contact resistance</b>	20mΩ	
<b>Insulation resistance</b>	500MΩ / DC500V	
<b>Wire range</b>	26-14AWG	1.5mm <sup>2</sup>
<b>Wrth standing voltage</b>	AC 2000V/1 Min	
<b>Mechanical</b>		
<b>MAX Soldering</b>	+250°C for 5 Sec	
<b>Steip Length</b>	11mm	
<b>Temp. Range</b>	-40°C~+105°C	
<b>Dimensions</b>		
<b>Pitch</b>	5mm	
<b>Poles</b>	1-XXp	
<b>Material</b>		
<b>Housing</b>	PA66, UL94V-0	
<b>Pin header</b>	Brass, Tin plated	
<b>Wire guard</b>	Stainless steel	



CIXI WANJIE ELECTRONIC CO., LTD

THIRD ANGLE PROJECTION



TITLE WJ211R-5.0-XXP-1YY-00A