






CIXI WANJIE ELECTRONIC CO., LTD

THE SPEC SHEET

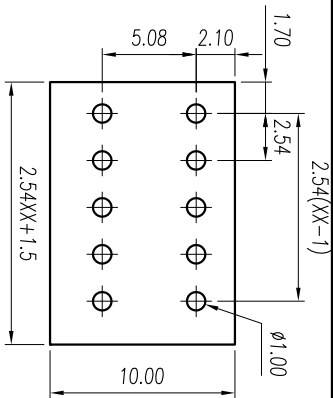

P.C.B. LAYOUT

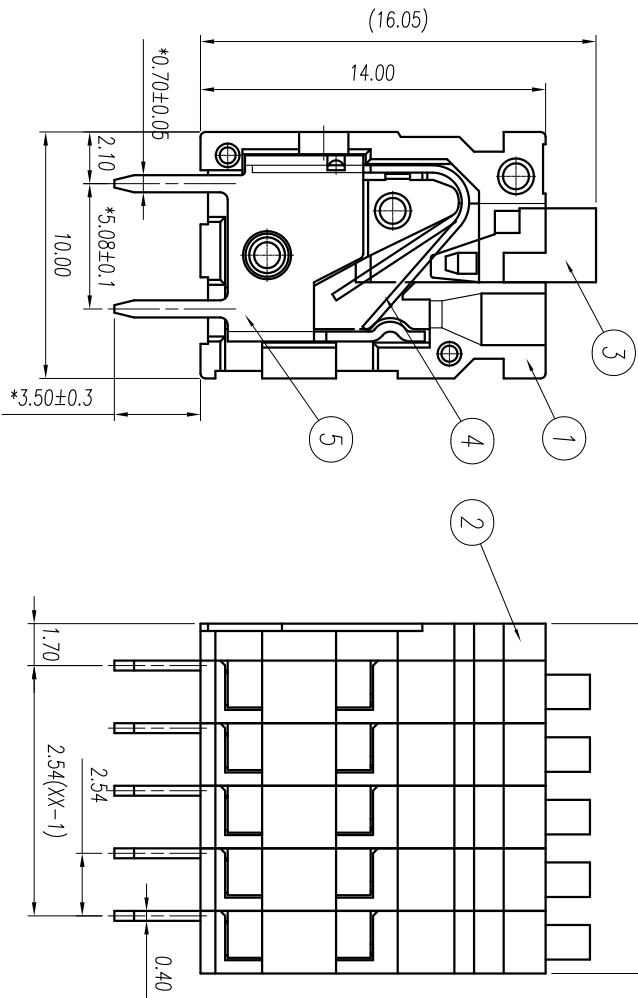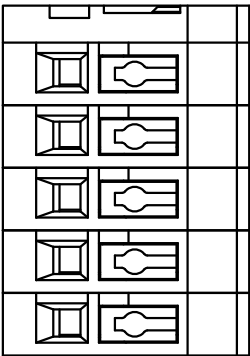

Mechanical

Standard	UL	IEC
Rated voltage	150V	130V
Rated current	5A	6A
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Wire range	26~20AWG	0.5mm²
Wrth standing voltage	AC 1250V/1 Min	

MAX Soldering	+250°C for 5 Sec
Steip Length	12mm
Temp.Range	-40°C~+105°C

Dimensions	
Pitch	2.54mm
Poles	1-XXp

Material	
Housing	PA66, UL94V-0
Pin header	Brass, Tin plated
Wire guard	Stainless steel

linear dimension(Tolerances Standard GB/T 14486-2008)											
variable range	to	over	to	over	to	over	to	over	to	over	to
	6	10	10	18	30	50	80	120	160	200	250
	to	to	to	to	to	to	to	to	to	to	to
	10	18	30	50	80	120	160	200	250	all	5
tolerance	±0.1	±0.14	±0.19	±0.25	±0.32	±0.43	±0.57	±0.72	±0.88	±1.05	±1.25

UNITS	mm	SIZE	A4	SCALE	3:1	THIRD ANGLE PROJECTION	
CIXI WANJIE ELECTRONIC CO., LTD						TITLE	WJ2711V-2.54-XXP-1YY-00A