







CIXI WANJIE ELECTRONIC CO., LTD

REVISION RECORD

REV.	DESCRIPTION	ECN No.	APPROVED	DATE



P.C.B. LAYOUT

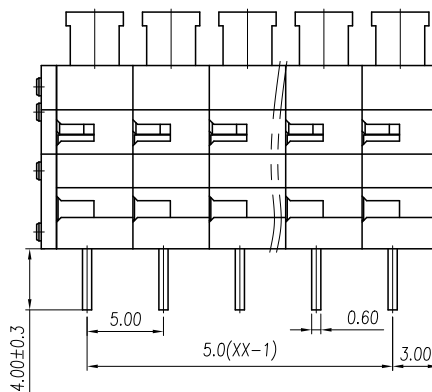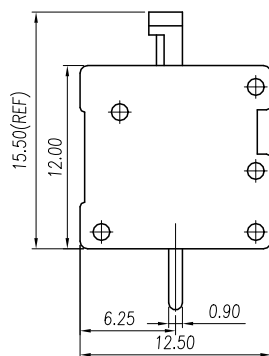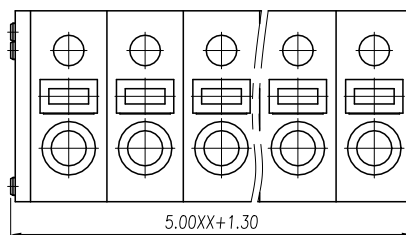

UL/CUL UL/CUL		Technical Data			
Use Group		B	C		
Rated Voltage		[V]	300	-	-
Rated Current		[A]	10	-	-
Wire Range Solid/Stranded		[AWG]	26-14		
Withstanding Voltage		1600V/1Min			
IEC		IEC60947-7-4			
IEC Technical Data					
Overvoltage Category		III	III		
Contamination Class		3	2		
Rated Voltage		[V]	320	320	630
Rated Current		[A]	17.5	17.5	17.5
Impulse withstand voltage		[KV]	4.0	4.0	4.0
Wire cross section Solid/ flexible		[mm²]	0.2-1.5		
Material					
Insulation Material		PA66			
Flammability		UL94V-0			
Conductor Material		Copper alloy			
Conductor Plating		Sn Plated			
Other Data					
Pitch / Poles		[mm] / [P]	5.0/ 01-30		
Stripping Length		[mm]	8		
Screw/ Torque(Max)		[N.m]	/		
Operating temperature		[°C]	-40~105		
Soldering temperature		[°C]	260°C/5S		
		[mm]	0.9*0.6		
PCB	PCB Hole Diameter	[mm]	Ø1.3		

linear dimension(Tolerances Standard GB/T 14486-2008)									
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to 10	over 10 to 100	over 100 to 100
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30

UNITS	mm	SIZE	A4	SCALE	3:1	/THIRD ANGLE PROJECTION		REV	V0
CIXI WANJIE ELECTRONIC CO., LTD						TITLE	WJ211V-5.0-XXP-1YY-00A		