
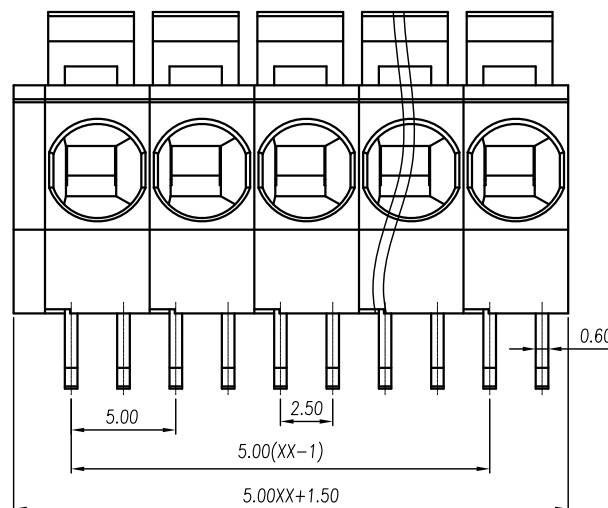
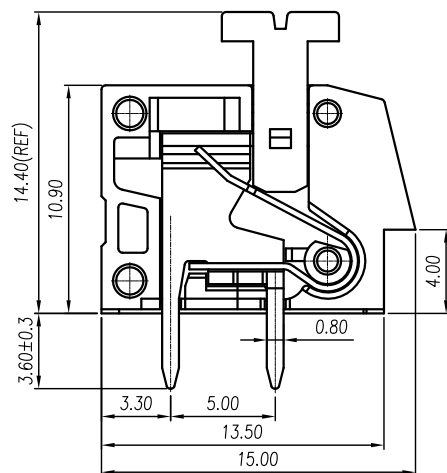
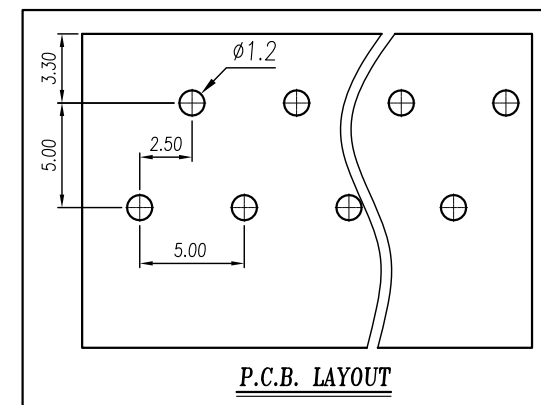
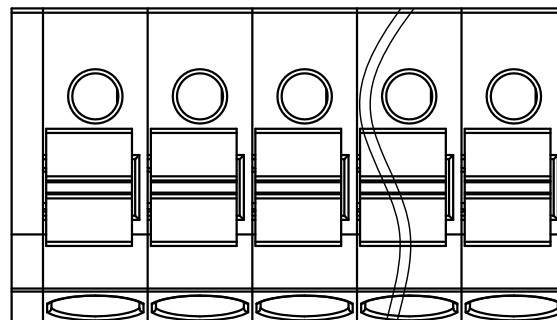


CIXI WANJIE ELECTRONIC CO., LTD

THE SPEC SHEET

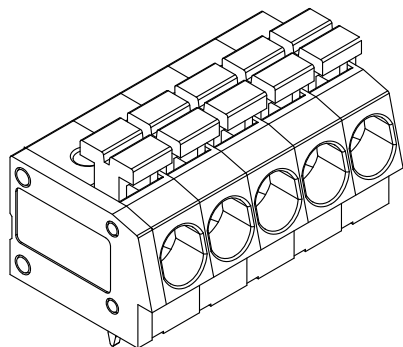

Electrical
Standard: UL IEC
Rated voltage: 300V 250V
Rated current: 12A 16A
Contact resistance: 20m Ω
Wire range: 20-12AWG 2.5mm²
Withstanding voltage: AC2000V/1Min
Insulation resistance: 500M Ω /DC500V

Mechanical
Temp.Range: -40 $^{\circ}$ C~+105 $^{\circ}$ C
Strip length: 10-11mm

Dimensions
Pitch: 5.0mm,
Poles: 01-XXP

Material
Housing: PA66, UL94V-0
Pin header: Copper alloy Sn plated
shrapnel: stainless steel

	linear dimension(Tolerances Standard GB/T 14486-2008)											≡	—	□	//	⊥
variable range	to 6	over 6 to 10	over 10 to 18	over 18 to 30	over 30 to 50	over 50 to 80	over 80 to 120	over 120 to 160	over 160 to 200	over 200 to 250	over 250 to	all	to 5	over 5 to 30	over 30 to 120	over 120 to
tolerance	±0.1	±0.14	±0.19	±0.25	±0.32	±0.45	±0.57	±0.72	±0.88	±1.05	±1.25	0.5	0.025	0.06	0.12	0.4

UNITS	mm	SIZE	A4	SCALE	3:1	THIRD ANGLE PROJECTION	
CIXI WANJIE ELECTRONIC CO., LTD						TITLE	WJ237-5.0-XXP-1YY-00A